

SPECIFICATIONS

Current Rating: 3 Amperes

Voltage Rating: 250V AC, DC

Dielectric Withstanding Voltage:



1500 AC For 60 Seconds

Contact Resistance: 20 Milliohms Max

Insulation Resistance: 1000 Megohms Min

Ambient Temperature Range: -40°C To +105°C

Material: Nylon 66, UL 94V-0

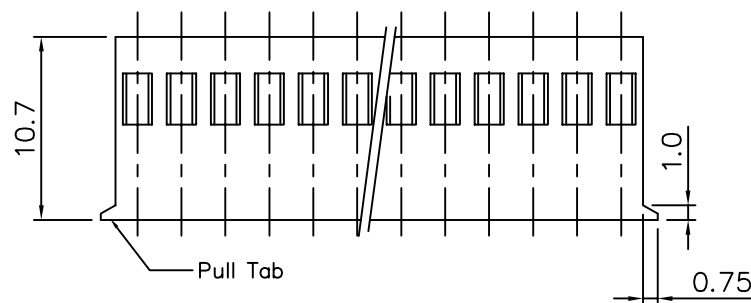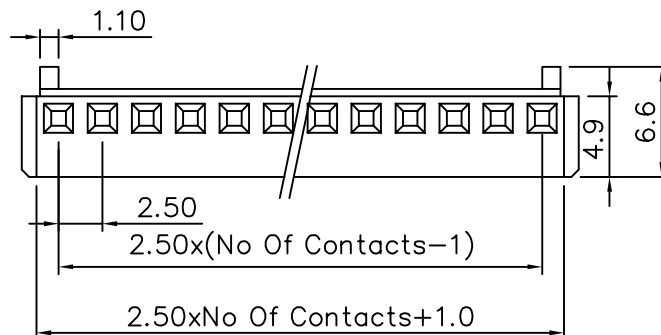

4UCON

元化興業股份有限公司

4UCON TECHNOLOGY INC.

DRAWING No.

01767

APPROVED BY

CHECKED BY

DRAWING BY

MEI

RAN

HZF

REV.

A

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG.

UNIT

mm

Symbol for hole and feature control

AREA	REVISIONS	CHK	DATE