

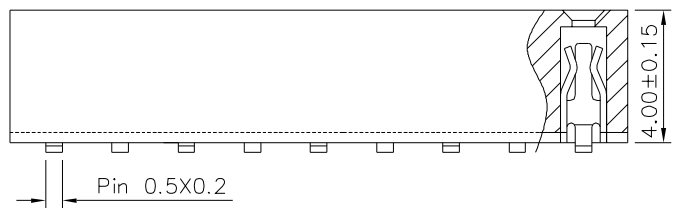


SPECIFICATION
 Current Rating: 1.5A
 Insulation Resistance: 1000 Megaohms Min.
 Contact Resistance: 20 Milliohms Max.
 Withstand Voltage: 500V AC Min./Minute
 Operation Temperature: -40°C ~ +105°C
 Insulator: PA9T(UL94V-0), Black
 Contact: Phosphor Bronze, Gold Flash Over Nickel
 RoHS Compliant

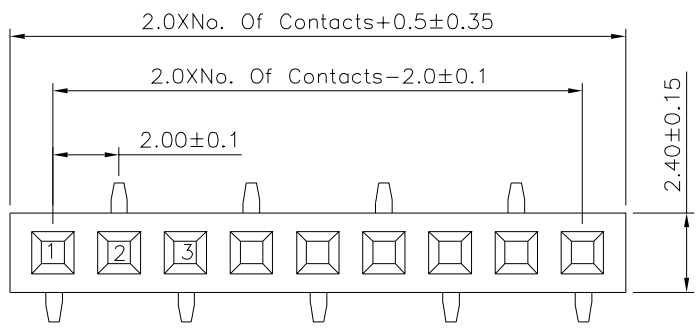

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
01807		MEI		
		CHECKED BY HZF		
SCALE		DRAWING BY		<5 ±0.05 ANG. ±0.03°
NONE		LSM		5~25 ±0.10
REV.		A0		25~80 ±0.15
				>80 ±1.20
				UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△	A0	NEW RELEASE	HZF	03/20/2024