

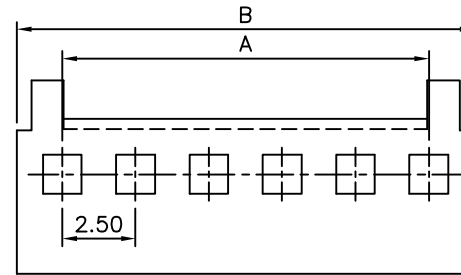


△ SPECIFICATION



Electrical Rating:UL 250V 1A,AC/DC
CSA 250V 1A,AC/DC
Material:PA66(UL94V-0)
RoHS Compliant

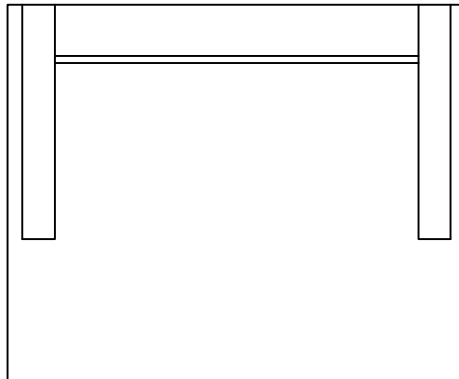

△

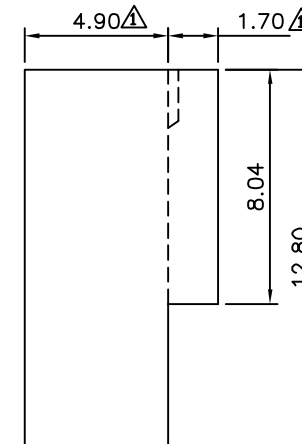

△

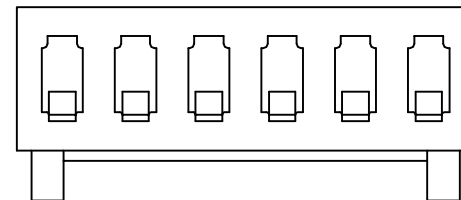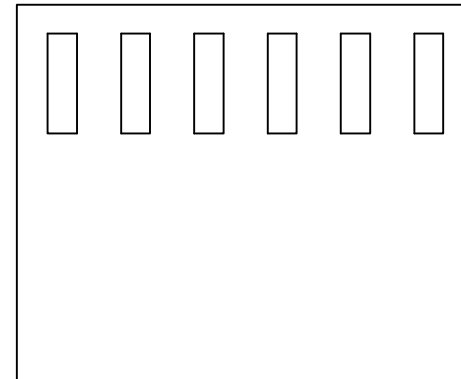

△

△

Pin	A	B	Pin	A	B
2	2.50	5.60	14	32.50	35.60
3	5.00	8.10	15	35.00	38.10
4	7.50	10.60	16	37.50	40.60
5	10.00	13.10	17	40.00	43.10
6	12.50	15.60	18	42.50	45.60
7	15.00	18.10	19	45.00	48.10
8	17.50	20.60	20	47.50	50.60
9	20.00	23.10	21	50.00	53.10
10	22.50	25.60	22	52.50	55.60
11	25.00	28.10	23	55.00	58.10
12	27.50	30.60	24	57.50	60.60
13	30.00	33.10	25	60.00	63.10

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

01881

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS


REV.

A1

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE
X ±0.30
△.XX ±0.20
.XXX ±0.10
ANG. ±2°

UNIT
mm



△ A1

Modify Data

HZF

10/25/2011

△ A0

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE