
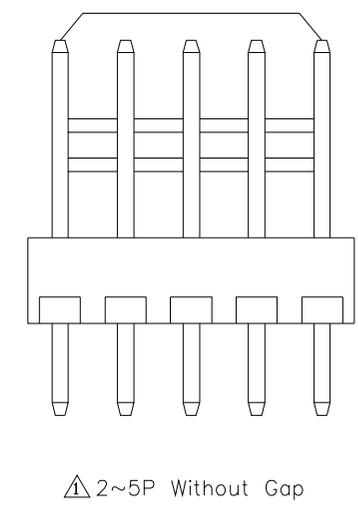
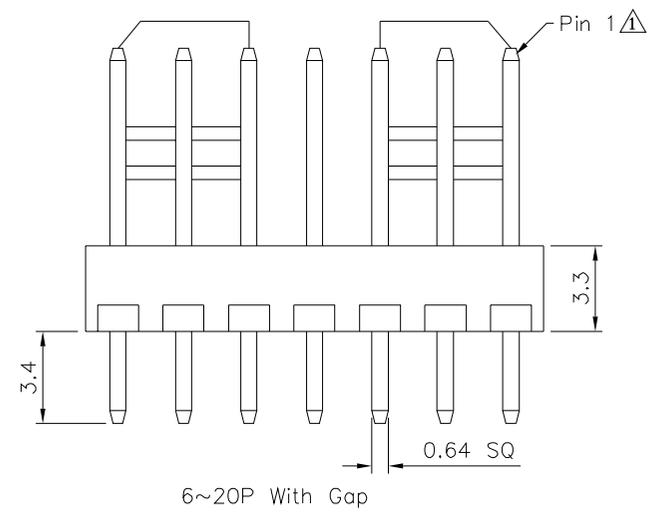
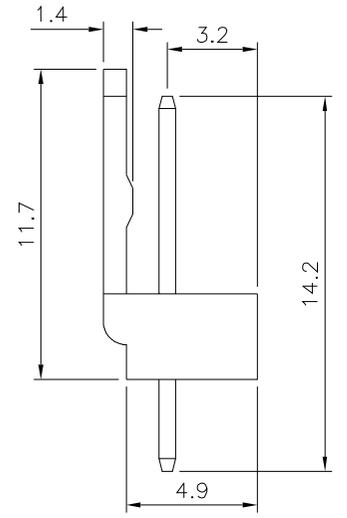
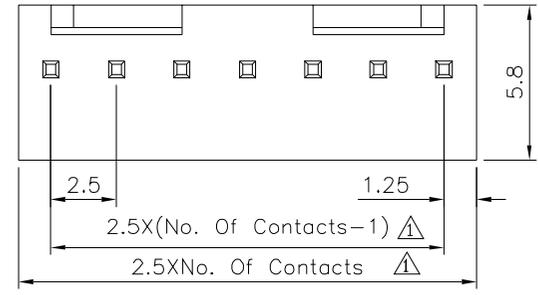


SPECIFICATION

Current Rating:3A Max
 Voltage Rating:250V AC,DC
 Withstanding Voltage:1500V AC/Minute
 Ambient Temperature Range:-40°C~105°C
 Insulator:PA66(UL94V-0)
 Pin:Brass,Tin Plated
 RoHS Compliant

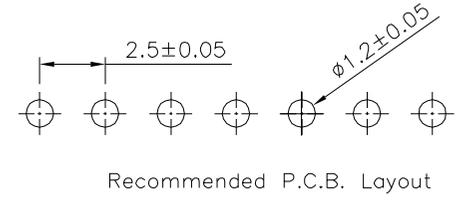

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.4 .XX ±0.25 .XXX ±0.08
01892		MEI		
		CHECKED BY	HZF	
		DRAWING BY	LXX	
SCALE	NONE	REV.	A1	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	02/25/2025
△ A0		NEW RELEASE	HZF	01/25/2008