


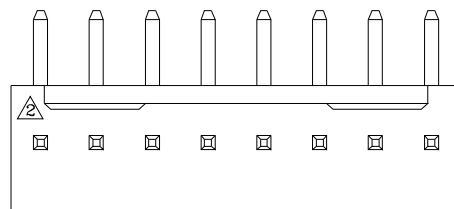




Recommended P.C.B. Layout



2~5 Pin

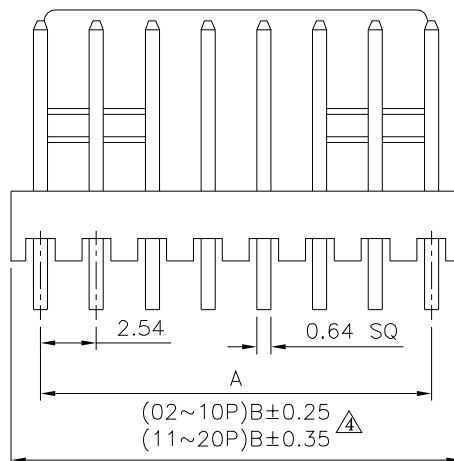

△26~20 Pin

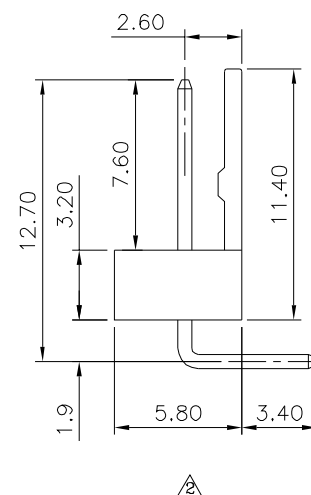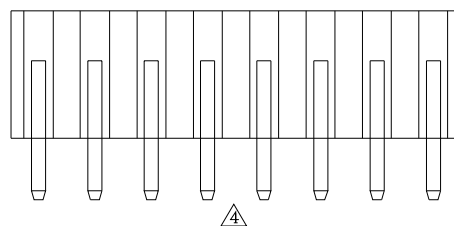

2.1 SPECIFICATION

Current Rating:3A AC/DC
Voltage Rating:250V AC Max.
Withstanding Voltage:1000V AC/Minute
Operation Temperature:-25°C~+85°C
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
④ Contact:Brass,Tin Plated Over Nickel
Insulator:PA66(UL94V-2)
RoHS Compliant

Pin	A	B
2	2.54	5.12
3	5.08	7.66
4	7.62	10.20
5	10.16	12.74
6	12.70	15.30
7	15.24	17.94
8	17.78	20.48
9	20.32	23.02
10	22.86	25.58
11	25.40	28.12
12	27.94	30.66
13	30.48	33.10
14	33.02	35.80
15	35.56	38.34
16	38.10	40.94
17	40.64	43.30
18	43.18	45.90
20	48.26	50.80

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No. 43

01988

SCALE	NONE
-------	------

NONE

APPROVED BY	
-------------	--

MEI

CHECKED BY	1175
------------	------

 HZF

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

	.X	± 0.35
	.XX	± 0.25
	ANG.	

UNIT
123.123

	$\triangle$	A4
--	-------------	----

	A4
--	----

4	Modify Data
---	-------------

$\triangle 3$	A3
---------------	----

	A3
--	----

3	Modify Data
---	-------------

A2	

	A2
--	----

2	Modify Data
---	-------------

	A1
---	----

	A1
--	----

1	Modify Data
---	-------------

		A0
--	---	----

	A0
--	----

0	NEW RELEASE
---	-------------

HZF	05/08/2015
-----	------------

HZF	09/13/2012
-----	------------

HZF	06/18/2010
-----	------------

BECKY	2004/03/05
-------	------------

--	--

CHK	DATE