

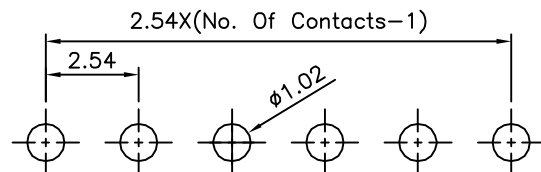
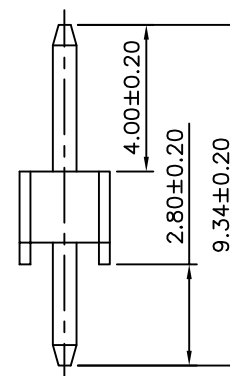


△ SPECIFICATION

Current: 3A
 Withstanding Voltage: 1000V AC RMS
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operating Temperature: -55°C~+105°C
 Housing: PBT(UL94V-0), Black
 Contact: Copper Alloys, Gold Flash Over Nickel
 No. Of Contacts: 2~40 Contacts
 RoHS Compliant

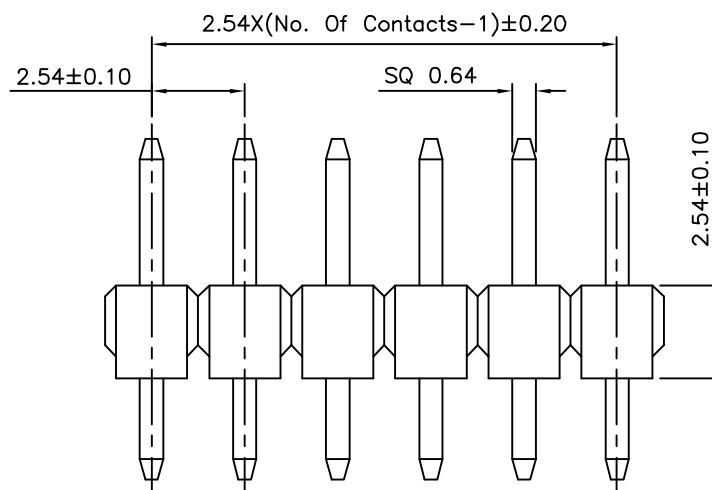

Recommended P.C.B. Layout

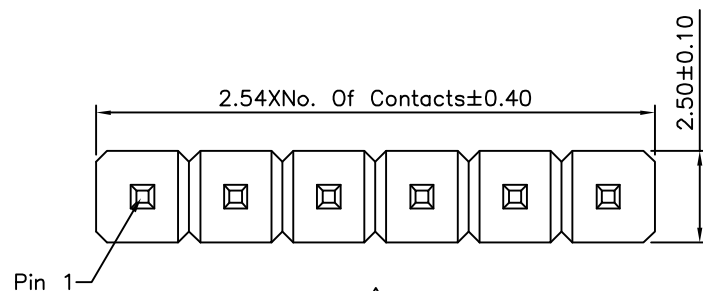

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

02099

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

SCALE

NONE

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE


.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	12/21/2011
△ A1		Modify Part No.	INGRID	12/13/2007
△ A0		NEW RELEASE	SHIN	01/23/2007