
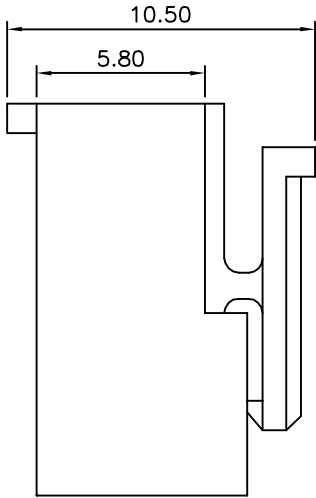
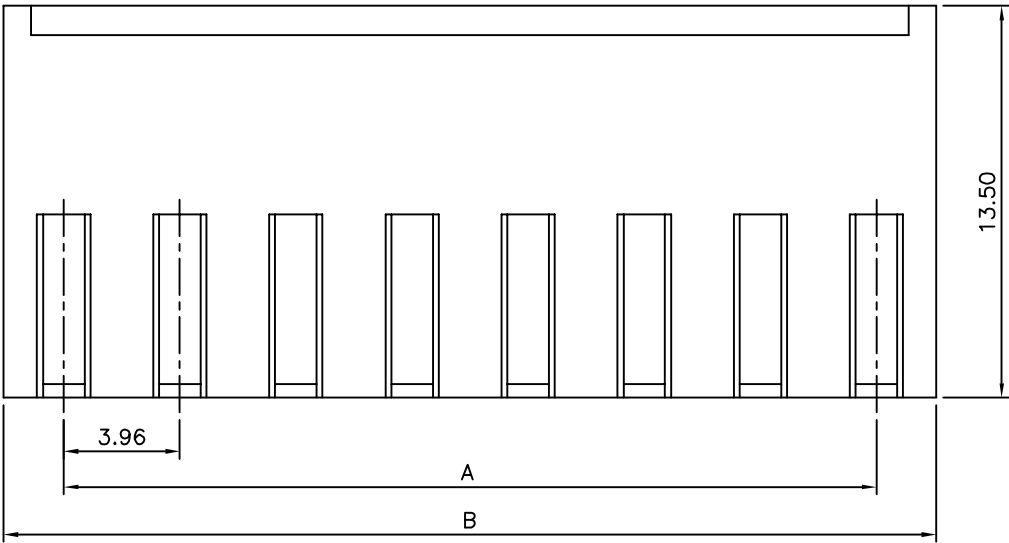


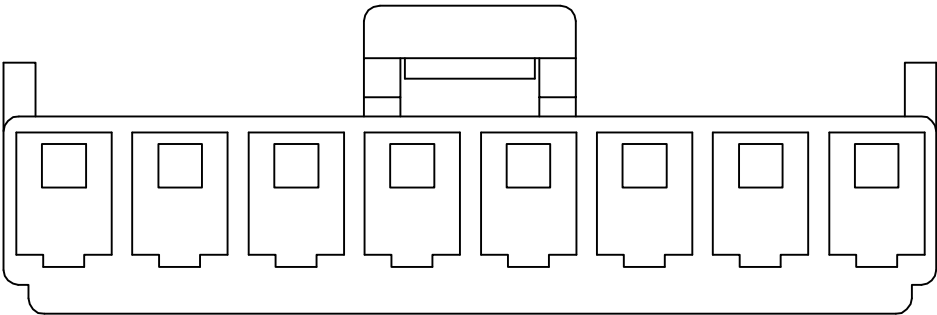

Pin	A	B
02	3.96	8.04
03	7.92	12.10
04	11.88	15.96
05	15.84	20.00
06	19.80	23.90
07	23.76	27.90
08	27.72	31.86
09	31.68	35.88
10	35.64	39.84
11	39.60	43.74
12	43.56	47.74
13	47.52	51.70
14	51.48	55.66

△△ SPECIFICATION
Current Rating: 5A AC/DC
Voltage Rating: 250V AC Max.
Operating Temperature: -25°C~+85°C
Insulation Resistance: 1000 Megaohms Min.
Insulator: PA66(UL94V-0)
RoHS Compliant