
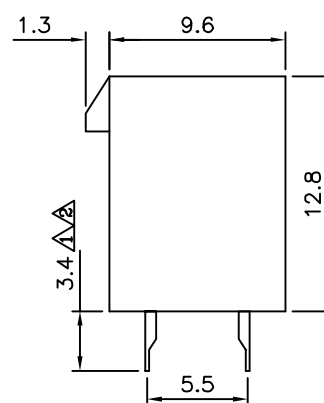
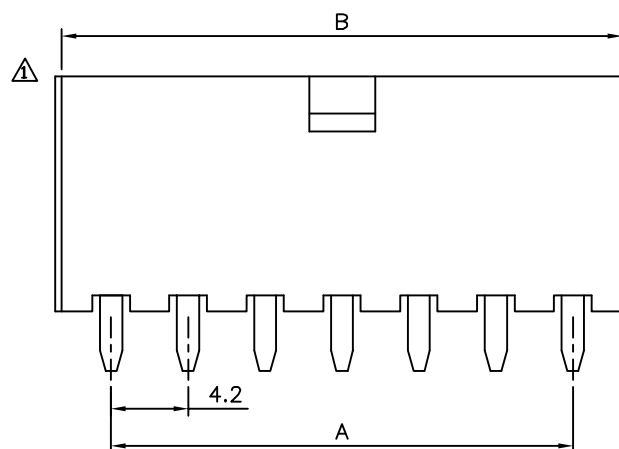
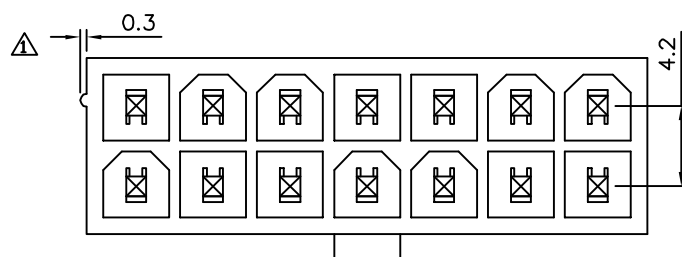


△ SPECIFICATION

Current Rating:7A AC/DC
Voltage Rating:250V AC/DC
Withstand Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+85°C
Insulator:PA66(UL94V-2)
△ Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

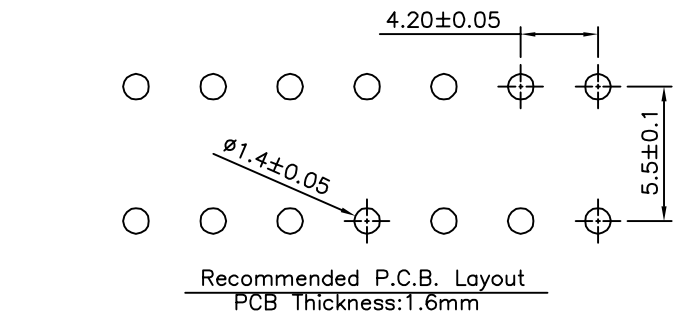

△

Pin	A	B
02	—	5.2
04	4.20	9.4
06	8.40	13.6
08	12.60	17.8
10	16.80	22.0
12	21.00	26.2
14	25.20	30.4
16	29.40	34.6
18	33.60	38.8
20	37.80	43.0
22	42.00	47.2
24	46.20	51.4

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02253

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


GAO

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.38
.XX ±0.25
ANG.

UNIT
mm



NO.

REV.

A2

NO.

REV.

NO.

REV.

A2

NO.

REV.

Modify Data	HZF	08/02/2013
Modify Data	HZF	10/20/2009
NEW RELEASE		
REVISIONS	CHK	DATE