

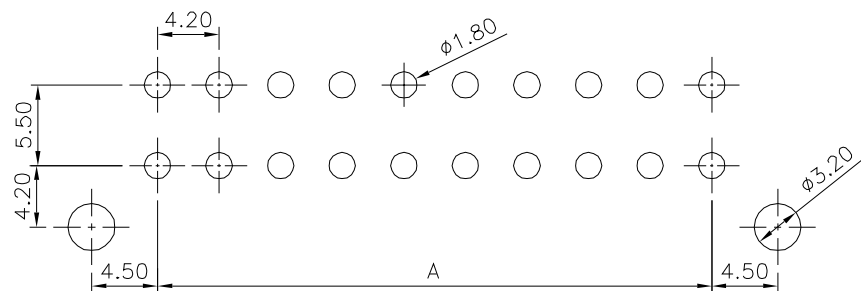
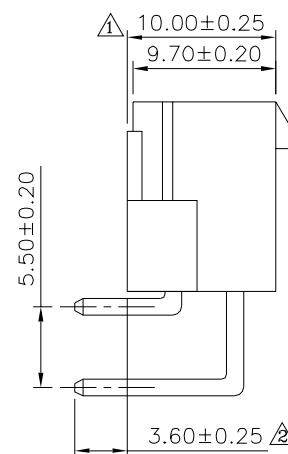


SPECIFICATION

- Current Rating:7A AC,DC
- Voltage Rating:600V AC,DC
- Withstanding Voltage:1500V AC/Minute
- Insulation Resistance:1000 Megaohms Min.
- Contact Resistance:20 Milliohms Max.
- Temperature Range:-25°C~+85°C
- Insulator:PA66,UL94V-2,Nature
- Contact:Brass,Tin Plated
- RoHS Compliant

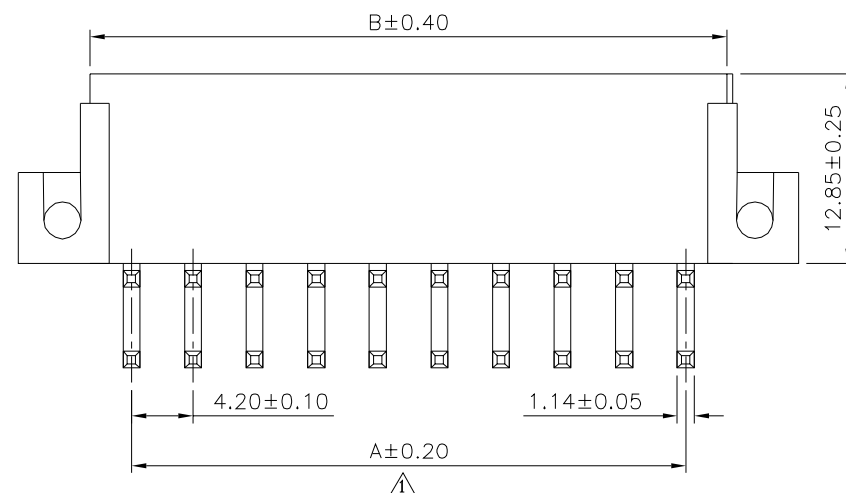

Recommended P.C.B. Layout

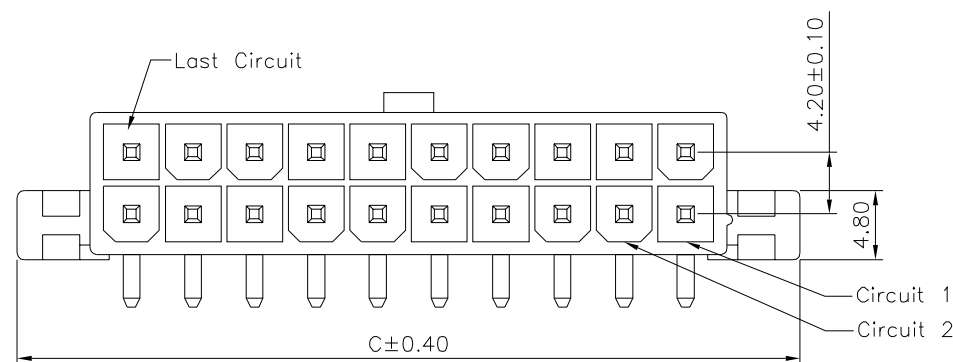

Pin	A	B	C
02	--	5.60	15.20
04	4.20	9.80	19.40
06	8.40	14.00	23.60
08	12.60	18.20	27.80
10	16.80	22.40	32.00
12	21.00	26.60	36.20
14	25.20	30.80	40.40
16	29.40	35.00	44.60
18	33.60	39.20	48.80
20	37.80	43.40	53.00
22	42.00	47.60	57.20
24	46.20	51.80	61.40

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 02266

02266

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.


A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ± 0.30
X ± 0.25
XX ± 0.20
XXX ± 0.05
ANG. $\pm 1^\circ$


UNIT mm




	A2	Modify Data	HZF	01/11/2019
	A1	Modify Data	HZF	11/10/2014
	A0	NEW RELEASE	HZF	05/17/2011
NO	REV	REVISIONS	CHK	DATE

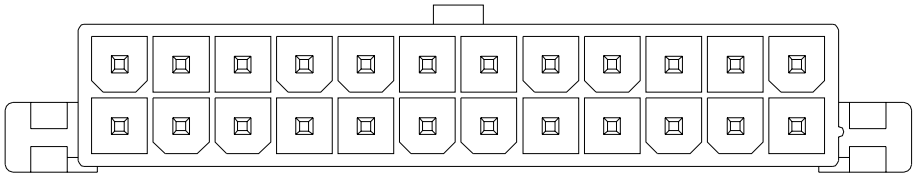


2X12P

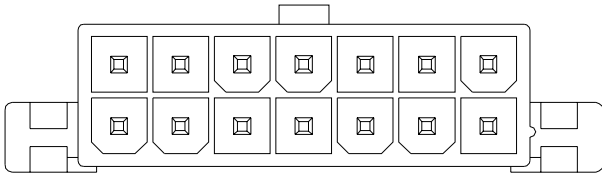


2X07P

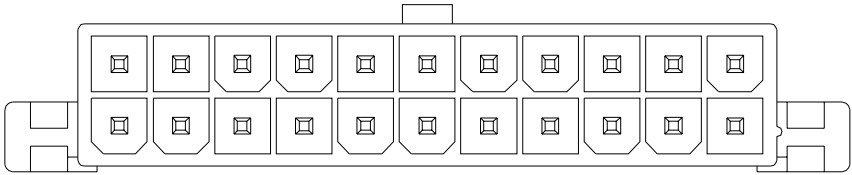


2X11P

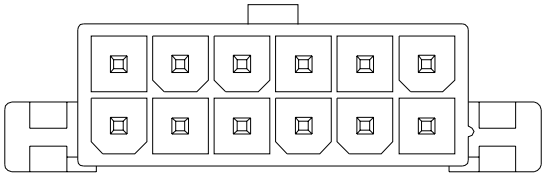


2X06P

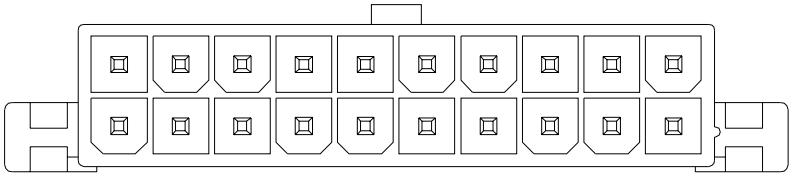


2X10P

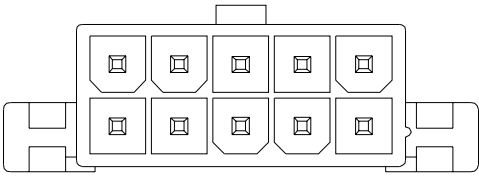


2X05P

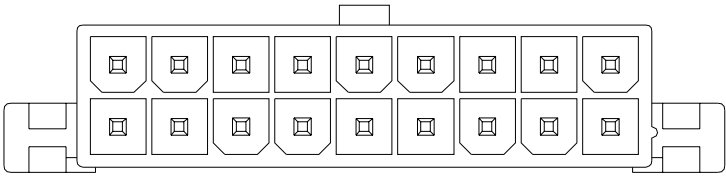


2X09P

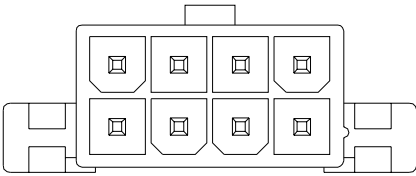


2X04P




2X02P

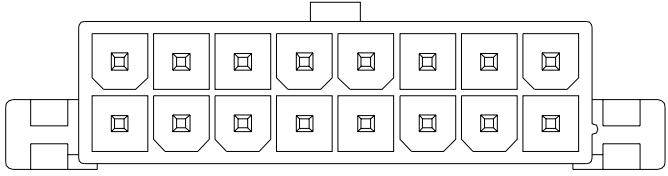

2X08P

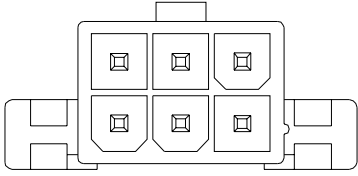

2X03P



2X01P