
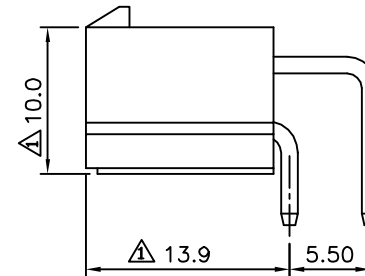
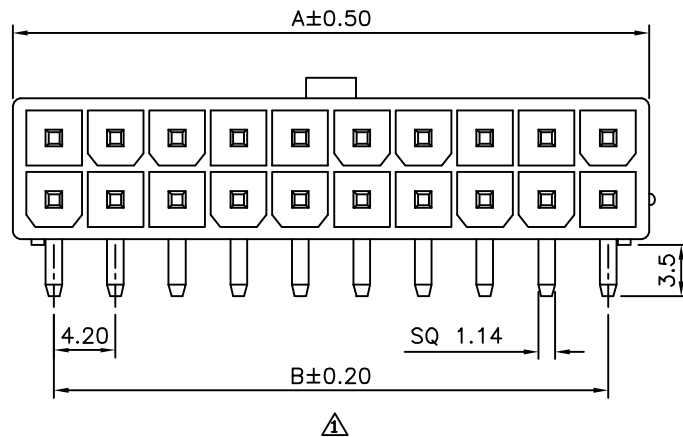


Recommended P.C.B. Layout(Top View)

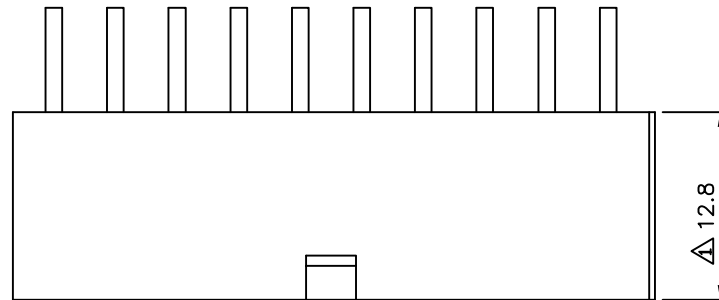

### SPECIFICATION

Current Rating:7.0 Amp Max.

Dielectric Withstand Voltage:

1000V AC RMS For 60 Seconds

Insulation Resistance:1000 Megaohms Min.

At 1000V DC

Operation Temperature:-25°C~+85°C

Housing:PA66(UL94V-2)

Terminal:Brass,Tin Plated Over Nickel  
RoHS Compliant

| Pin | A     | B     |
|-----|-------|-------|
| 02  | 5.60  | —     |
| 04  | 9.80  | 4.20  |
| 06  | 14.00 | 8.40  |
| 08  | 18.20 | 12.60 |
| 10  | 22.40 | 16.80 |
| 12  | 26.60 | 21.00 |
| 14  | 30.80 | 25.20 |
| 16  | 35.00 | 29.40 |
| 18  | 39.20 | 33.60 |
| 20  | 43.40 | 37.80 |
| 22  | 47.60 | 42.00 |
| 24  | 51.80 | 46.20 |

DRAWING No.

02278

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

.X ±0.30  
.XX ±0.20  
.XXX ±0.10

SCALE

NONE

REV.

A2


UNIT  
mm




| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| A2  |      | Modify Data | HZF | 07/10/2012 |
| A1  |      | Modify Data | HZF | 02/22/2010 |
| A0  |      | NEW RELEASE | HZF |            |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.


|   |   |   |   |   |   |   |   |          |     |           |
|---|---|---|---|---|---|---|---|----------|-----|-----------|
|   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8        | 9   | 0         |
|   |   |   |   |   |   |   |   | File No. | 272 | SHEET 2/2 |
| J |   |   |   |   |   |   |   |          |     |           |
| I |   |   |   |   |   |   |   |          |     |           |
| H |   |   |   |   |   |   |   |          |     |           |
| G |   |   |   |   |   |   |   |          |     |           |
| F |   |   |   |   |   |   |   |          |     |           |
| E |   |   |   |   |   |   |   |          |     |           |
| D |   |   |   |   |   |   |   |          |     |           |
| C |   |   |   |   |   |   |   |          |     |           |
| B |   |   |   |   |   |   |   |          |     |           |
| A |   |   |   |   |   |   |   |          |     |           |

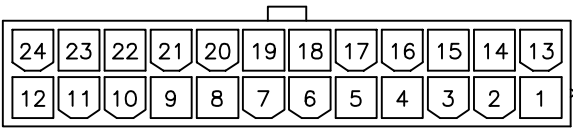


2X12P

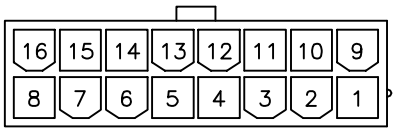


2X8P




2X4P

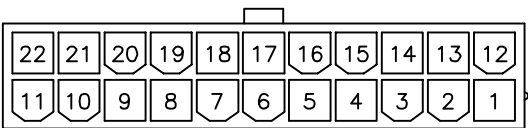


2X11P




2X7P




2X3P

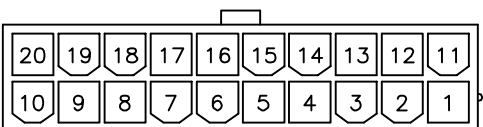


2X10P




2X6P




2X2P

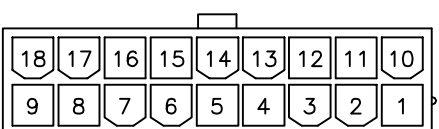

2X9P



2X5P



2X1P

**4UCON**元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

02278

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


SONG

REV.

A2

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X ±0.38  
.XX ±0.25  
ANG.

UNIT  
mm



A2

Modify Data

HZF

07/10/2012



A1

Modify Data

HZF

02/22/2010



A0

NEW RELEASE

HZF

NO. REV.

REVISIONS

CHK

DATE