
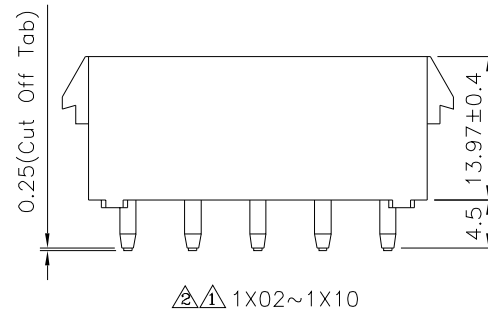



SPECIFICATION

Current Rating:13A(2~4P),11A(6~15P)
Voltage Rating:600V
Dielectric Withstanding Voltage:5000V AC/Minute
Ambient Temperature Rise:-55°C~+105°C
⚠ Insulator:PA66 (UL94V-2),Nature
Contact:Phosphor Bronze,Tin Plated
RoHS Compliant

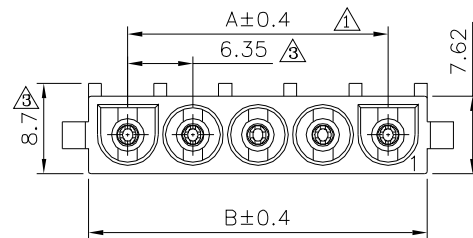

Pin	A	B
02	6.35	13.97
03	12.70	20.32
04	19.05	26.67
05	25.40	33.02
06	31.75	39.37
07	38.10	45.72
08	44.45	52.07
09	50.80	58.42
10	57.15	64.77

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No. 20

02285

APPROVED BY	MEI
-------------	-----














CHECKED BY

DRAWING BY

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
.X	± 0.4
.XX	± 0.25
.XXX	± 0.08

UNIT mm	
------------	---

3	B3	Modify Data	HZF	05/30/2021
2	B2	Modify Data	HZF	10/24/2016
1	B1	Modify Data	HZF	05/16/2013
0	B0	Modify Data	HZF	12/01/2009
0	B0	NEW RELEASE	HZF	12/01/2009
NO. REV.	REVISIONS		CHK	DATE

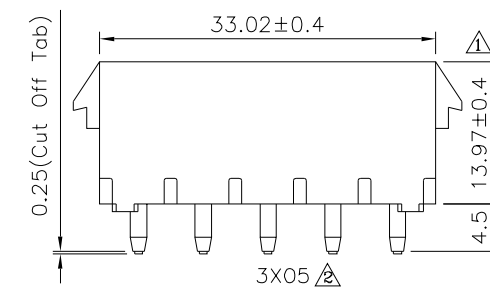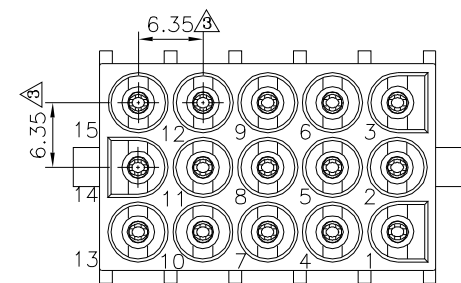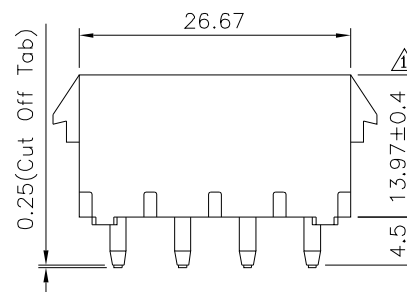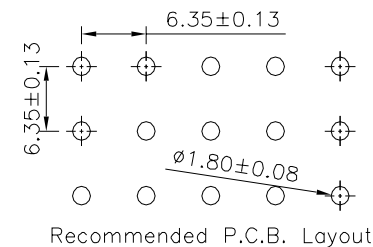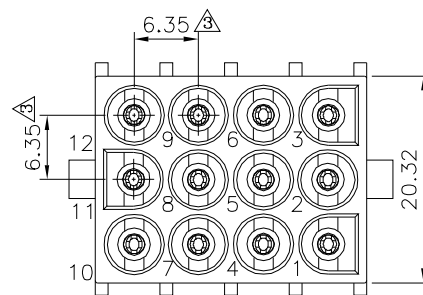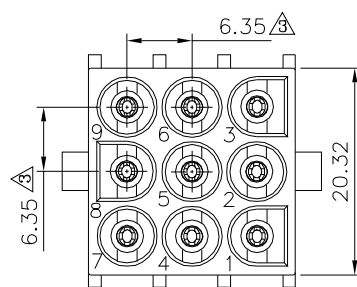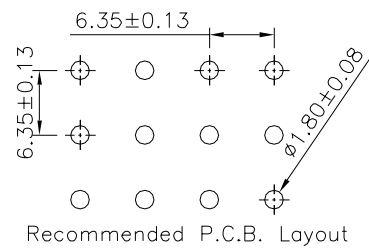

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 02285

02285

SCALE

NONE

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.4
.XX ±0.25
.XXX ±0.08

UNIT
mm



NO. REV.

B3

Modify Data

B2

Modify Data

B1

Modify Data

B0

Modify Data

B0

NEW RELEASE

REVISIONS

CHK

DATE

HZF

05/30/2021

HZF

10/24/2016

HZF

05/16/2013

HZF

12/01/2009

HZF

12/01/2009