

# △△ SPECIFICATION

## △ 1.General Characteristics

3.0mm Micro-Fit Receptacle Housing 2XXX  
Black Insulator

## △ 2.Material&Finish

△ Housing:PA66(UL94V-0),Black


## △ 3.Electrical Characteristics

Current Rating:3A AC/DC  
Voltage Rating:250V AC/DC  
Insulation Resistance:1000 Megaohms Min.  
Withstand Voltage:1500V AC/Minute


## △ 4.Environmental Characteristics

Temperature Range:-25°C~+85°C


## △ 5.RoHS Compliant




△△




△△

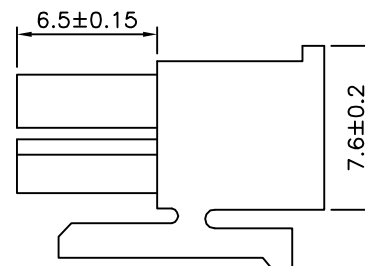

△ 02~04 Pin

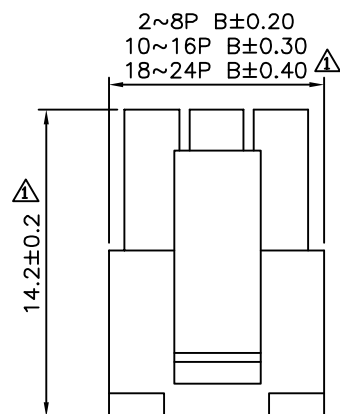

△

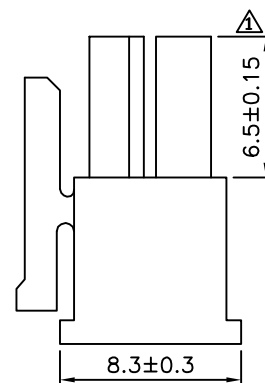

△ 06~24 Pin

△

| Pin | A    | B     |
|-----|------|-------|
| 02  | --   | 3.85  |
| 04  | 3.0  | 6.85  |
| 06  | 6.0  | 9.85  |
| 08  | 9.0  | 12.85 |
| 10  | 12.0 | 15.85 |
| 12  | 15.0 | 18.85 |
| 14  | 18.0 | 21.85 |
| 16  | 21.0 | 24.95 |
| 18  | 24.0 | 27.95 |
| 20  | 27.0 | 30.95 |
| 22  | 30.0 | 33.95 |
| 24  | 33.0 | 36.95 |

4UCON

元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

02599

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG


REV.

A3

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

△ X. ±0.5  
△ X ±0.25  
△ .XX ±0.2  
△ .XXX ±0.08

UNIT  
mm



△ A3

Modify Data

HZF

09/16/2014

△ A2

Modify Data

HZF

05/20/2013

△ A1

Modify Data

HZF

11/30/2009

△ A0

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE