




Recommended P.C.B. Layout(26,44,62 Pin)

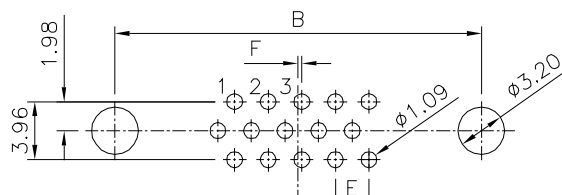



Recommended P.C.B. Layout(15 Pin)

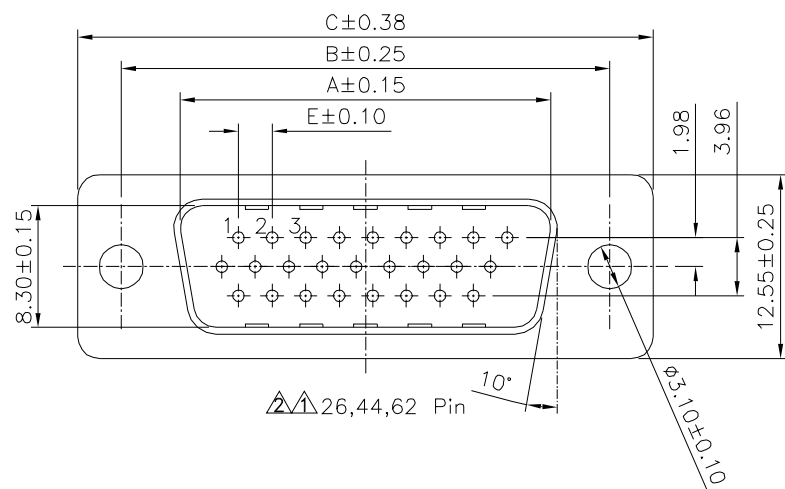

26,44,62 Pin

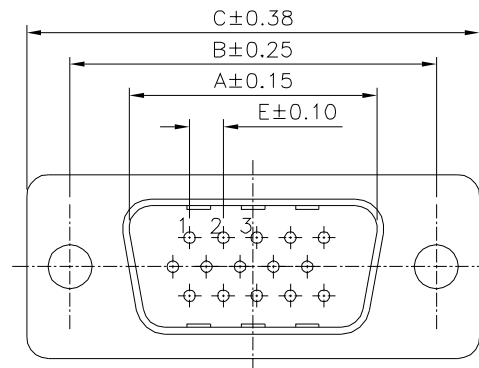

15 Pin

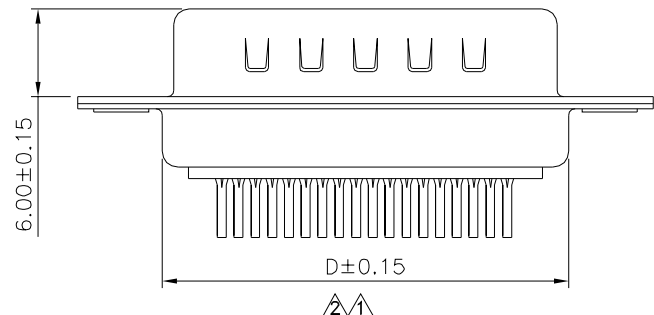

SPECIFICATION

Current Rating:1A
Withstand Voltage:500V For 1 Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
At 500V DC
Operation Temperature:-55°C~+105°C
Insulator:PBT(UL94V-0),White
Contact:Brass,Gold Flash Over Nickel
Shell:Steel,Front:Nickel Plated,Rear:Tin Plated
RoHS Compliant

Position	A	B	C	D	E	F
15	16.92	24.99	30.81	19.20	2.29	0.25
26	25.25	33.32	39.20	27.70	2.29	0.50
44	38.96	47.04	53.04	41.10	2.29	0.50
62	55.42	63.50	69.40	57.30	2.41	0.60

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 02697

02697

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.25 .X* ±3*
.XX ±0.25 .XX* ±1*
.XXX ±0.05 .XXX* ±0.5*

UNIT
mm



NO.

REV.

A4

A3

A2

A1

A0

Modify Data	HZF	01/05/2026
Modify Data	HZF	03/08/2023
Modify Data	HZF	05/18/2019
Modify Data	HZF	03/02/2011
NEW RELEASE	HZF	03/03/2009
REVISIONS	CHK	DATE