



△ SPECIFICATION

Current Rating:3 Amp
Withstand Voltage:500V For 1 Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min.
At 500V DC
Temperature Range:-40°C~+105°C
Insulator:PBT+30%G.F.(UL94V-0)
Contact:Brass,Gold Plated Over Nickel
RoHS Compliant

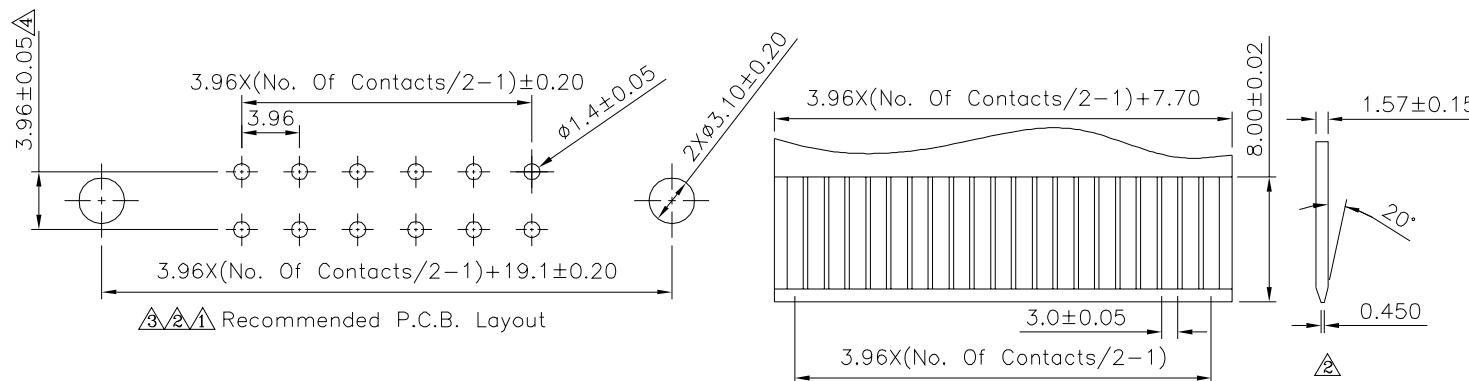


△△△ Recommended P.C.B. Layout


△△△ Daughter Card Layout

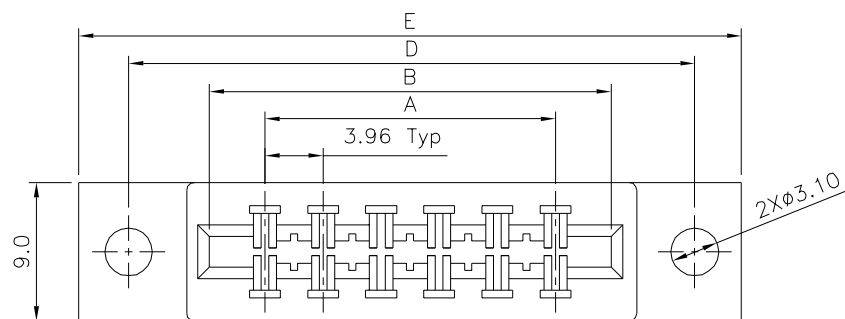

△

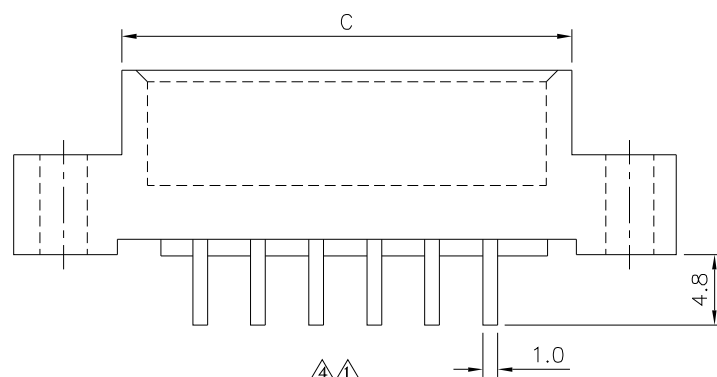

△△

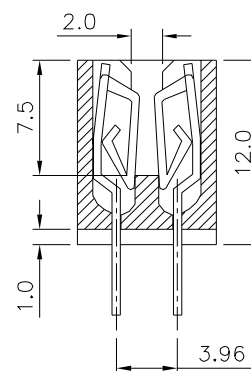

△△△

Pin	A	B	C	D	E
*10	15.84	24.06	27.40	34.94	41.24
*12	19.80	28.02	31.36	38.90	45.20
*16	27.72	35.94	39.28	46.82	53.12
*20	35.64	43.86	47.20	54.74	61.04
22	39.60	47.82	51.16	58.70	65.00
*24	43.56	51.78	55.12	62.66	68.96
28	51.48	59.70	63.04	70.58	76.88
*30	55.44	63.66	67.00	74.54	80.84
32	59.40	67.62	70.96	78.50	84.80
*36	67.32	75.54	78.88	86.42	92.72
*40	75.24	83.46	86.80	94.34	100.64
*44	83.16	91.38	94.72	102.26	108.56
46	87.12	95.34	98.68	106.22	112.52
*48	91.08	99.30	102.64	110.18	116.48
*50	95.04	103.26	106.60	114.14	120.44
*56	106.92	115.14	118.48	126.02	132.32
*60	114.84	123.06	126.40	133.94	140.24
*62	118.80	127.02	130.36	137.90	144.20
64	122.76	130.98	134.32	141.86	148.16
70	134.64	142.86	146.20	153.74	160.04
*72	138.60	146.82	150.16	157.70	164.00
*86	166.32	174.54	177.88	185.49	191.48

△ The Mark Of "*" Are Toolled Already

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

02764

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


0~10 ±0.2 100~300 ±0.5

10~30 ±0.3 300~ ±0.6

30~100 ±0.4 △ ANG. ±0.5

UNIT

mm



△ A4

Modify Data

HZF

04/12/2019

△ A3

Modify Data

HZF

11/22/2017

△ A2

Modify Data

HZF

08/16/2013

△ A1

Modify Data

HZF

10/20/2010

△ A0

NEW RELEASE

BECKY

03/27/2006

NO. REV.

REVISIONS

CHK

DATE