
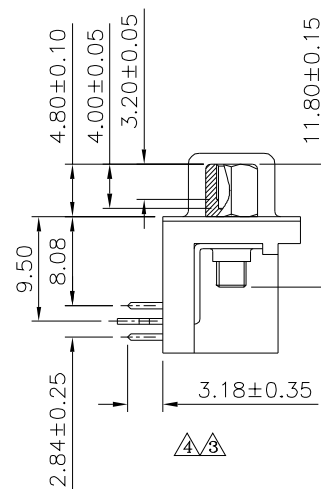
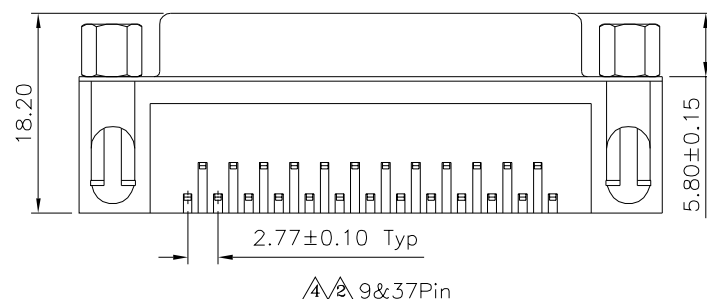
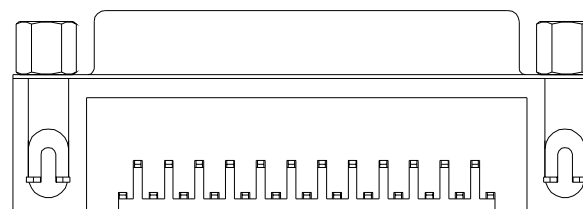


SPECIFICATION

Current Rating:1 Amps
 Voltage Rating:250V AC
 Withstanding Voltage:500V(One Minute)
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 At 500V DC
 Operating Temperature:−55°C~+105°C
 Shell:Steel,Nickel Plated
 Insulator:PBT+30%G.F.(UL94V−0),Black
 Contact:Brass
 Gold Flash On Contact Area
 Tin Plated On Solder Tails,Over Nickel
 Z Flake:Steel,Tin Plated
 Screw:Steel,Nickel Plated
 RoHS Compliant

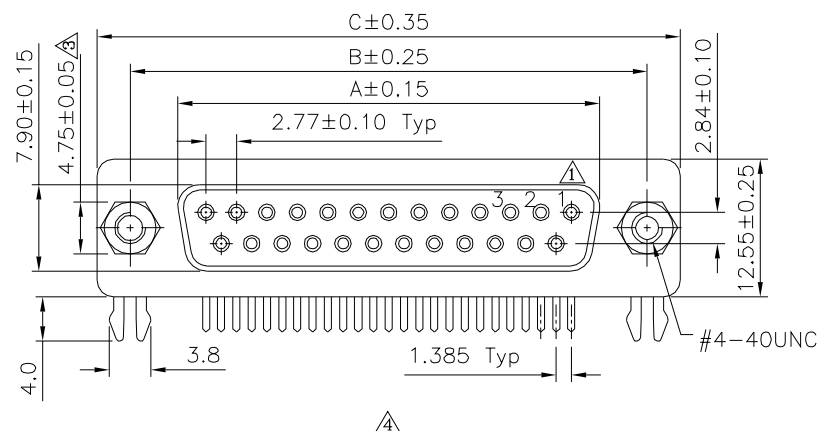

Pin	A	B	C
09	16.33	24.99	30.81
15	24.80	33.32	39.20
25	38.38	47.04	53.04
37	54.84	63.50	69.40

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

02797

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

C4

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38 .X* ±3*
 .XX ±0.25 .XX* ±1*
 .XXX ±0.05 .XXX* ±0.5*

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

08/10/2021

07/22/2015

12/27/2013

08/12/2013

05/24/2013