

SPECIFICATIONS

Current Rating:5 AMP

Dielectric Withstanding Voltage:

1000V Per Minute

Insulation Resistance:1000 Megohms Min.

At 500V DC

Contact Resistance:15 Milliohms Max.10 SES.

Operating Temperature:-55°C ~+105°C





Insulator:PBT+30% Glass Fiber

UL 94V-0

Contact:Brass Or Phosphor Bronze

Tin Plated

shell:Steel Nickel Plated

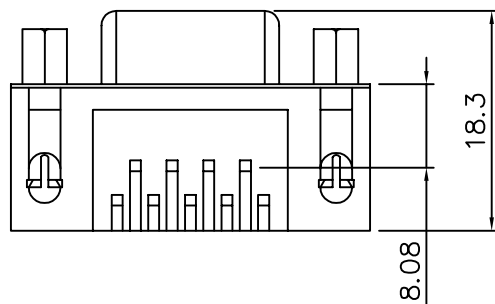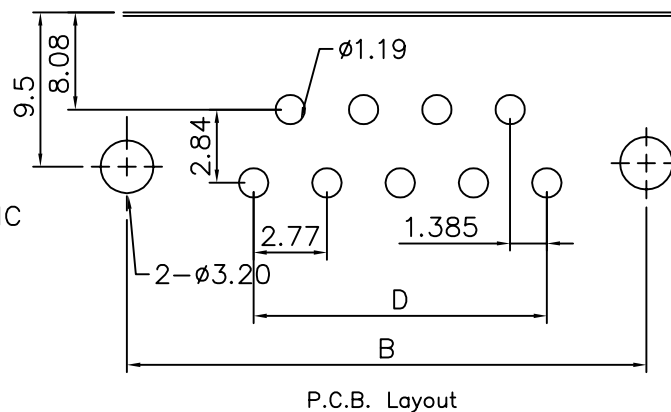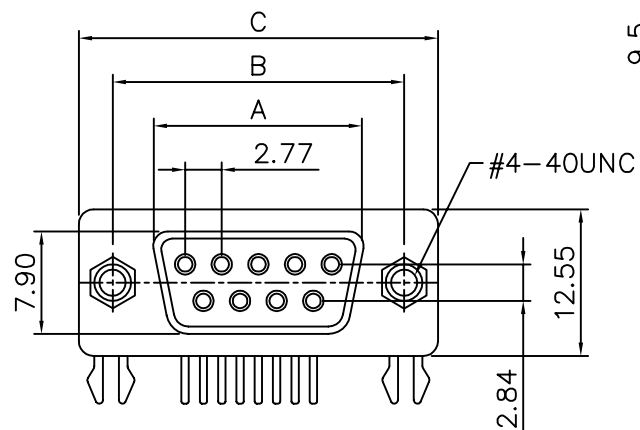

Pin	A±0.20	B±0.25	C±0.38	D
09	16.33	24.99	30.80	11.08
15	24.66	33.32	39.10	19.39
25	38.38	47.04	53.00	33.24
37	54.84	63.50	69.32	49.86

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02812

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.25

.XX ±0.15

.XXX ±0.05

UNIT
mm



SCALE

NONE

REV.

A

AREA

REVISIONS

CHK

DATE