

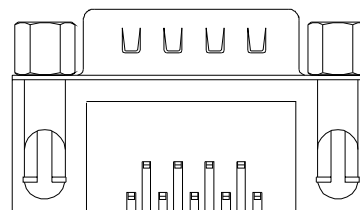
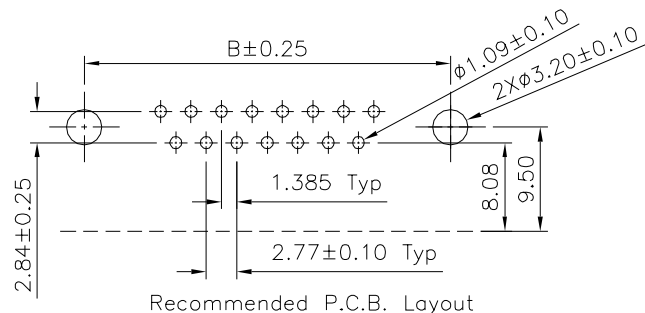


SPECIFICATION


Current Rating:1A
 Voltage Rating:250V AC
 Withstanding Voltage:500V(One Minute)
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 At 500V DC
 Operating Temperature:-55°C~+105°C
 Shell:Steel,Nickel Plated
 Insulator:PBT+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash On Contact Area,
 Tin Plated On Solder Tails,Over Nickel
 Z Flake:Steel,Tin Plated
 Screw:Steel,Nickel Plated
 RoHS Compliant

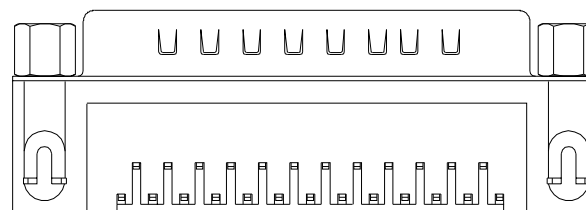


9&37Pin

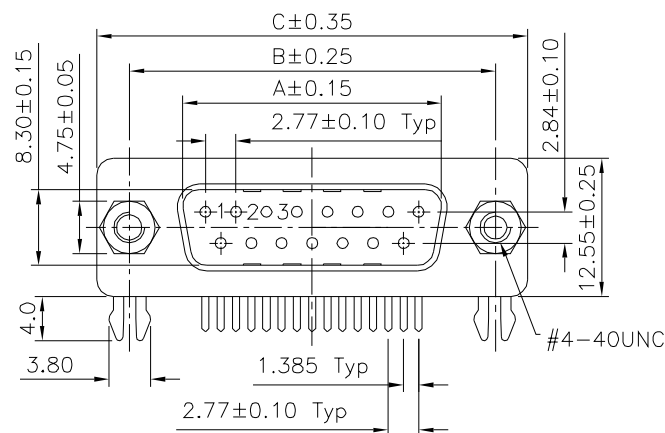

25Pin

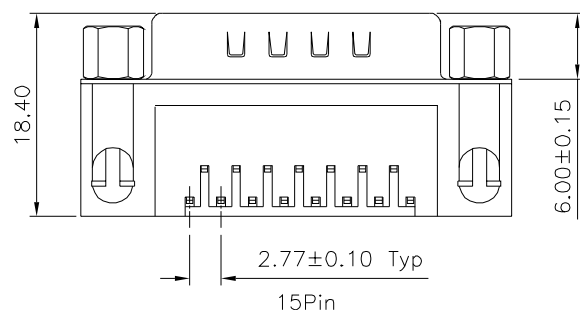

15Pin

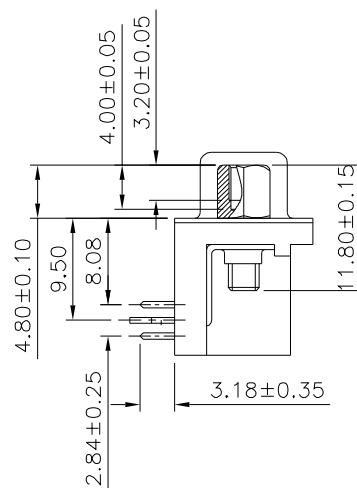

Pin	A	B	C
09	16.92	24.99	30.81
15	25.25	33.32	39.20
25	38.96	47.04	53.04
37	55.42	63.50	69.40

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

02828

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SONG

REV.

C1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE Δ

.X ± 0.38 .X* $\pm 3^{\circ}$
 .XX ± 0.25 .XX* $\pm 1^{\circ}$
 .XXX ± 0.10 .XXX* $\pm 0.5^{\circ}$

UNIT
 mm



Δ C1

Modify Data

HZF

03/12/2025

Δ C0

NEW RELEASE

HZF

05/25/2022

NO. REV.

REVISIONS

CHK

DATE