

SPECIFICATIONS:

Contact Current Rating:1 Ampere

Dielectric Withstanding Voltage: AC 500V R.M.S.

Insulation Resistance : 500Megohms Min. At DC 500V





Contact Resistance:30Milliohms. Max.

Operating Temperature:-55°C ~ +105°C



Contact:Brass , Gold Flashed

Insulator:P.B.T.UL94V-0 Rated

Shell:Cold Rolled Steel,Nickel ,Tin,Zinc Plated

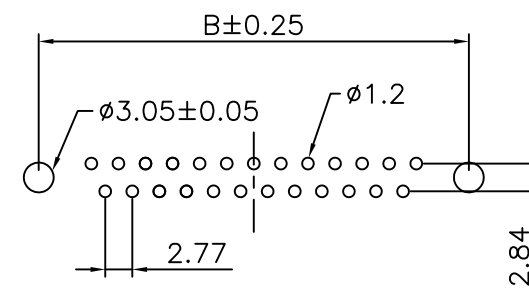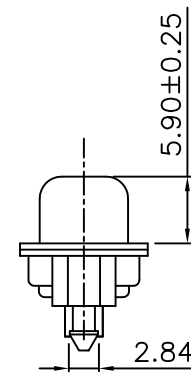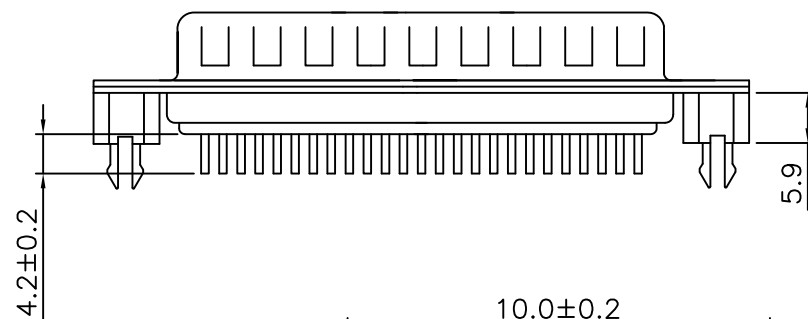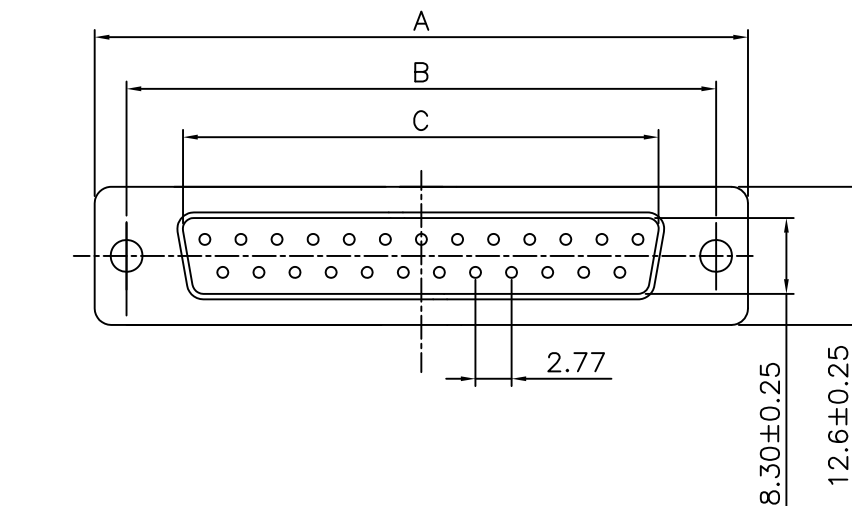

Recommended P.C.B. Layout

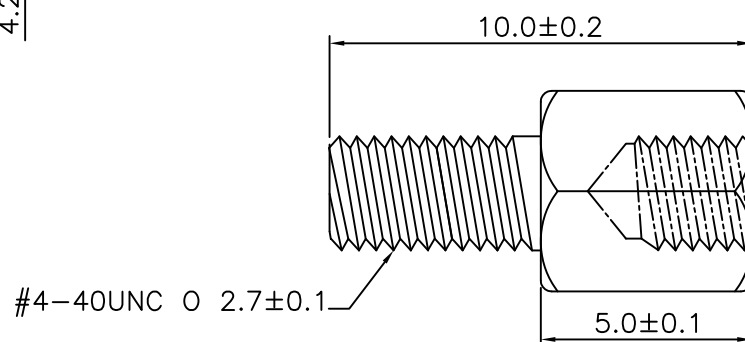

Circuits	A±0.25	B±0.25	C±0.25
09	30.80	25.00	16.92
15	39.20	33.32	25.25
19	44.80	38.86	30.60
23	50.30	44.30	36.10
25	53.05	47.04	38.96
37	69.40	63.50	55.42

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02891

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

TCF

REV.

A0

UNLESS OTHERWISE
SPECIFIED

TOLERANCES ARE


.X ±0.38

.XX ±0.25

ANG.

UNIT

mm



NO.

REV.

A0

NEW RELEASE

REVISIONS

CHK

DATE