
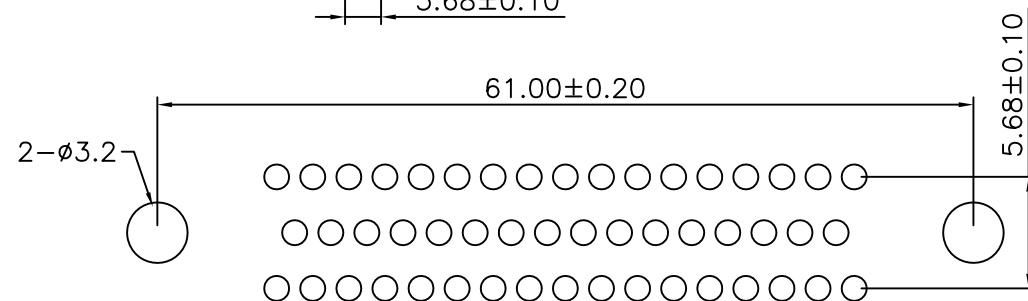

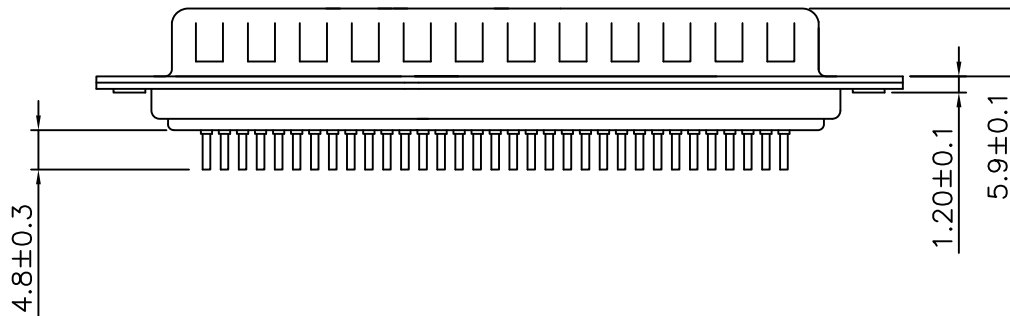


SPECIFICATIONS:

Contact Current Rating: 1 Amp
 Dielectric Withstanding Voltage: AC 500V R.M.S.
 Insulation Resistance : 500 Megohms Min. at DC 500V
 Contact Resistance: 30 Milliohms Max.
 Operating Temperature: -55°C ~ +105°C
 Contact: Brass, Gold Flashed 1u", 3u", 5u", 10u", 15u", 30u"
 Insulator: P.B.T. UL94V-0 Rated
 Shell: Cold Rolled Steel, Nickel, Tin or Gold Plated

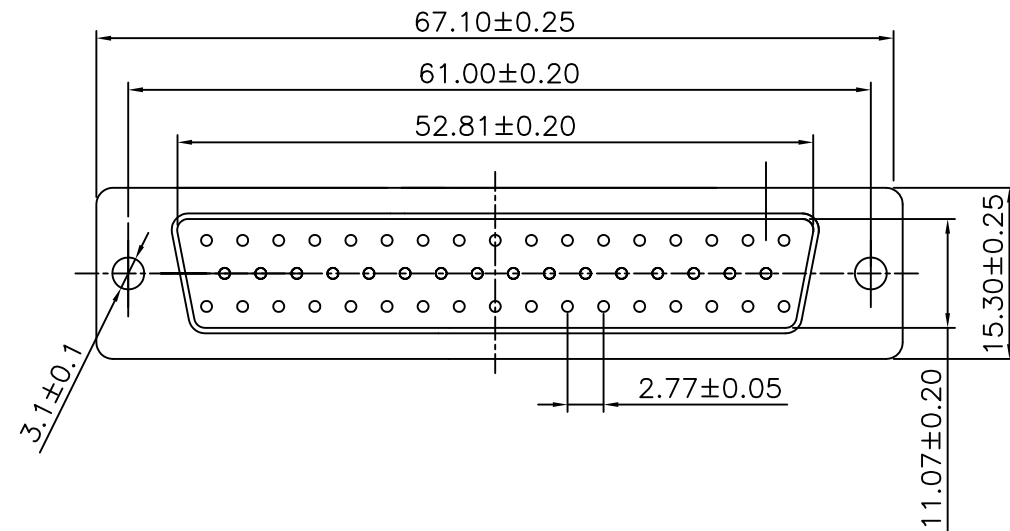

PCB Layout

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

02893

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

TCF

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG.

UNIT

MM



NO. REV.

NEW RELEASE

REVISIONS

CHK

DATE