



SPECIFICATION


Current Rating:1A Max.
 Dielectric Withstanding Voltage:500V AC
 For 1 Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 At DC 500V
 Temperature Range:-55°C~+105°C
 Housing:PBT(UL94V-0),White
 Contact:Brass,Gold Flash Over All,Over Nickel
 Front Shell:Cold Rolled Steel,Nickel Plated
 Over Copper
 Back Shell:Cold Rolled Steel,Tin Plated Over
 Copper
 RoHS Compliant

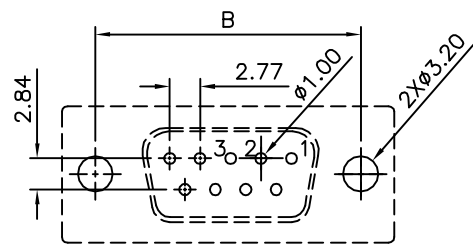


Recommended P.C.B. Layout

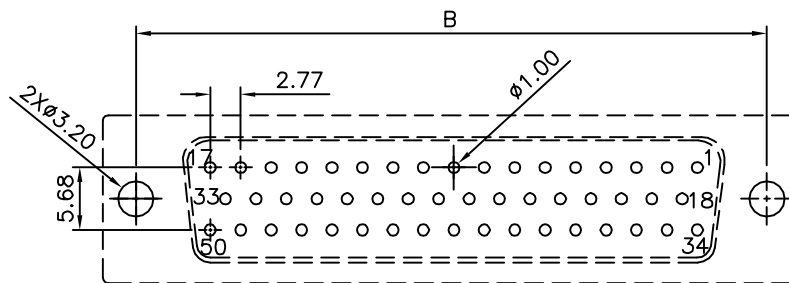





Recommended P.C.B. Layout

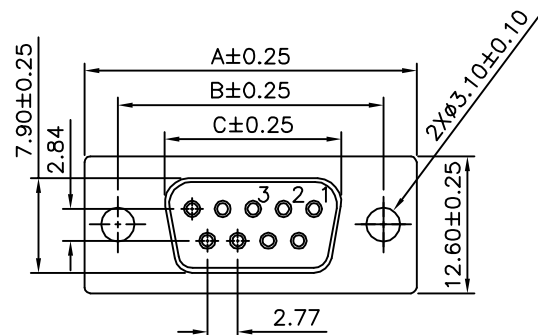

09,15,25,37P

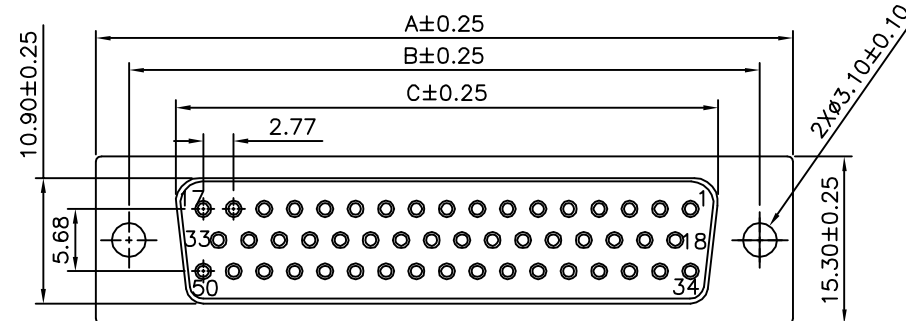

50P

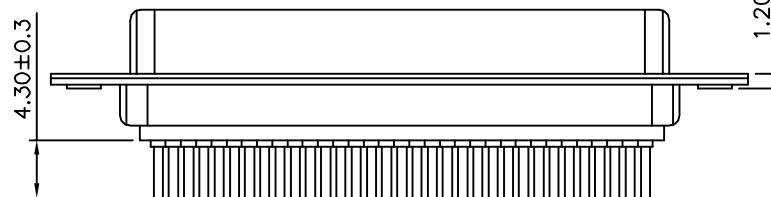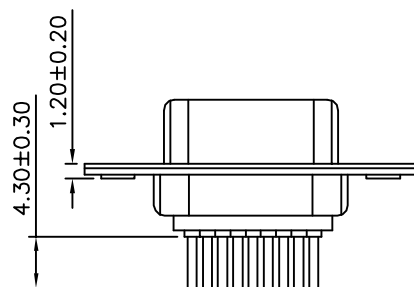

Pin	A	B	C
09	30.80	25.00	16.30
15	39.20	33.32	24.70
25	53.05	47.04	38.40
37	69.40	63.50	54.80
50	67.10	61.00	52.20

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

02913

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SONG

REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10
 ANG. ±1°

UNIT mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

03/19/2012

DATE