

ELECTRICAL CHARACTERISTICS:





Contact Current Rating: 1 Amperes.
 Dielectric Withstanding Voltage: AC 500V R.M.S.
 Insulation Resistance: 500 Megohms Minimum At DC 500V
 Contact Resistance: 30 Milliohms Maximum.
 Operating Temperature: -55°C To 105°C.

MATERIALS:

Contact: Brass.
 Insulator: P.B.T. UL 94-V0 Rated.
 Shell: Gold Rolled Steel.

FINISHES:

Contacts: Gold Flashed.
 Shell: Nickel, Tin, Zinc Plated.

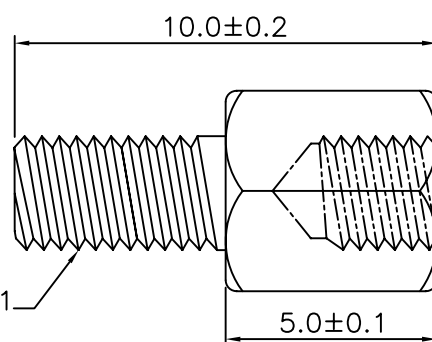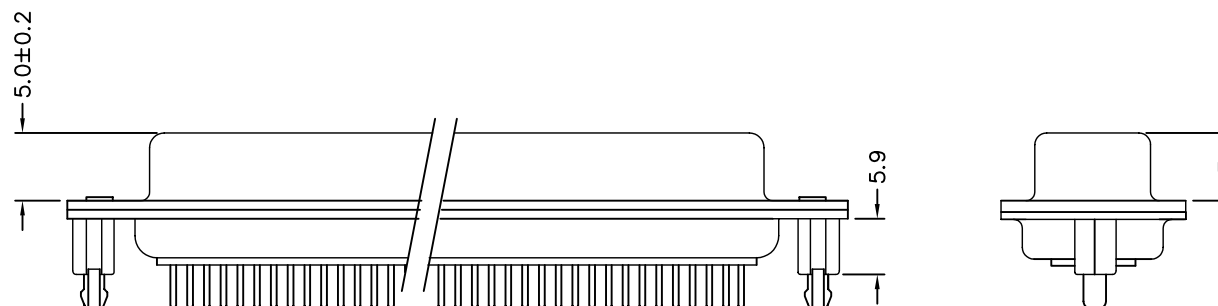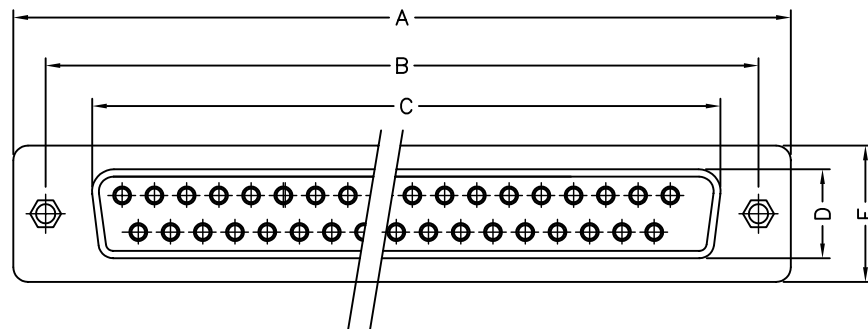

#4-40UNC O 2.7±0.1

Part No.	A±0.25	B±0.25	C±0.25	D±0.25	E±0.25	F±0.25
09S	30.80	25.00	16.30	7.90	12.60	5.90
15S	39.20	33.32	24.70	7.90	12.60	5.90
19S	44.80	38.86	30.00	7.90	12.60	5.90
23S	50.30	44.30	35.50	7.90	12.60	5.90
25S	53.05	47.04	38.40	7.90	12.60	5.90
37S	69.40	63.50	54.80	7.90	12.60	5.90

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

02938

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG.

SCALE

NONE

REV.

A0

UNIT
 mm



NO. REV.

NEW RELEASE

REVISIONS

BECKY

DATE