


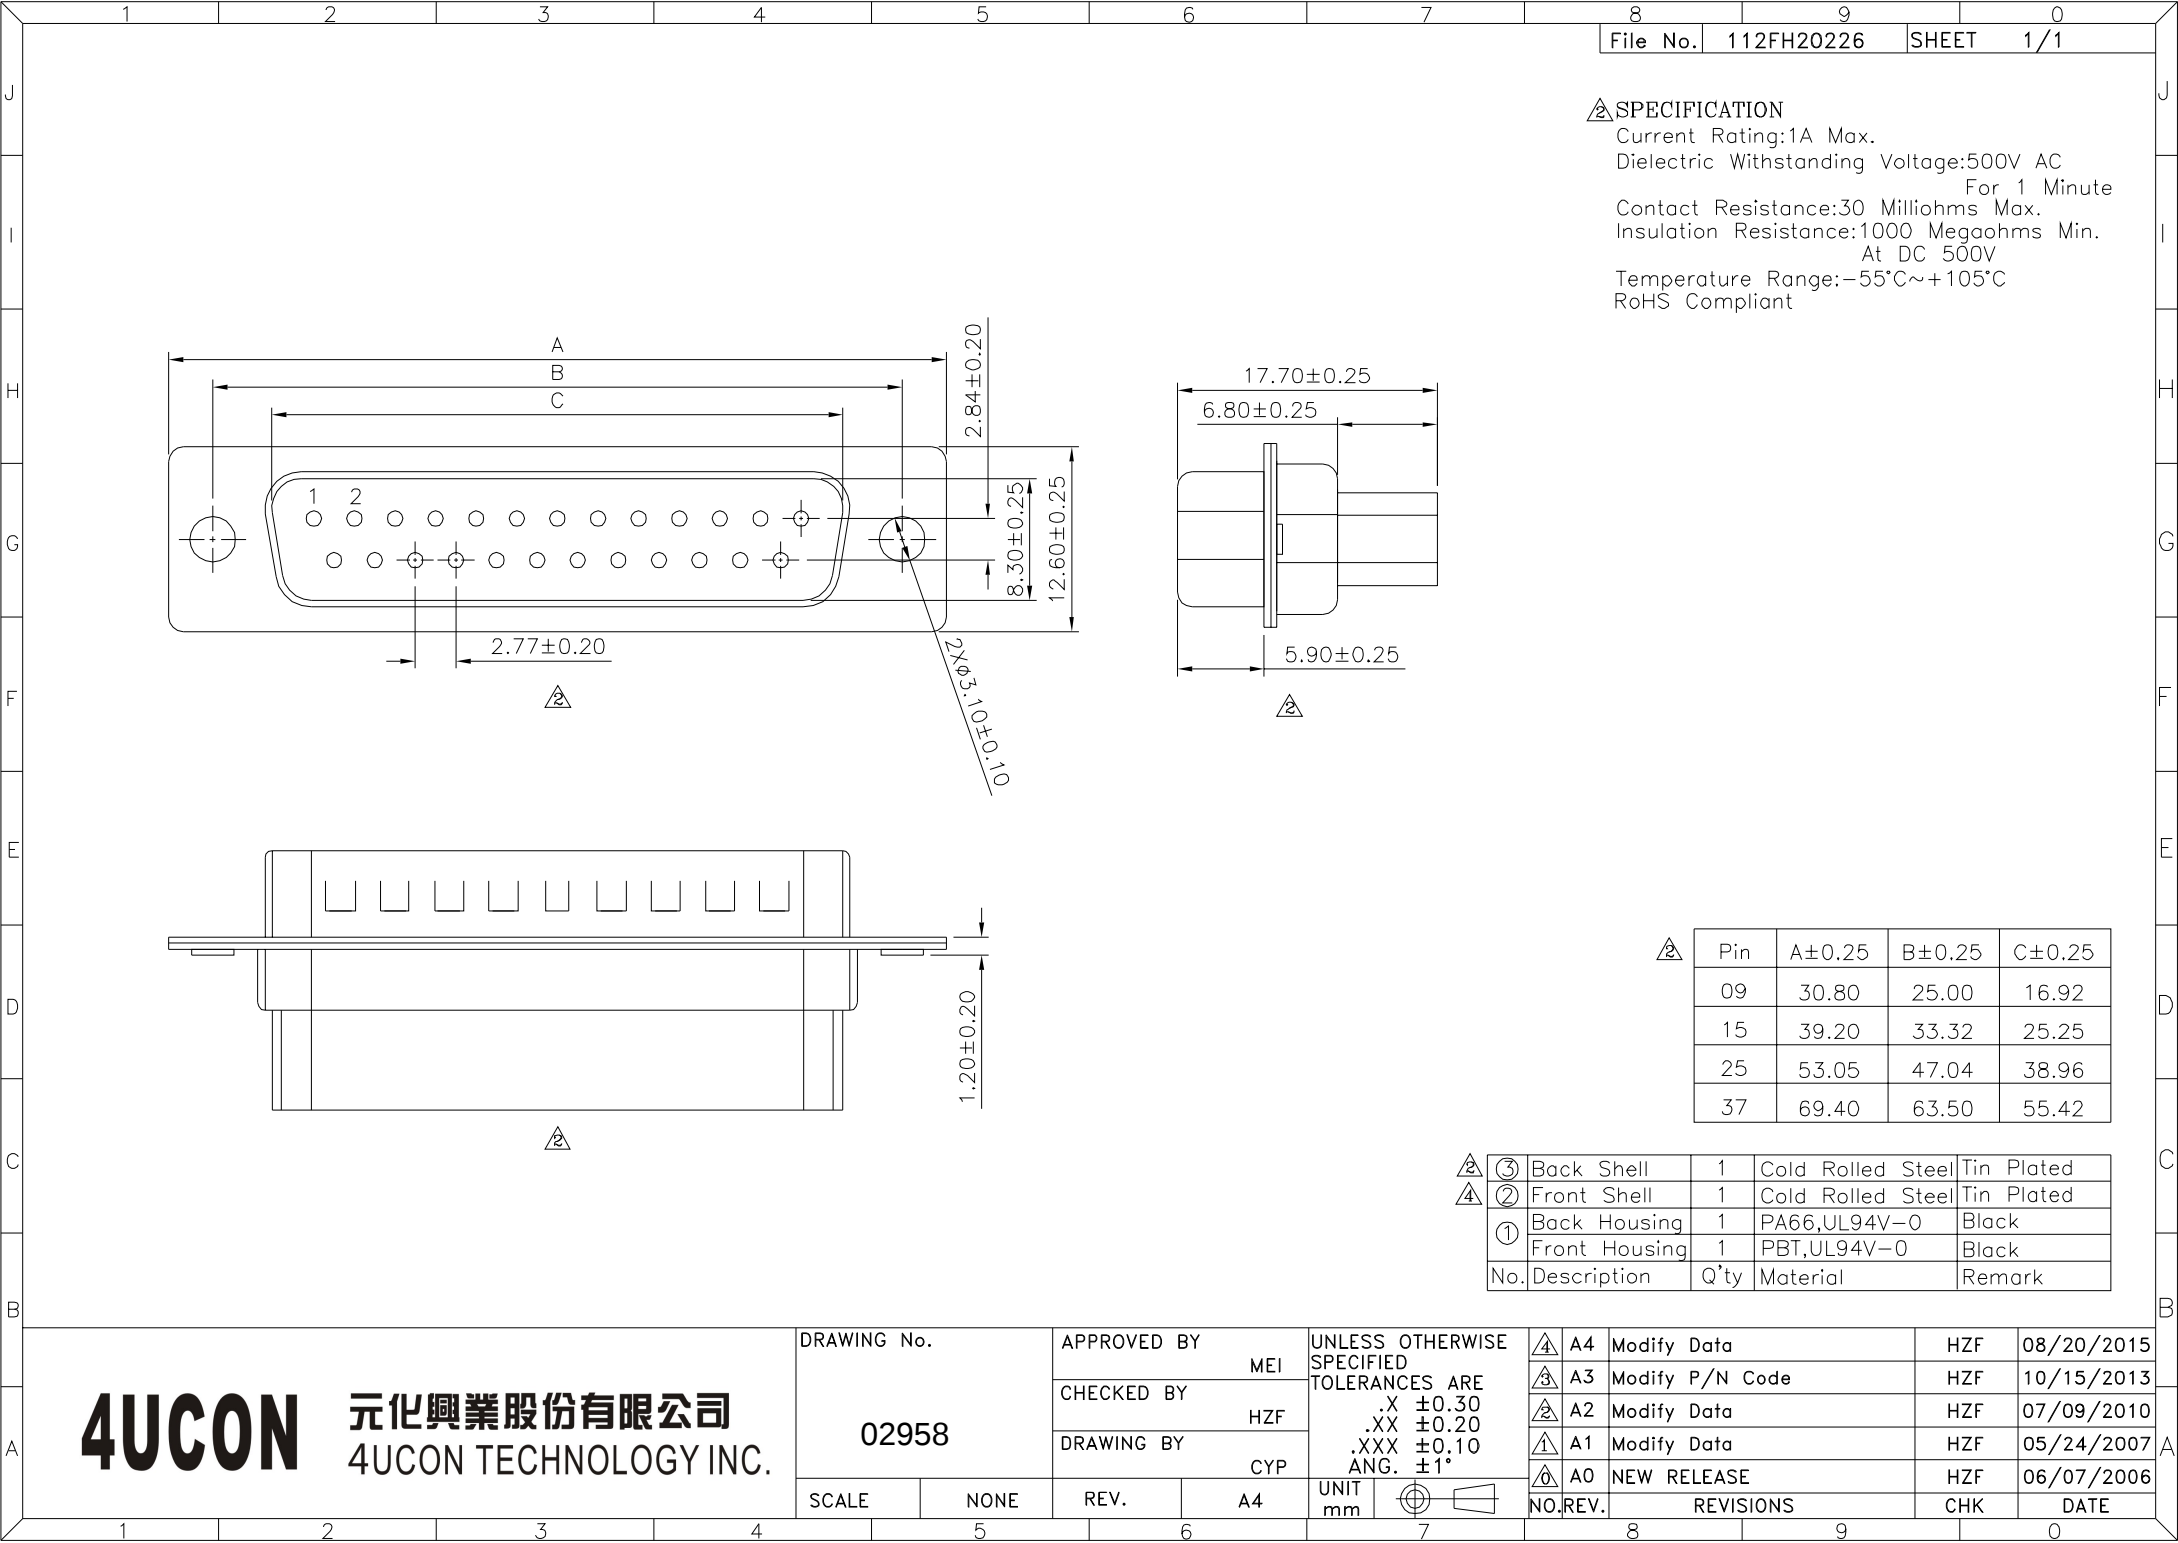

△ SPECIFICATION
Current Rating:1A Max.
Dielectric Withstanding Voltage:500V AC
For 1 Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
At DC 500V
Temperature Range:-55°C~+105°C
RoHS Compliant

△	Pin	A±0.25	B±0.25	C±0.25
	09	30.80	25.00	16.92
	15	39.20	33.32	25.25
	25	53.05	47.04	38.96
	37	69.40	63.50	55.42

△	③	Back Shell	1	Cold Rolled Steel	Tin Plated
△	②	Front Shell	1	Cold Rolled Steel	Tin Plated
	①	Back Housing	1	PA66,UL94V-0	Black
		Front Housing	1	PBT,UL94V-0	Black
	No.	Description	Q'ty	Material	Remark

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	HZF
		DRAWING BY	CYP
		SCALE	NONE
		REV.	A4

02958

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±1°



△	A4	Modify Data	HZF	08/20/2015
△	A3	Modify P/N Code	HZF	10/15/2013
△	A2	Modify Data	HZF	07/09/2010
△	A1	Modify Data	HZF	05/24/2007
△	A0	NEW RELEASE	HZF	06/07/2006
NO.	REV.	REVISIONS	CHK	DATE