
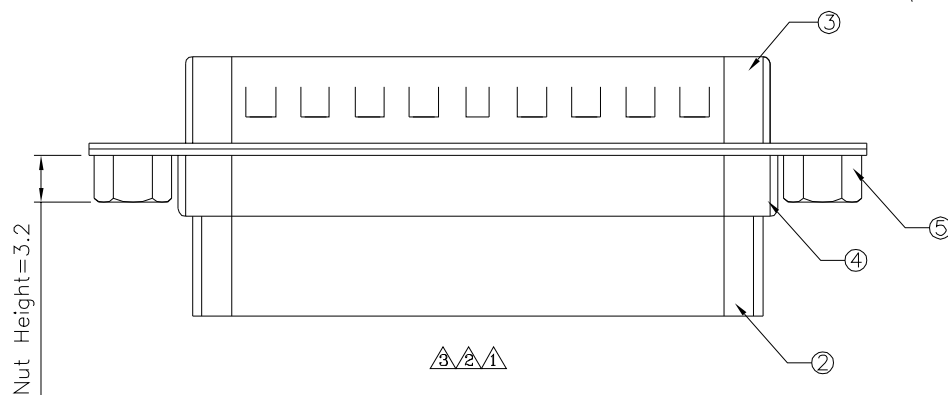
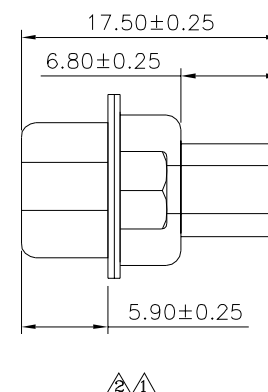


△△ SPECIFICATION

Current Rating:1A Max.
Dielectric Withstanding Voltage:500V(AC)
For 1 Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
At DC 500V
Temperature Range:-55°C~+105°C
RoHS Compliant

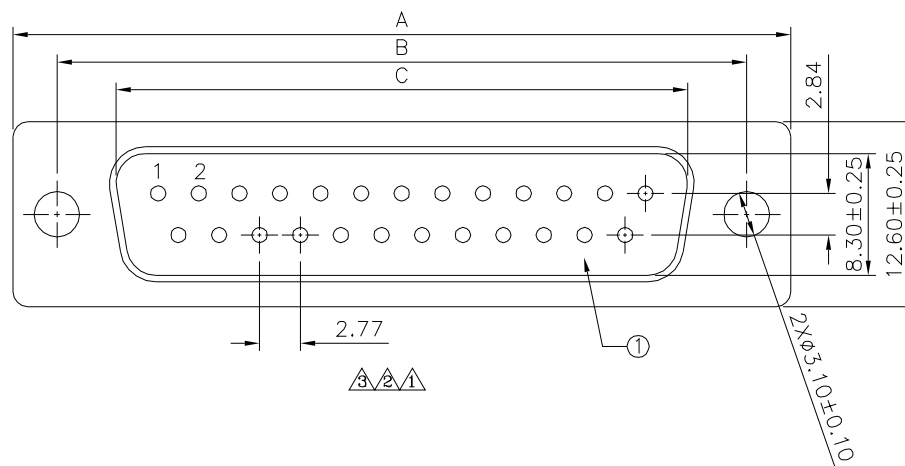

△△ Pin	A±0.25	B±0.25	C±0.25
09	30.80	25.00	16.92
15	39.20	33.32	25.25
25	53.05	47.04	38.96
37	69.40	63.50	55.42

⑤ Nut	2	Brass	Nickel Plated	
④ Back Shell	1	Cold Rolled Steel	Tin Plated Over Copper	
③ Front Shell	1	Cold Rolled Steel	Nickel Plated Over Copper	
② Back Housing	1	PA66(UL94V-0)	—————	
① Front Housing	1	PBT(UL94V-0),Black	—————	
No.	Description	Q'ty	Material	Remark

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

02960

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE


NONE

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±1°

UNIT
mm



No.

REV.

A3

A2

A1

A0

Modify Data

Modify Data

Modify Data

NEW RELEASE

REVISIONS

CHK

DATE

HZF

HZF

HZF

HZF

05/10/2018

08/20/2015

09/30/2010

06/14/2006