
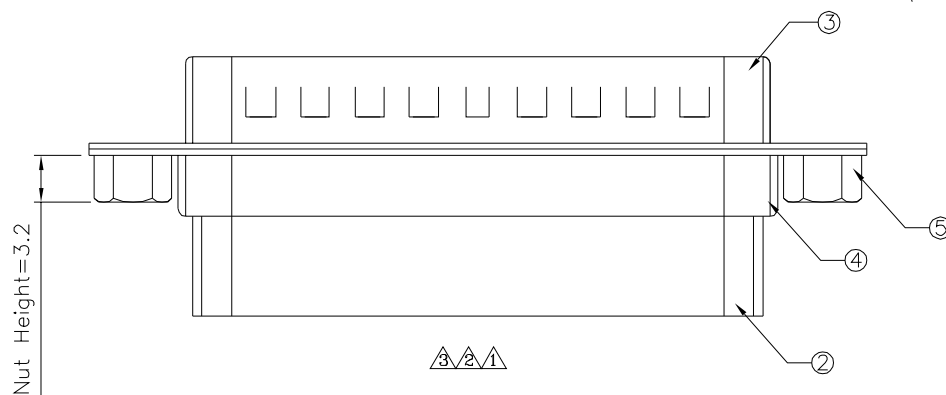
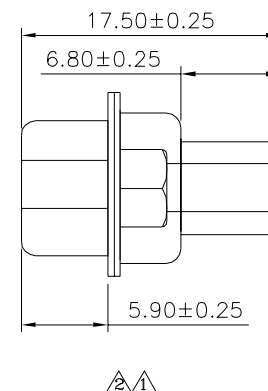


△△ SPECIFICATION

Current Rating:1A Max.
Dielectric Withstanding Voltage:500V(AC)
For 1 Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
At DC 500V
Temperature Range:-55°C~+105°C
RoHS Compliant

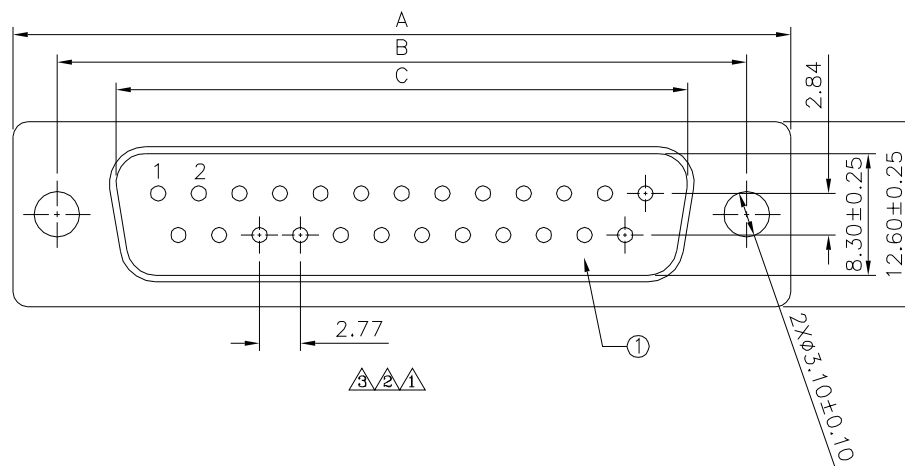

△△	Pin	A±0.25	B±0.25	C±0.25
	09	30.80	25.00	16.92
	15	39.20	33.32	25.25
	25	53.05	47.04	38.96
	37	69.40	63.50	55.42

⑤	Nut	2	Brass	Nickel Plated	
④	Back Shell	1	Cold Rolled Steel	Tin Plated Over Copper	
③	Front Shell	1	Cold Rolled Steel	Nickel Plated Over Copper	
②	Back Housing	1	PA66(UL94V-0)	_____	
①	Front Housing	1	PBT(UL94V-0),Black	_____	
△	No.	Description	Q'ty	Material	Remark

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.
02963

APPROVED BY
MEI
CHECKED BY
HZF
DRAWING BY
CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±1°



△	A3	Modify Data	HZF	05/10/2018
△	A2	Modify Data	HZF	08/20/2015
△	A1	Modify Data	HZF	09/30/2010
△	A0	NEW RELEASE	HZF	06/14/2006
NO.	REV.	REVISIONS	CHK	DATE