


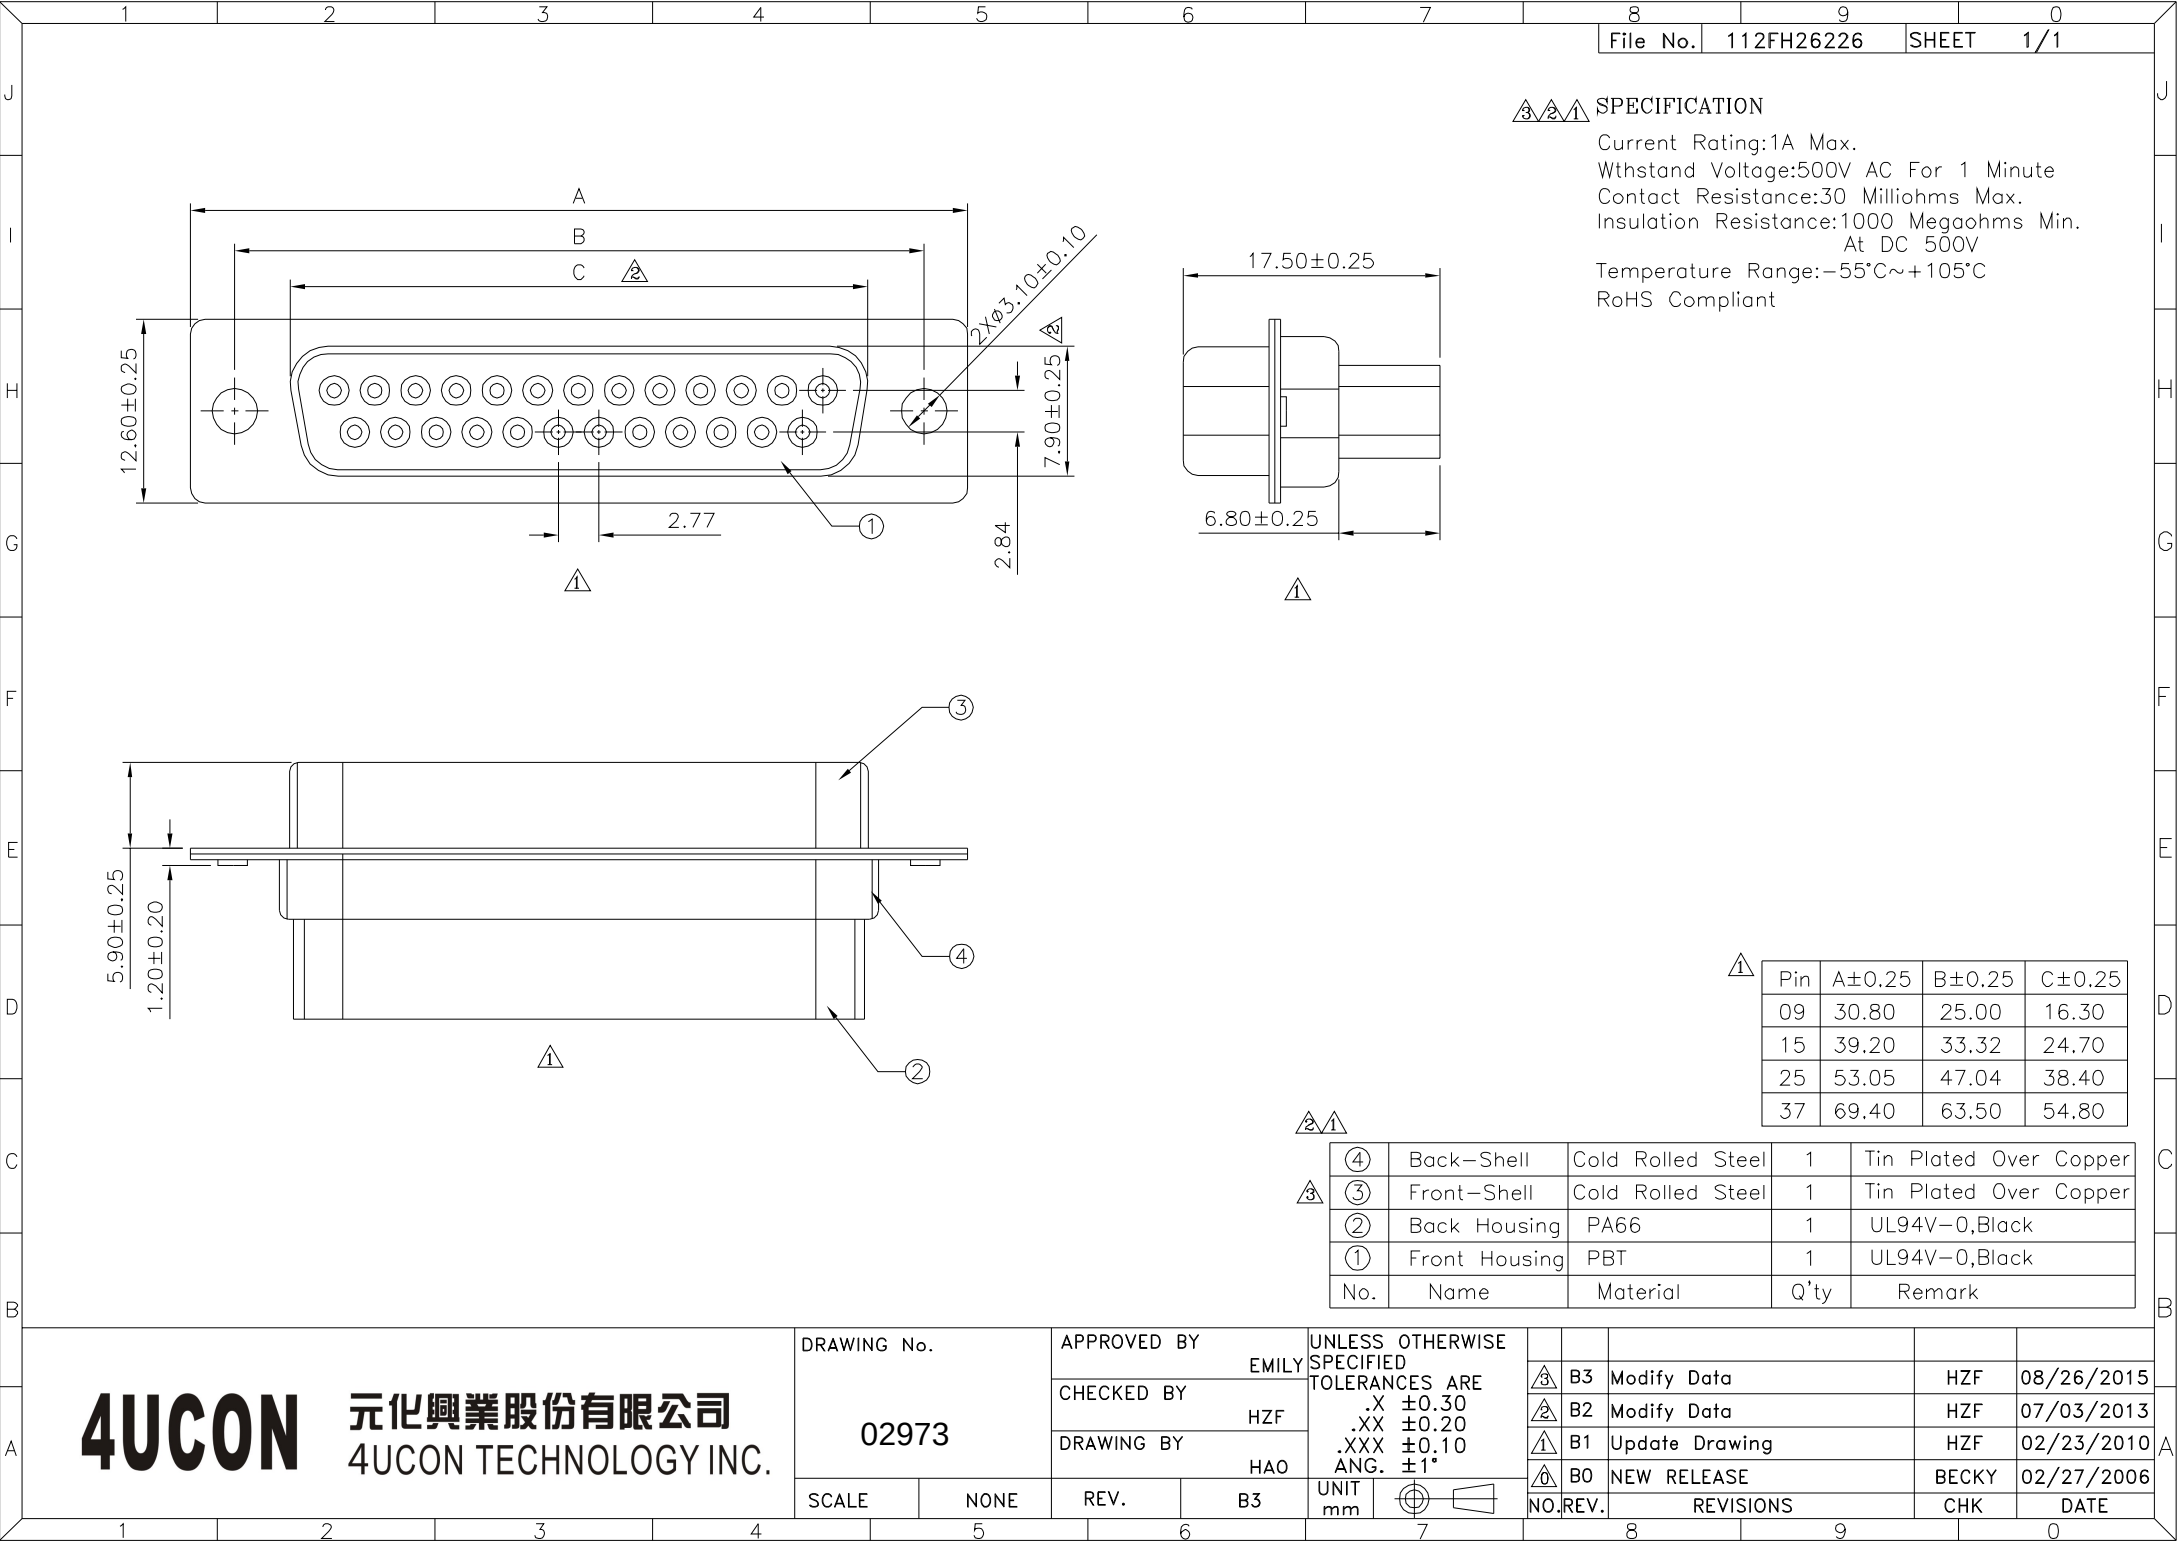

△△△ SPECIFICATION
Current Rating:1A Max.
Wthstand Voltage:500V AC For 1 Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
At DC 500V
Temperature Range:-55°C~+105°C
RoHS Compliant

△ Pin	A±0.25	B±0.25	C±0.25
09	30.80	25.00	16.30
15	39.20	33.32	24.70
25	53.05	47.04	38.40
37	69.40	63.50	54.80

△△	④	Back-Shell	Cold Rolled Steel	1	Tin Plated Over Copper
△	③	Front-Shell	Cold Rolled Steel	1	Tin Plated Over Copper
	②	Back Housing	PA66	1	UL94V-0,Black
	①	Front Housing	PBT	1	UL94V-0,Black
	No.	Name	Material	Q'ty	Remark

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		EMILY	
		CHECKED BY	HZF
02973		DRAWING BY	HAO
		SCALE	NONE
REV.		B3	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
.X	±0.30	△ B3	Modify Data	HZF	08/26/2015
.XX	±0.20	△ B2	Modify Data	HZF	07/03/2013
.XXX	±0.10	△ B1	Update Drawing	HZF	02/23/2010
ANG.	±1°	△ B0	NEW RELEASE	BECKY	02/27/2006
UNIT	mm	NO.	REV.	REVISIONS	CHK
					DATE