

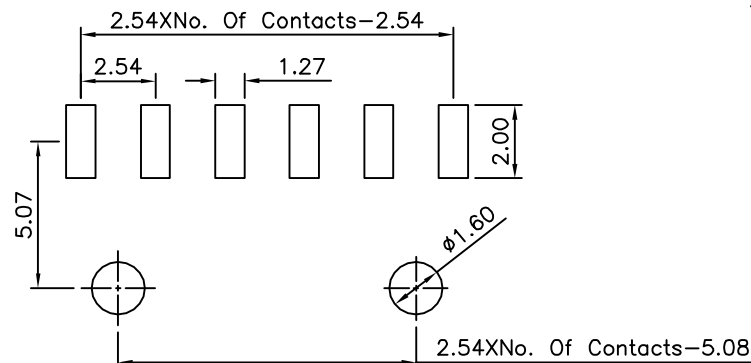
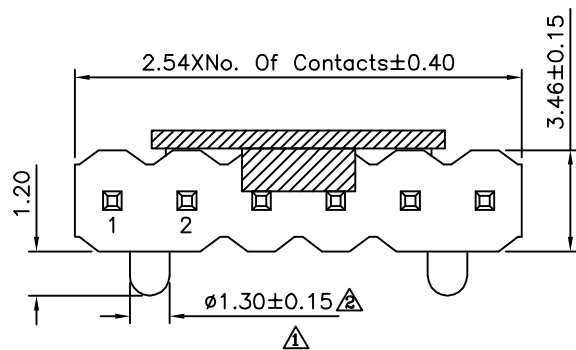


△ SPECIFICATION

Current:3A
 Withstand Voltage:1000V AC RMS
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:3~40 Contacts
 RoHS Compliant

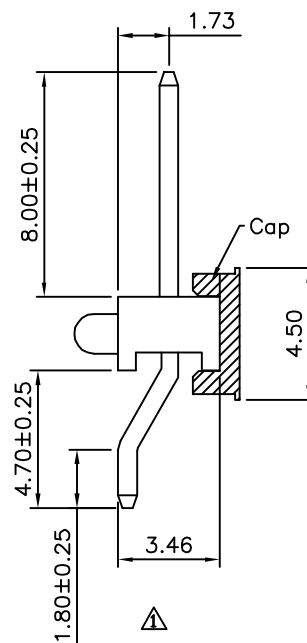

△ Recommended P.C.B Layout

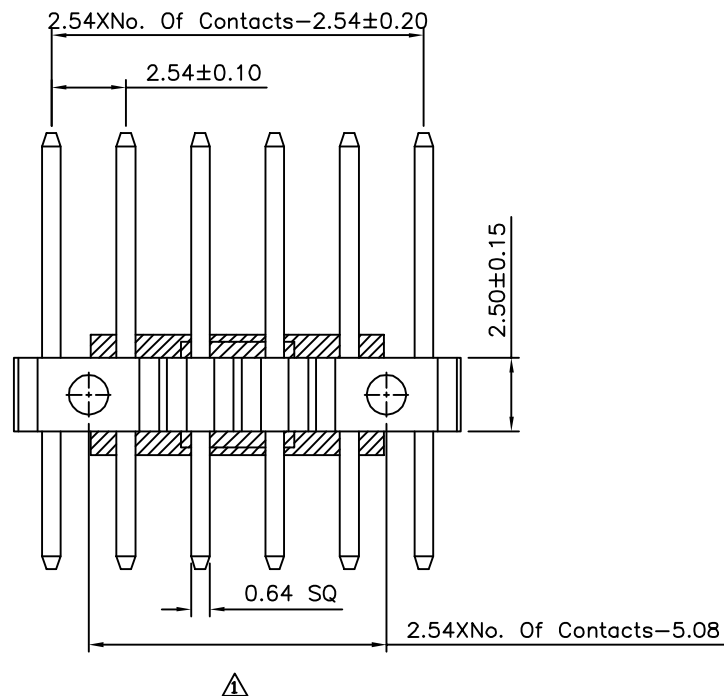

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

02980

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A2


UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT mm



	A2	Modify Dim.	HZF	03/03/2015
	A1	Modify Data	HZF	06/04/2014
	A0	NEW RELEASE	HZF	11/24/2006
NO.REV.	REVISIONS		CHK	DATE