
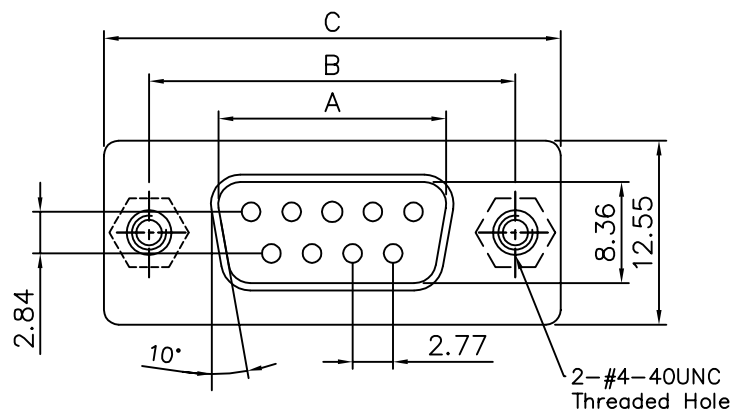




Middle Cover

SPECIFICATIONS

Current Rating : 1 AMP
 Dielectric Withstanding Voltage :
 AC 500V For 1 Minute
 Contact Resistance : 30 Milliohms Max.
 At DC 100mA
 Insulator Resistance : 1000Megohms Min.
 At DC 500V
 Operating Temperature : -55°C To +105°C
 Single Contact Insertion Force : 500g Max.
 Single Contact Withdrawal Force : 30g Min.
 Contact : Phosphor Bronze, Tin Plated
 Housing : PBT &30% Glass Fiber UL 94V-0

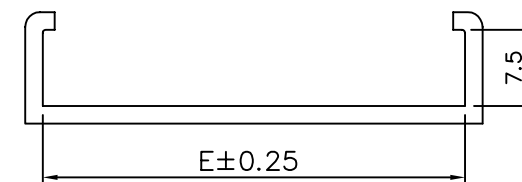

Stainless Steel Strain Relief

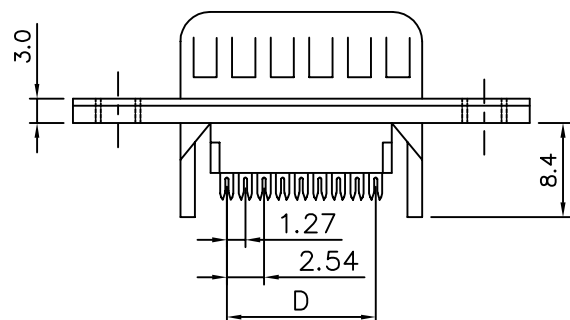

Circuits	A	B	C	D	E
09	16.92	24.99	31.16	10.16	16.40
15	25.50	33.32	39.42	17.78	24.40
25	38.96	47.04	53.34	30.48	38.80
37	55.45	63.50	69.68	45.72	55.00

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

03029

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ± 0.10

.XX ± 0.05

.XXX

SCALE

NONE

REV.

A

UNIT

mm



AREA

REVISIONS

CHK

DATE