
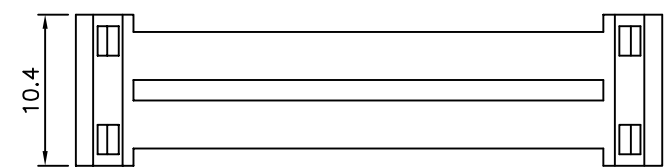
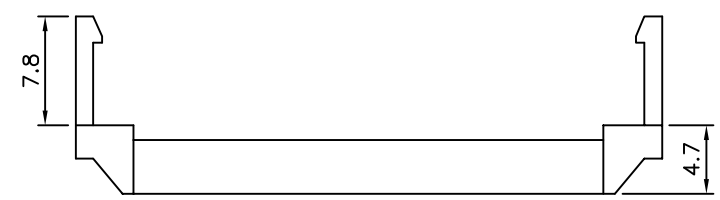
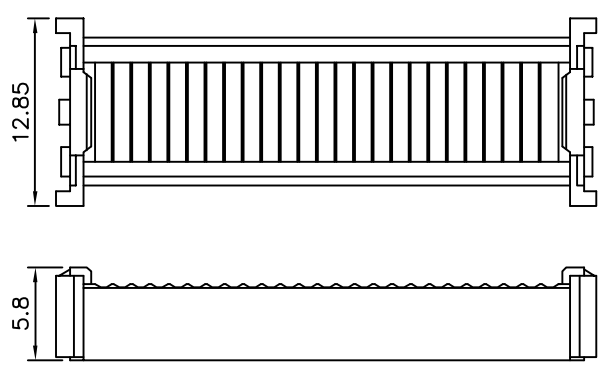



**SPECIFICATION**

Current Rating:3 Amp  
 Voltage Rating:250V AC/RMS 60Hz  
 Contact Resistance:20 Milliohms Max. At 1 Amp DC  
 Insulation Resistance:1000 Megaohms At 500V DC  
 Dielectric Withstanding Voltage:1000V AC/RMS 60Hz  
 For 1 Minute  
 Insulator:PBT+G.F.(UL94V-0),Blue  
 Contact:Brass,Selective Gold Flash Over Nickel  
 Shell:Steel,Tin Plated Over Copper  
 RoHS Compliant

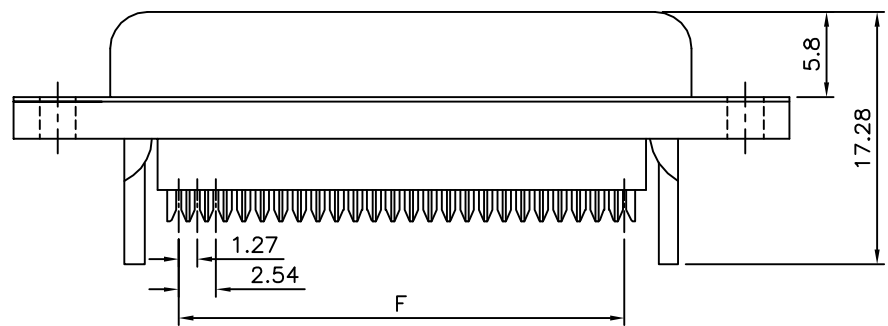

△With Insulator Support

△

△ Cover

△Strain Relief

Pin	A	B	C	E	F
09	30.81	24.99	16.33	11.08	10.16
15	39.20	33.30	24.66	19.39	17.78
25	53.05	47.04	38.38	33.24	30.48
37	69.40	63.50	54.84	49.86	45.72

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.38 X.* ±3.0° .X ±0.25 .X.* ±1.0° .XX ±0.13
03043		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		
		SONG		
SCALE	NONE	REV.	A1	UNIT
				mm

NO.	REV.	REVISIONS	CHK	DATE
△A1		Modify Data	HZF	10/04/2013
△A0		NEW RELEASE	HZF	06/03/2008