



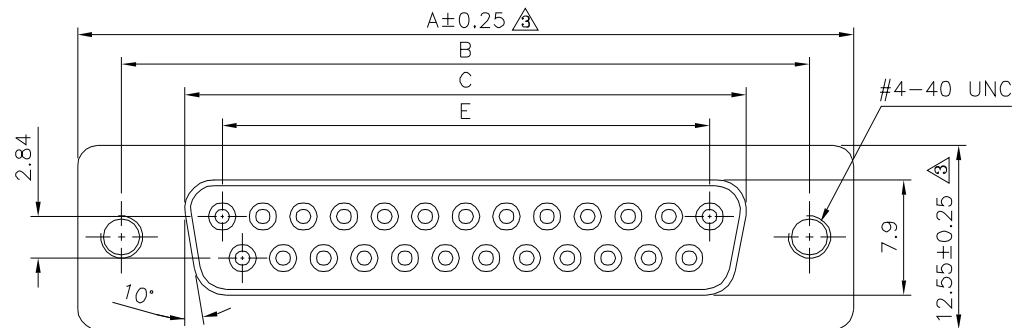


# △ SPECIFICATION


- △ Current Rating:3 Amp
- Voltage Rating:250V AC/RMS 60Hz
- Contact Resistance:20 Milliohms Max. At 1 Amp DC
- Insulation Resistance:1000 Megaohms At 500V DC
- Dielectric Withstanding Voltage:1000V AC/RMS 60Hz For 1 Minute
- Insulator:PBT+G.F.(UL94V-0),Blue
- △ Contact:Brass,Gold Plated On Contact Area,Tin Plated On Solder Tails,Over Nickel
- △ Shell:Steel,Nickel Plated Over Copper
- Clinch Nut:Brass,Nickel Plated
- RoHS Compliant

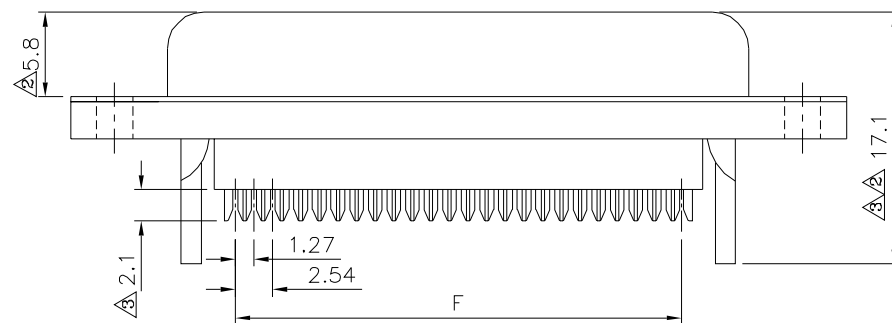


△ With Insulator Support △

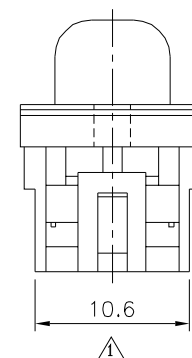

△

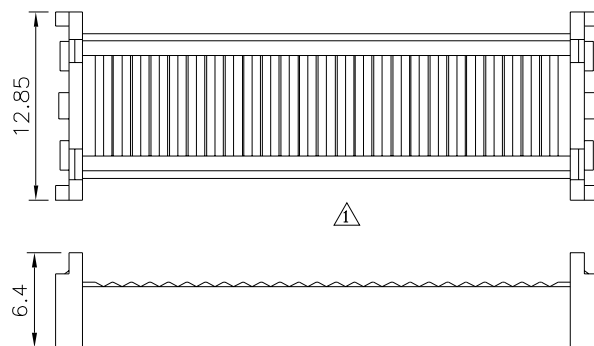

△ △ Cover

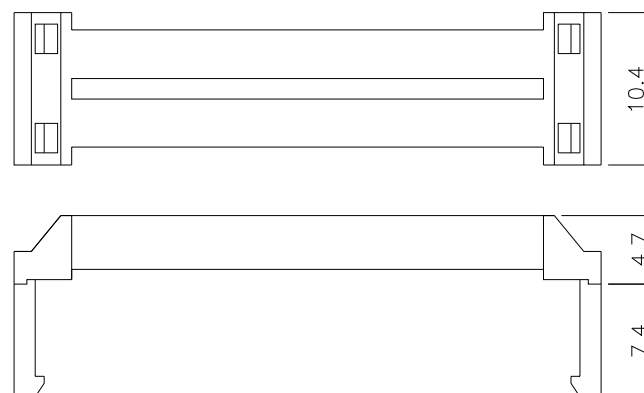

△ △ Strain Relief

△ △ △

| Pin | A     | B     | C     | E     | F     |
|-----|-------|-------|-------|-------|-------|
| 09  | 30.81 | 24.99 | 16.33 | 11.08 | 10.16 |
| 15  | 39.20 | 33.30 | 24.70 | 19.39 | 17.78 |
| 25  | 53.05 | 47.04 | 38.40 | 33.24 | 30.48 |
| 37  | 69.40 | 63.50 | 54.80 | 49.86 | 45.72 |

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No. △

03051

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

B3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X. ±0.38 .X.\* ±3.0°

.X ±0.25 .X.\* ±1.0°

.XX ±0.13 △ △

UNIT mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| △   | B3   | Modify Data | HZF | 08/02/2019 |
| △   | B2   | Modify Data | HZF | 11/01/2013 |
| △   | B1   | Modify Data | HZF | 09/07/2013 |
| △   | B0   | NEW RELEASE | HZF | 11/18/2008 |