
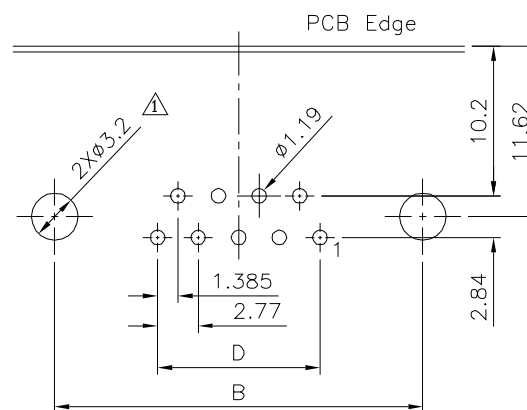
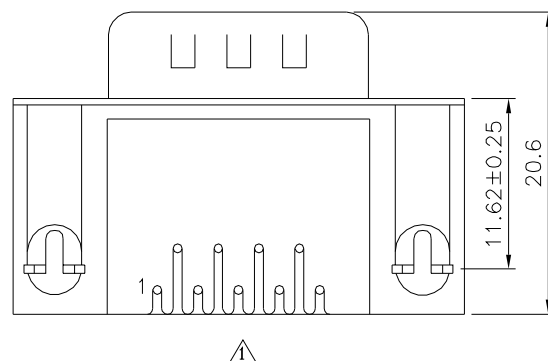
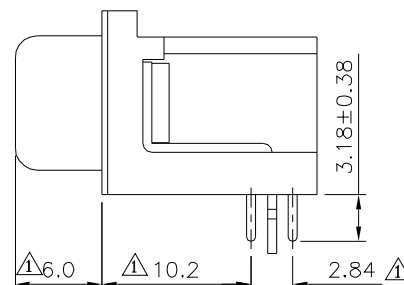


△ SPECIFICATION

Current Rating:5 Amp
 Dielectric Withstanding Voltage:1000V AC For 1 Minute
 Insulation Resistance:1000 Megaohms Min. At 500V DC
 Contact Resistance:15 Milliohms Max.
 Operating Temperature:-55°C~+105°C
 Insulator:PBT(UL94V-0),Black
 Contact:Copper Alloy,Gold Flash Over Nickel
 Shell:Steel,Nickel Plated
 Boardlock:Steel,Tin Plated
 Riveted Insert:Brass,Nickel Plated
 RoHS Compliant

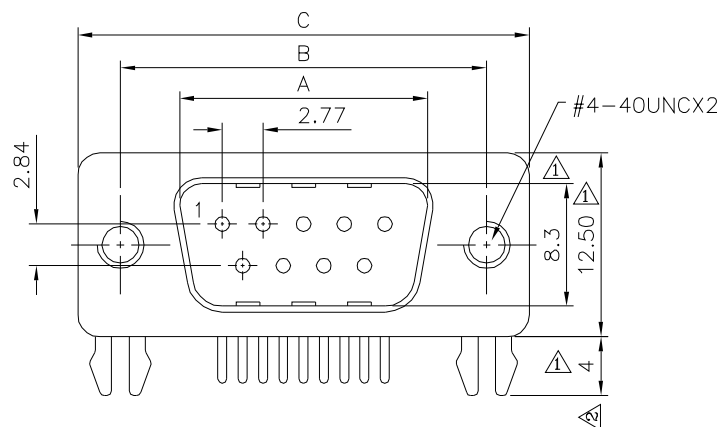

Recommended P.C.B. Layout

△ Pin	A±0.20	B±0.20	C±0.38	D
09	16.90	25.00	30.80	11.08
15	25.25	33.30	39.20	19.39
25	38.95	47.05	53.05	33.24
37	55.40	63.50	69.40	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △

03123

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

SCALE NONE

REV. A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 △ .X ±0.25
 .XX ±0.15
 .XXX ±0.05
 ANG. ±1°

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	08/20/2018
△ A1		Modify Data	HZF	10/21/2011
△ A0		NEW RELEASE		