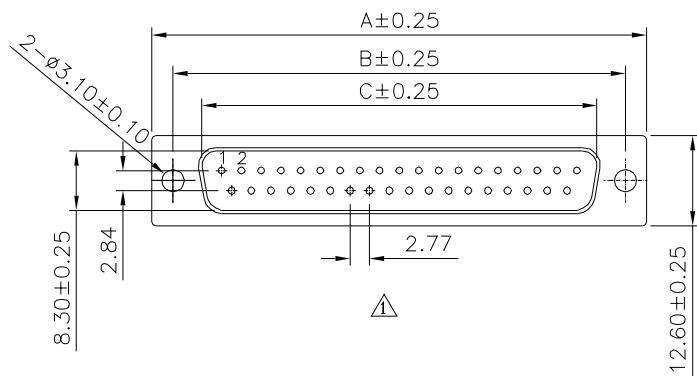


1 SPECIFICATION

Current Rating:1A Max.
Withstanding Voltage:500V AC For 1 Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min. At 500V DC
Temperature Range:-55°C~+105°C
RoHS Compliant

Pin	A	B	C
09	30.80	25.00	16.92
15	39.20	33.32	25.25
25	53.05	47.04	38.96
37	69.40	63.50	55.42

1	4	Back-Shell	Steel	1	Tin Plated Over Copper
	3	Front-Shell	Steel	1	Nickel Plated Over Copper
2	2	Contact	Brass	9~37	Gold Flash Over All,Over Nickel
	1	Housing	PBT,UL94V-0	2	Blue
2	No.	Part Name	Material	Q'ty	Finish

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

03231

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SONG

SCALE

NONE


REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±1°

UNIT
mm



2	A2	Modify Data		HZF	12/12/2023
1	A1	Modify Data		HZF	04/19/2022
0	A0	NEW RELEASE		HZF	05/27/2013
NO.	REV.	REVISIONS	CHK	DATE	