

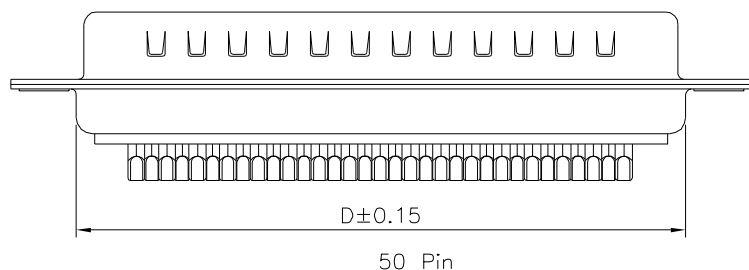
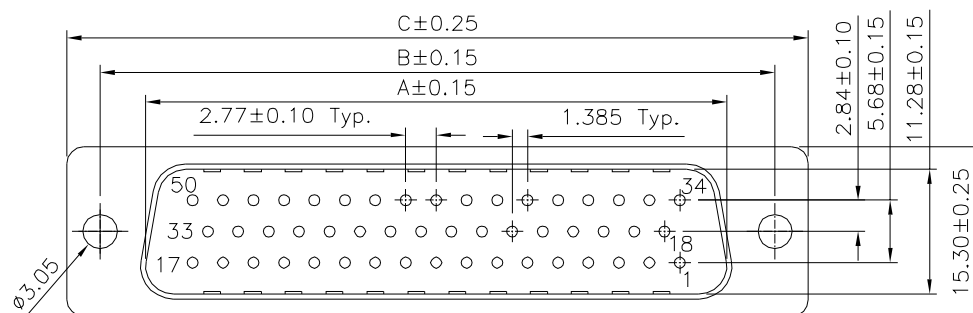

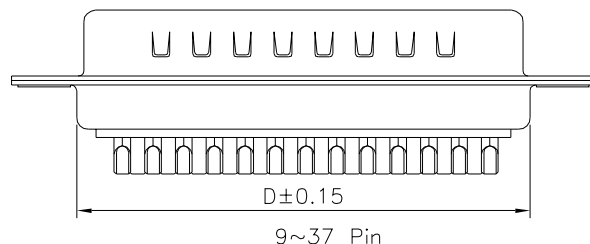


SPECIFICATION

Current Rating: 1 Amps
 Withstanding Voltage: 500V(One Minute)
 Insulation Resistance: 1000 Megaohms Min. At DC 500V
 Contact Resistance: 30 Milliohms Max.
 Operating Temperature: -40°C~+85°C
 Contact: Brass
 Gold Plated On Contact Area,
 Tin Plated On Solder Tails, Over Nickel
 Insulator: PBT+30%G.F.(UL94V-0), Blue
 Shell: SPCC, Nickel Plated Front, Tin Plated Rear
 RoHS Compliant

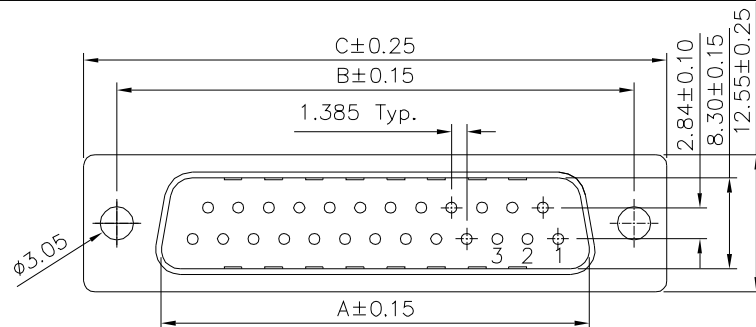

Pin	A	B	C	D
09	16.92	24.99	30.81	19.20
15	25.25	33.32	39.20	27.70
25	38.96	47.04	53.04	41.10
37	55.42	63.50	69.40	57.30
50	52.81	61.00	67.00	55.10

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

03242

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.38 .X* ±3*
 .XX ±0.25 .XX* ±1*
 .XXX ±0.05 .XXX* ±0.5*

UNIT
 mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

12/07/2016