



△ SPECIFICATION


Current Rating:5 Amp
 Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-55°C~+105°C
 Housing:PBT+30%G.F.(UL94V-0),Blue
 Contact:Brass,Gold Flash On Contac Area,
 Tin Plated On Solder Tail,Under Nickel
 Front Shell:SPCC,Nickel Plated Over Copper
 Back Shell:SPCC,Tin Plated Over Copper
 RoHS Compliant

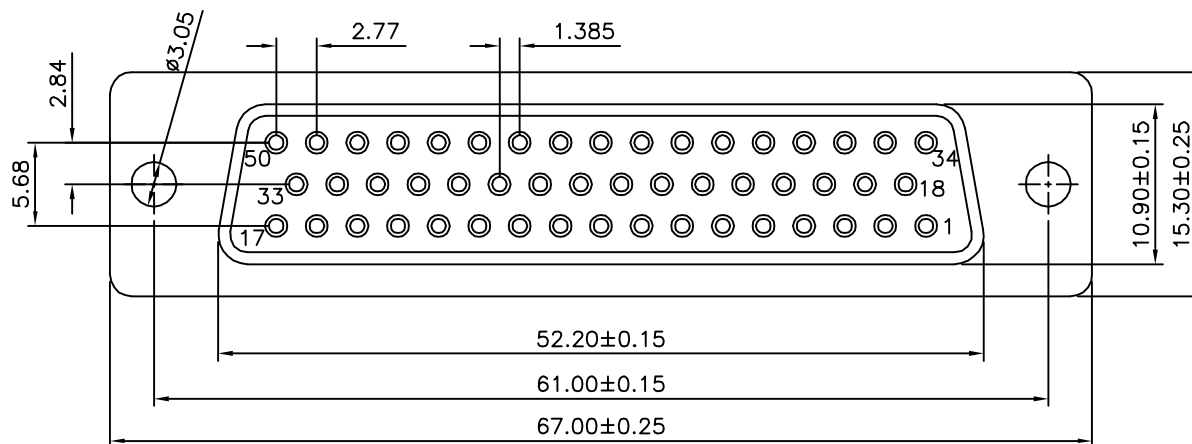

△

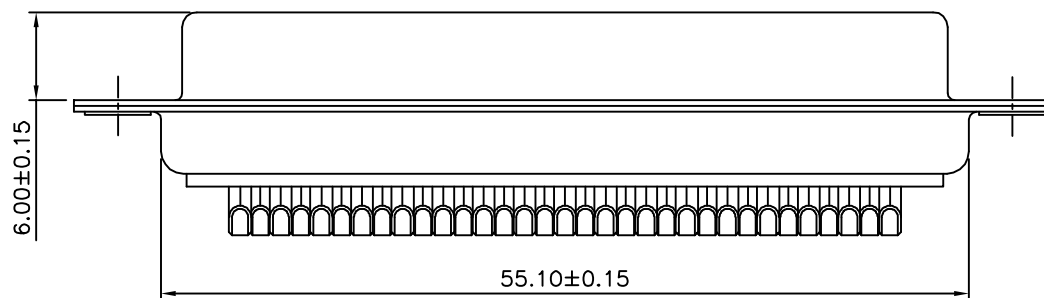

△



△

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

03351

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QQJ


REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.25 .X* ±3*
 .XX ±0.15 .XX* ±1*
 .XXX ±0.05 .XXX* ±0.5*

UNIT
 mm



△ A1

Modify Data

HZF

07/29/2010

△ A0

NEW RELEASE

HZF

01/10/2008

NO. REV.

REVISIONS

CHK

DATE