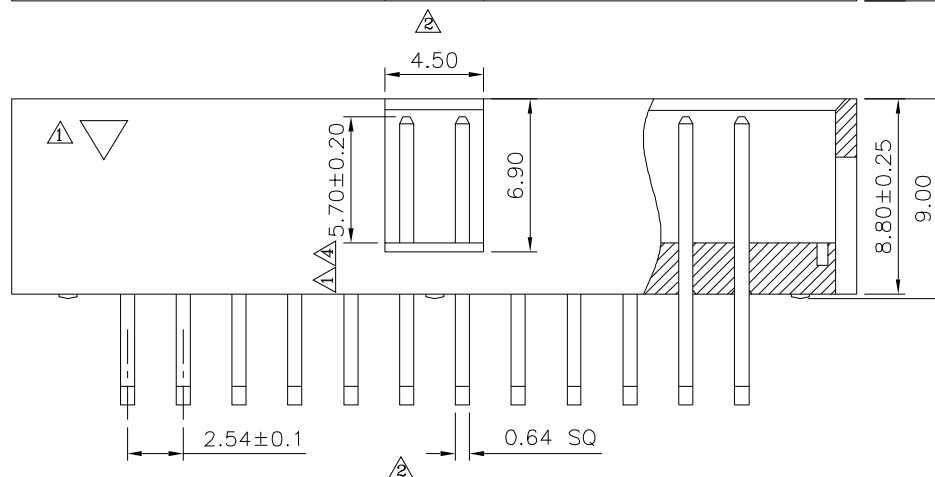
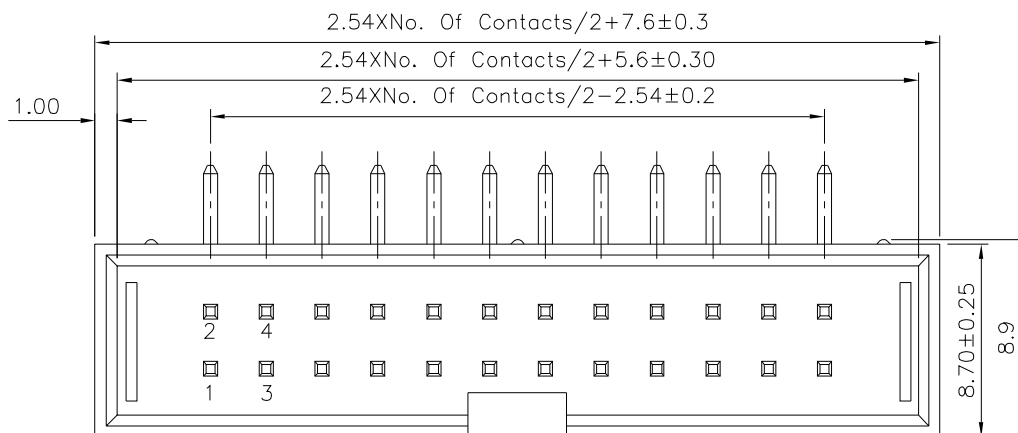


Recommended P.C.Board Layout

PCB Tolerance: ± 0.05 (Top View)

1 SPECIFICATION

Current Rating:3 Amps

△4 Withstand Voltage: 1000V AC Min./Minute

Contact Resistance:20 Milliohms Max.


Insulation Resistance:1000 Megaohms Min.

Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

3 Insulator:PBT(UL94V-0),Black

Contact:Brass,Gold Flash Over Nickel

RoHS Compliant

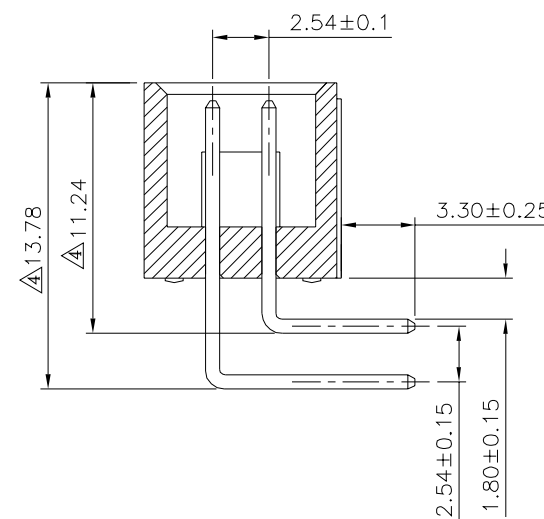

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 3

03490

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

$\triangle 1$	X. ± 0.25	X.* $\pm 2^\circ$
	.X ± 0.20	.X.* $\pm 1.5^\circ$
	.XX ± 0.15	.XX.* $\pm 1^\circ$
	.XXX ± 0.10	.XXX.* $\pm 0.5^\circ$

UNIT	mm
------	----



	Δ	$\Delta 4$
--	----------	------------

4	Modify Data
---	-------------

HZF	08/03/2022
-----	------------

$\triangle 3$	A3
---------------	----

3	Modify Data
---	-------------

HZF	03/18/2016
-----	------------

5a	$\triangle 2$	A2
----	---------------	----

2	Modify Data
---	-------------

HZF	04/17/2015
-----	------------

5	$\triangle$	
	$\triangle_1$	A1

1	Modify Data
---	-------------

HZF	08/08/2014
-----	------------

5°		100
		10

	mean, data
0	NEW RELEASE

H2F	99/99/2011
H7F	13/18/2010

U	AO
NO	REV

D	NEW RELEASE
V	REVISIONS

H2F	12/18/2010
CHK	DATE