


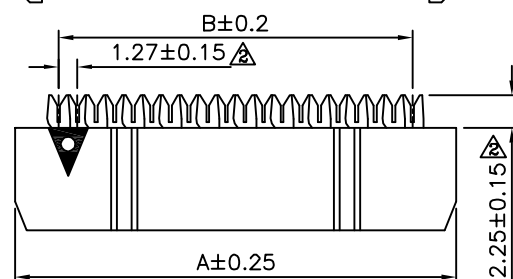





SPECIFICATION

Withstand Voltage: 500V AC For 1 Minute
Contact Resistance: 1 Ohms Max.
Insulation Resistance: 100 Megaohms Min.
At 500V DC

Operation Temperature: -40°C ~ +105°C
Insulator: PBT+G.F.(UL94V-0), Black
Contact: Brass, Selective Gold Flash Over Nickel
RoHS Compliant

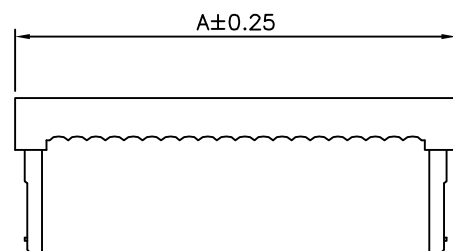

6~12P

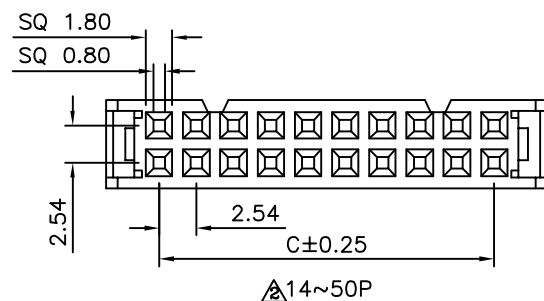

Pin	A	B	C	D
6	12.32	6.35	5.08	12.12
8	14.86	8.89	7.62	14.66
10	17.40	11.43	10.16	17.20
12	19.94	13.97	12.70	19.74
14	22.48	16.51	15.24	22.28
16	25.02	19.05	17.78	24.82
20	30.10	24.13	22.86	29.90
24	35.18	29.21	27.94	34.98
26	37.72	31.75	30.48	37.52
30	42.80	36.83	35.56	42.60
34	47.88	41.91	40.64	47.68
40	55.50	49.53	48.26	55.30
50	68.20	62.23	60.96	68.00

DRAWING No.

03673

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

SCALE


NONE

REV.

B2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.30
.X ±0.20
.XX ±0.10
.XXX ±0.05

UNIT
mm

NO.	REV.	REVISIONS	CHK	DATE
B2		Modify Data	HZF	12/26/2012
B1		Modify Drawing	BECKY	08/08/2006
B0		NEW RELEASE	BECKY	04/04/2006

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.