

△ SPECIFICATION

Contact Resistance:1 Ohms Max.

Insulation Resistance:100 Megaohms Min. At DC 500V



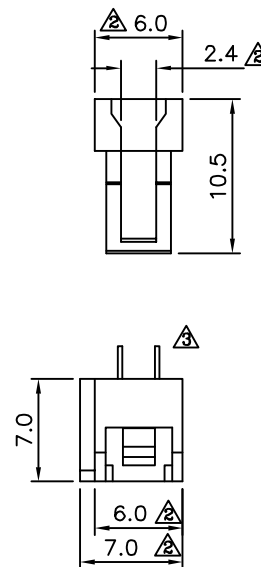
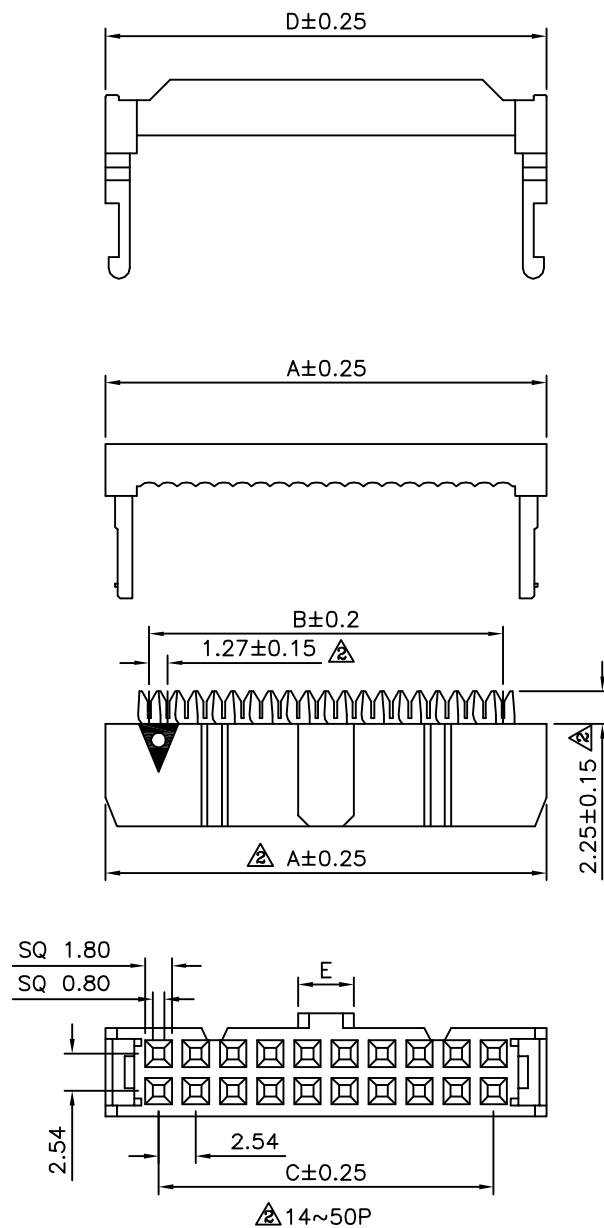
Withstanding Voltage:500V AC For 1 Minute

Operation Temperature:-40°C~+105°C

Insulator:PBT+G.F.(UL94V-0),Black

△ Contact:Brass,Selective Gold Flash Over Nickel

RoHS Compliant

 $\triangle 6 \sim 12P$ $\triangle \triangle \triangle$

Pin	A	B	C	D	E
6	12.32	6.35	5.08	12.12	1.9
8	14.86	8.89	7.62	14.66	1.9
10	17.40	11.43	10.16	17.20	3.8
12	19.94	13.97	12.70	19.74	3.8
14	22.48	16.51	15.24	22.28	3.8
16	25.02	19.05	17.78	24.82	3.8
20	30.10	24.13	22.86	29.90	3.8
24	35.18	29.21	27.94	34.98	3.8
26	37.72	31.75	30.48	37.52	3.8
30	42.80	36.83	35.56	42.60	3.8
34	47.88	41.91	40.64	47.68	3.8
40	55.50	49.53	48.26	55.30	3.8
50	68.20	62.23	60.96	68.00	3.8

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

03676

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

REV.

B3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
 $\triangle \triangle$ X. ± 0.30
 $\triangle$.X ± 0.20
.XX ± 0.10
.XXX ± 0.05

UNIT
mm $\triangle$ B3

Modify Data

HZF

06/24/2015

 $\triangle$ B2

Modify Data

HZF

09/24/2010

 $\triangle$ B1

Del Pin#60, Pin#64

HZF

11/28/2007

 $\triangle$ B0

NEW RELEASE

BECKY

04/04/2006

NO. REV.

REVISIONS

CHK

DATE