
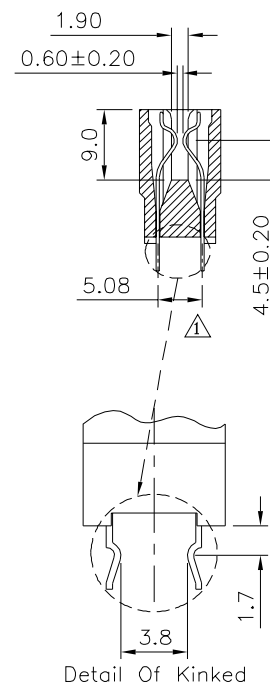
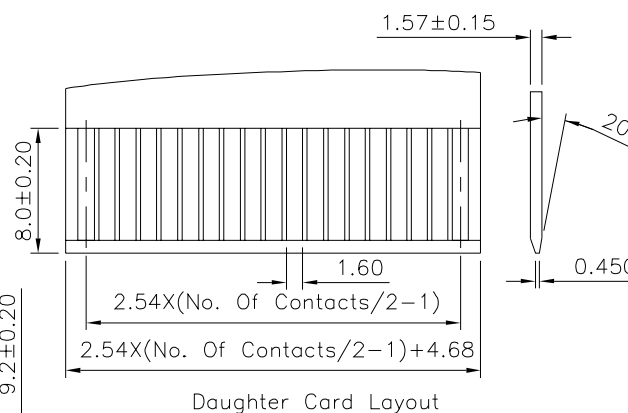
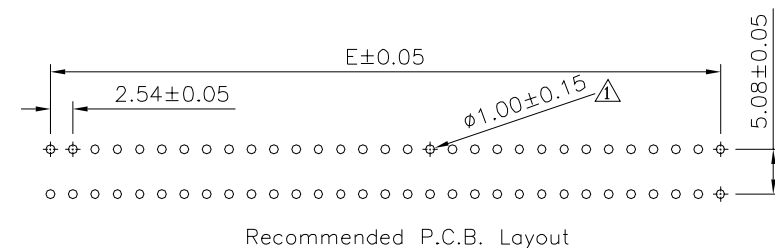
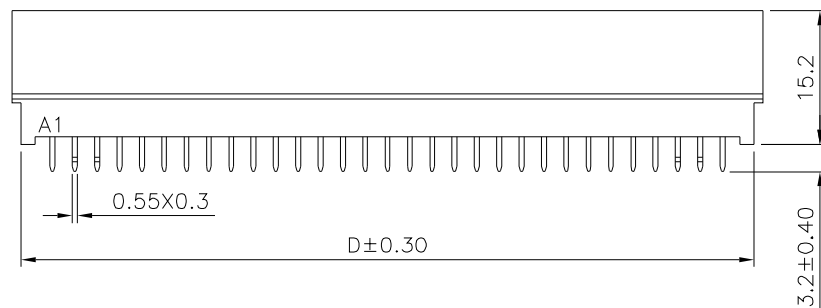


SPECIFICATION

Current Rating:3A
Withstanding Voltage:1000V AC RMS
Contact Resistance:20 Milliohms Max.
Insulation Resistance:5000 Megaohms Min. At 500V DC
Temperature Range:-55°C~+85°C
Insertion Force:340 Grams Max. Per Contact Pair
Withdrawal Force:28 Grams Max. Per Contact Pair
Insulator:PBT+G.F.(UL94V-0)
Contact:Brass,Gold Flash On Contact Area,
Tin Plated On Solder Tails,Over Nickel
RoHS Compliant

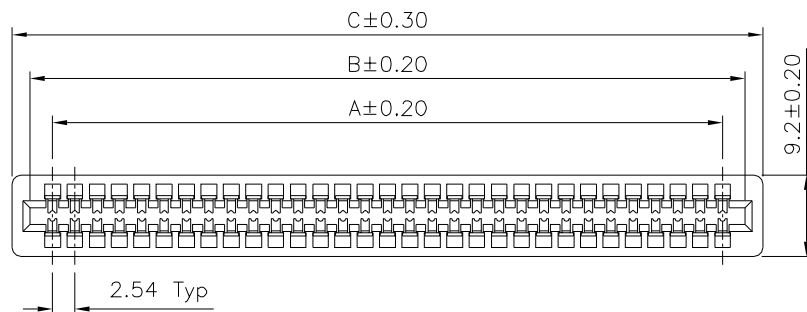

Kinded Position:

36 Pin	#A2,#A3,#A16,#A17,#B2,#B3,#B16,#B17
62 Pin	#A3,#A29,#B3,#B29

△	Pin	A	B	C	D	E
	36	43.18	48.26	52.32	50.22	43.18
	62	76.20	81.28	85.34	83.34	76.20

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

04581

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


CYP

REV.

C1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
0~10 ±0.2
10~30 ±0.3
30~100 ±0.4
100~300 ±0.5
ANG. ±0.5°

UNIT
mm



△ C1

Modify Data

HZF

07/01/2025

△ C0

NEW RELEASE

HZF

05/04/2021

NO. REV.

REVISIONS

CHK

DATE