
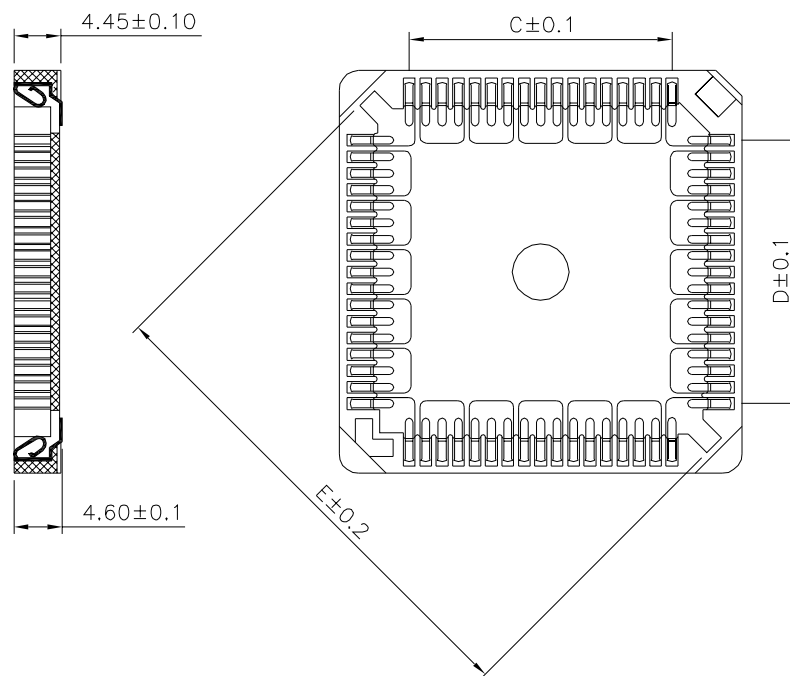
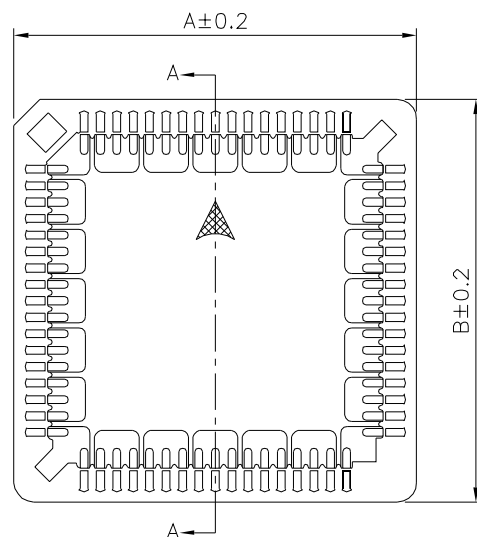


SPECIFICATION

Current Rating:1.0A AC/DC
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:600V For 1 Minute
 Temperature Range:-50°C~+105°C
 Insulator:PPS(UL94V-0),Brown
 Contact:Phosphor Bronze,Tin Plated Over Nickel
 RoHS Compliant

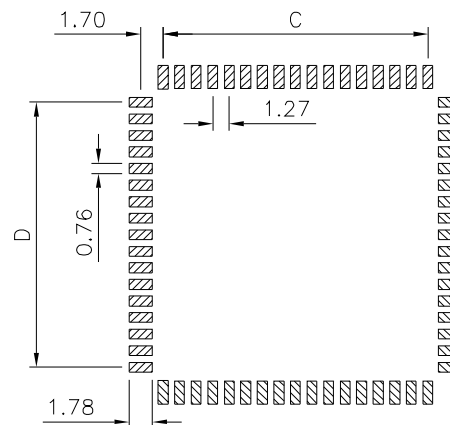

Contact	A	B	C	D	E
20	15.65	15.65	5.08	5.08	16.85
28	18.18	18.18	7.62	7.62	20.42
32	18.18	20.60	7.62	10.16	22.00
44	23.28	23.28	12.70	12.70	27.60
52	25.84	25.84	15.24	15.24	31.17
68	30.98	30.98	20.32	20.32	38.37
84	36.06	36.06	25.40	25.40	45.58

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

04689

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

B0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.25
 .XX ±0.15
 ANG.

UNIT
 mm



NO. REV.

B0 NEW RELEASE

REVISIONS

CHK

DATE

△ B0

NEW RELEASE

HZF

02/07/2024