




△ SPECIFICATION

Current Rating:1.5A Max.
Voltage Rating:150V AC Max.
Operating Temperature:-40°C~85°C
Housing:PBT+G.F.(UL94V-0),Black
Contact:Phosphor Bronze




Gold Plated 6u" Over All,Over Nickel
Cavity Confirms To FCC Rules And Regulations
Part 68 Subpart F
RoHS Compliant



Detail A

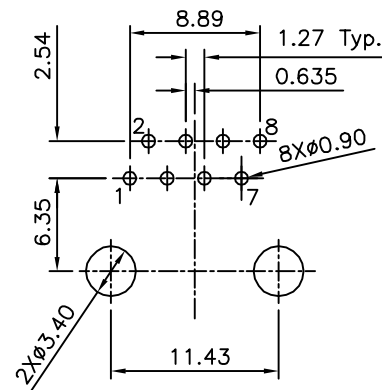

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)Thickness:1.6mm

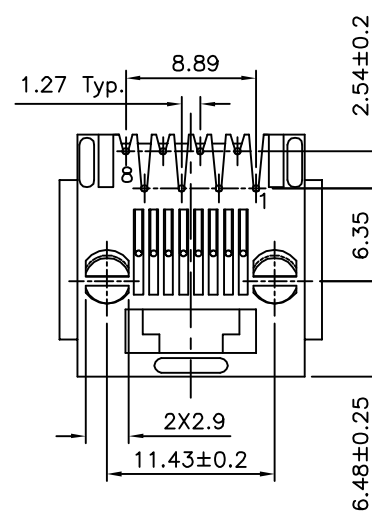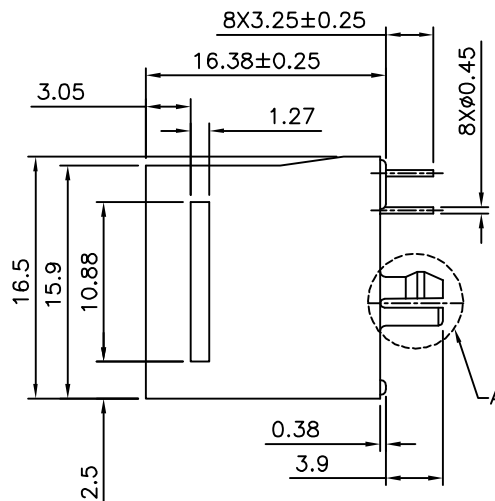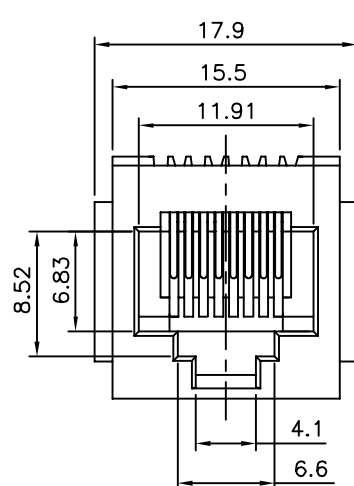

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

04916

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO


REV.

AOB

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.25
.XX ±0.13
.XXX ±0.05

UNIT
mm



△ AOB Modify Spec.

HZF

08/10/2015

△ AOA NEW RELEASE

HZF

07/01/2015

NO. REV.

REVISIONS

CHK

DATE