

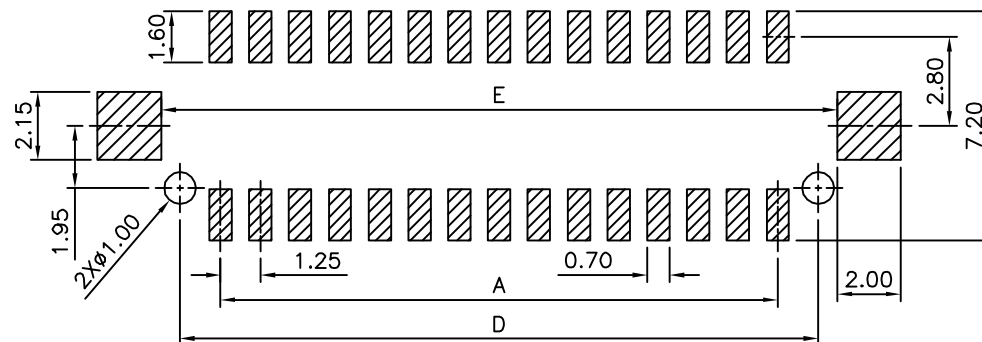
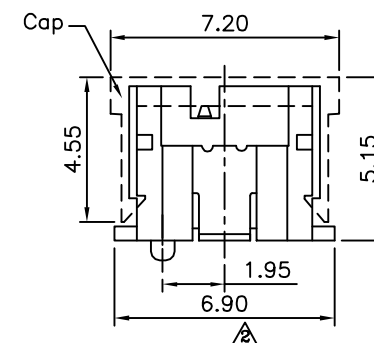


△ SPECIFICATION

Current Rating:1.0 Amp
 Voltage Rating:250V AC/DC
 Withstand Voltage:250V AC/DC
 Contact Resistance:10 Milliohms Max.
 Insulation Resistance:100 Megaohms Min.
 Operation Temperature:-25°C~+85°C
 Insulator:PA9T+30%G.F.(UL94V-0)
 Contact:Brass,Gold Flash Over All,Over Nickel
 Fixing Material:Brass,Gold Plated Over Nickel
 RoHS Compliant

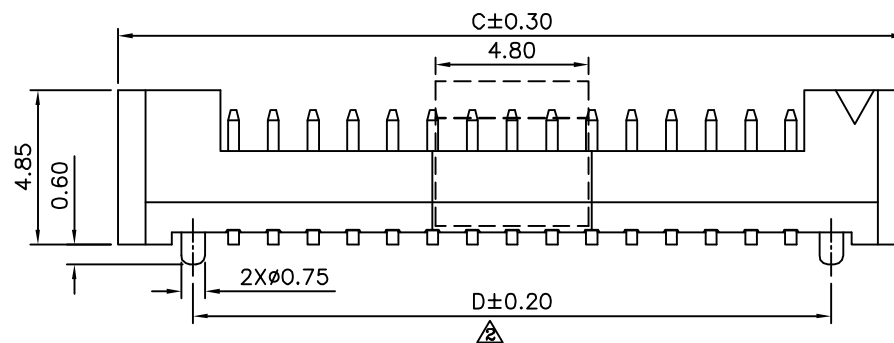

Recommended P.C.B. Layout(Top Side)
 (PCB Board Tolerance±0.05) △

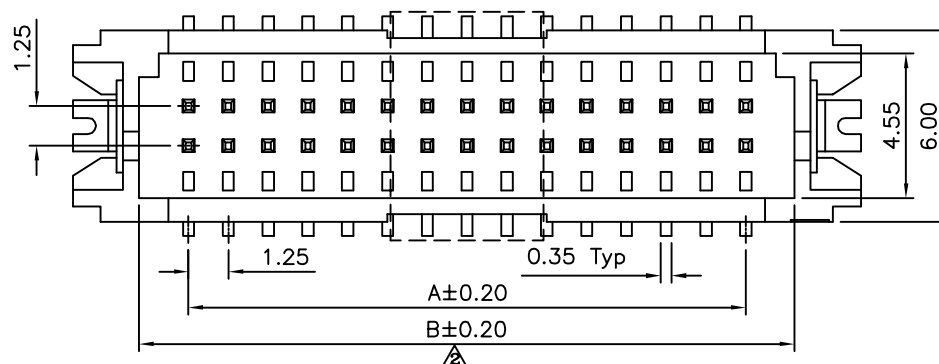

Pin	A	B	C	D	E
10	5.00	8.10	12.25	7.55	8.75
20	11.25	14.35	18.50	13.80	15.00
30	17.50	20.60	24.75	20.05	21.25
40	23.75	26.85	31.00	26.30	27.50

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

05124

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.40
 .XX ±0.25
 .XXX ±0.15
 ANG. ±3°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	03/11/2015
△ A1		Modify Data	HZF	12/05/2012
△ A0		NEW RELEASE	HZF	02/18/2012