
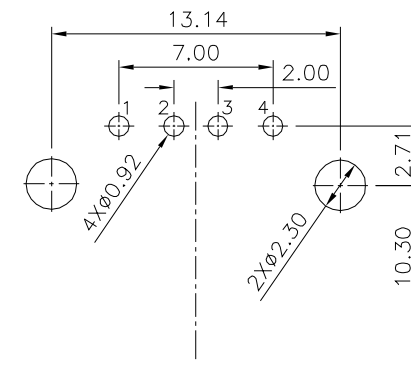
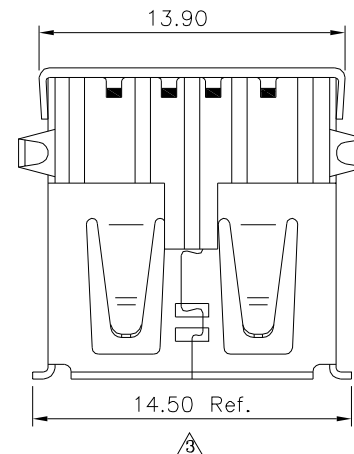
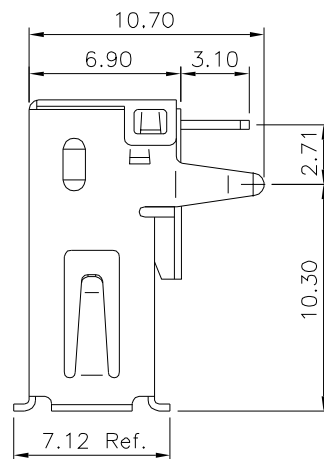
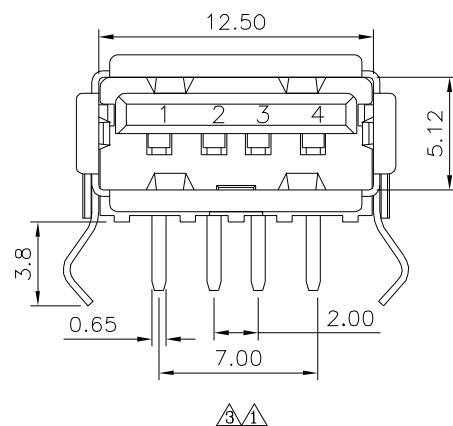
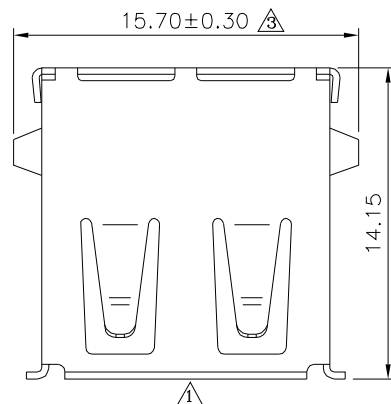


△△ SPECIFICATION

Current Rating:1.5A
Voltage-Max.:30V
Withstanding Voltage:500V AC/Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
△ Temperature Range:-55°C~+85°C
Durability:1500 Cycles Min.
Housing:PBT+30%G.F.(UL94V-0),White
Contact:Brass
Gold Flash On Contact Area
Tin Plated On Solder Tails,Over Nickel
Shell:Brass,Nickel Plated Over All
RoHS Compliant

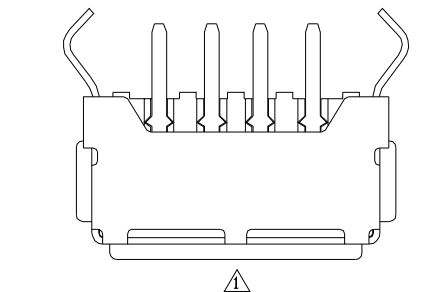

Recommended P.C.B. Layout

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

05241

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.


B3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38 △ X.* ±3*
.XX ±0.25 △ .X.* ±2*
.XXX ±0.13 △ .XX.* ±1*

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
△	B3	Modify Data	HZF	03/26/2020
△	B2	Modify Data	HZF	08/19/2015
△	B1	Modify Data	HZF	08/13/2015
△	B0	NEW RELEASE	HZF	04/27/2014