

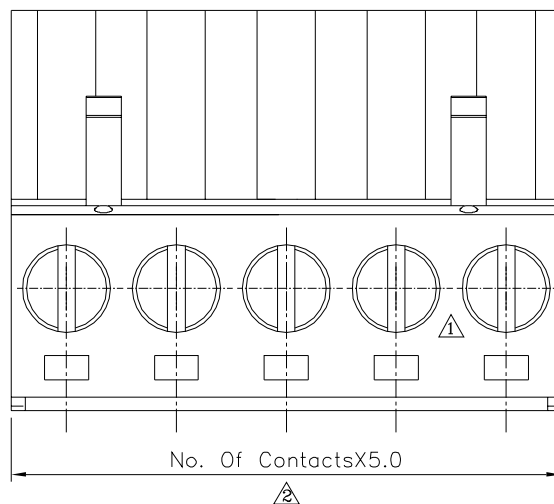


# △△△ SPECIFICATION

Voltage Rating:300V AC  
 Current Rating:20A/Way Max.  
 Contact Resistance:20 Milliohms Max.  
 Withstanding Voltage:2500V AC/Minute  
 Operation Temperature:-40°C~+105°C  
 Torque:5.0 Kgf.cm/M3  
 Wire Range:12~26 AWG  
 Contacts(Metal Housing):Copper Alloy,Nickel Plated  
 Terminal Screw:Steel,Galvanized With Cr3+ Plated  
 Wire Guard:Copper Alloy,Tin Plated  
 Insulator:Polyamide(UL94V-0),Green  
 RoHS Compliant

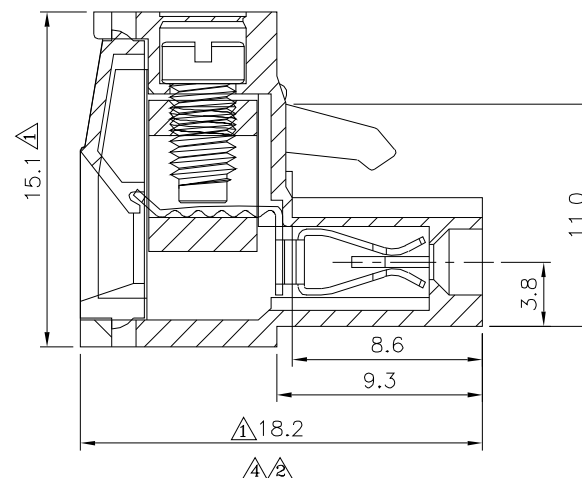

| Note      |           |
|-----------|-----------|
| Length    | Tolerance |
| 30mm      | ±0.30     |
| 30~60mm   | ±0.40     |
| 60~120mm  | ±0.50     |
| 120~220mm | ±0.60     |

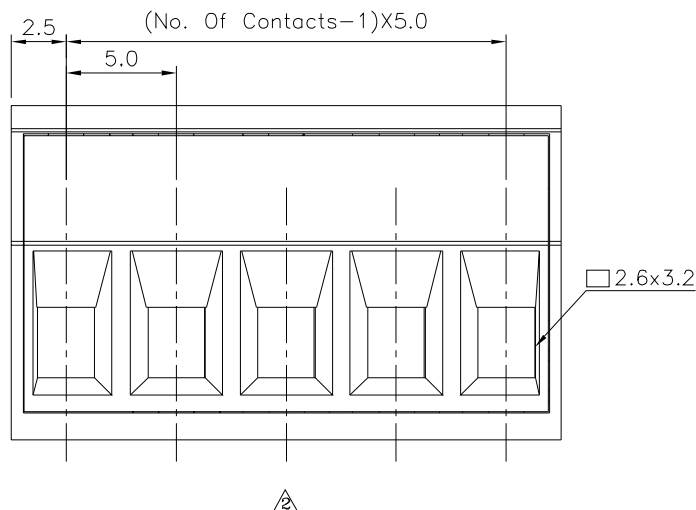

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No. △△△

05297

SCALE

NONE

REV.

A4


APPROVED BY  
 Jason Wu

CHECKED BY  
 Leo Han

DRAWING BY  
 Michelle Lee

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE △  
 X. ±0.50  
 .X ±0.40  
 .XX ±0.30  
 ANG. ±1°

UNIT  
 mm



| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| △   | A4   | Modify Data | HZF | 07/30/2026 |
| △   | A3   | Modify Data | HZF | 06/12/2015 |
| △   | A2   | Modify Data | HZF | 03/05/2015 |
| △   | A1   | Modify Data | HZF | 07/13/2010 |
| △   | A0   | NEW RELEASE | HZF | 05/13/2009 |