

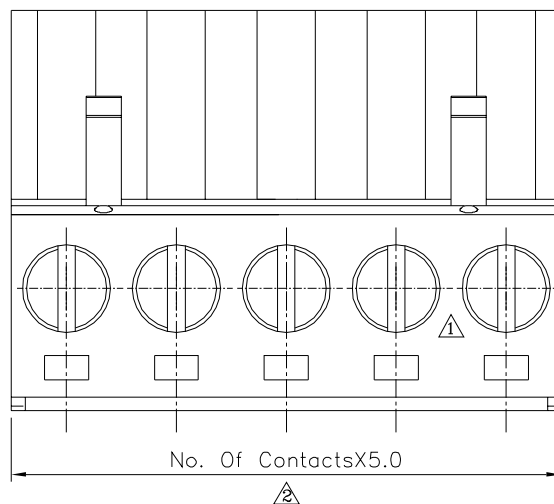


△△△ SPECIFICATION

Voltage Rating:300V AC
 Current Rating:20A/Way Max.
 Contact Resistance:20 Milliohms Max.
 Withstanding Voltage:2500V AC/Minute
 Operation Temperature:-40°C~+105°C
 Torque:5.0 Kgf.cm/M3
 Wire Range:12~26 AWG
 Contacts(Metal Housing):Copper Alloy,Nickel Plated
 Terminal Screw:Steel,Galvanized With Cr3+ Plated
 Wire Guard:Copper Alloy,Tin Plated
 Insulator:Polyamide(UL94V-0),Green
 RoHS Compliant

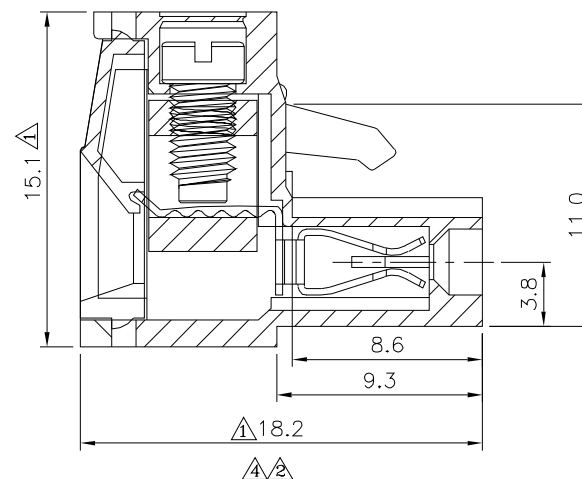

Note	
Length	Tolerance
30mm	±0.30
30~60mm	±0.40
60~120mm	±0.50
120~220mm	±0.60

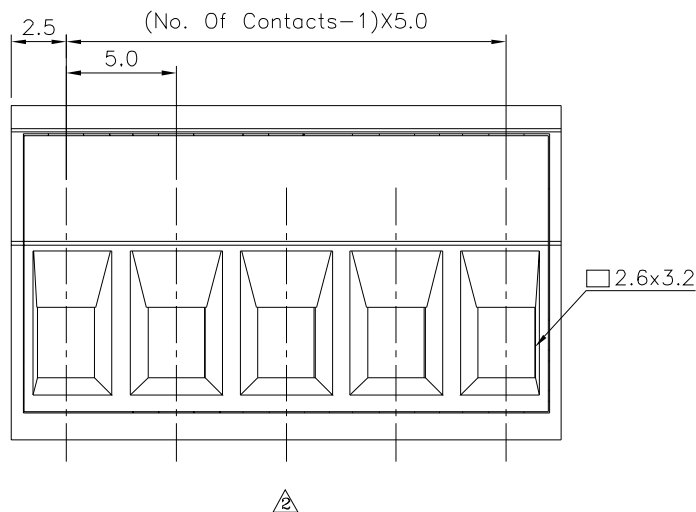

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △△△

05303

SCALE

NONE

REV.

A4

APPROVED BY
 Jason Wu

CHECKED BY
 Leo Han

DRAWING BY
 Michelle Lee

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE △
 X. ±0.50
 .X ±0.40
 .XX ±0.30
 ANG. ±1°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△	A4	Modify Data	HZF	07/30/2026
△	A3	Modify Data	HZF	06/12/2015
△	A2	Modify Data	HZF	03/05/2015
△	A1	Modify Data	HZF	07/13/2010
△	A0	NEW RELEASE	HZF	05/13/2009