File No.	689NJ30801	SHEET	1/1

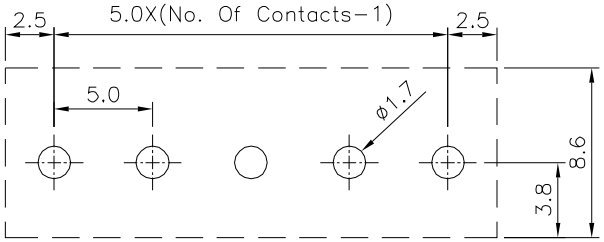

Recommended P.C.B. Layout

△3△1 SPECIFICATION

Voltage Rating:300V AC
Current Rating:16A
Withstanding Voltage:2500V AC(1 Minute)
Using Temperature Range:−40°C~+105°C
Solder Pin:Copper Alloy,Tin Plated
Insulator Body:Polyamide+G.F.(UL94V−0),Green
RoHS Compliant

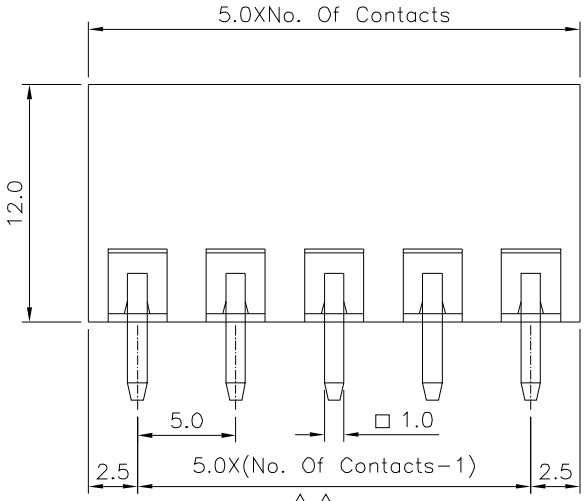

△1△2

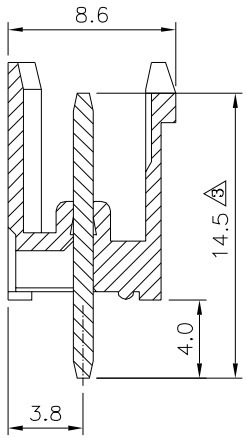

△1

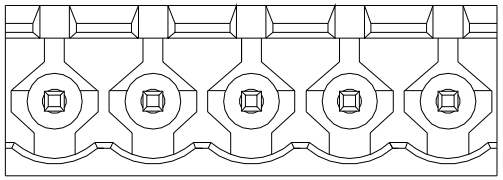

△1

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △1△3	APPROVED BY EMILY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △2 X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°
05317	CHECKED BY HZF	
	DRAWING BY HAO	
SCALE NONE	REV. A3	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modfify Data	HZF	10/30/2023
△2	A2	Modfify Data	HZF	10/24/2015
△1	A1	Modfify Data	HZF	08/08/2012
△0	A0	NEW RELEASE	HZF	08/12/2009