

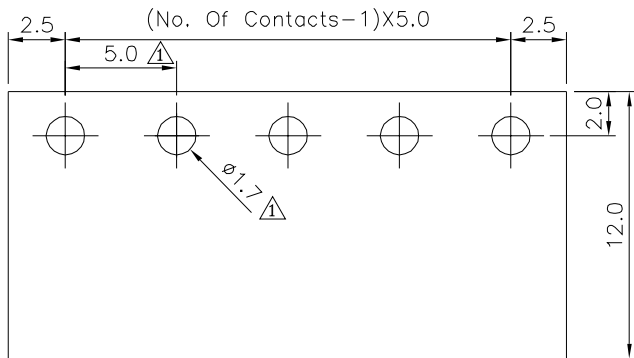
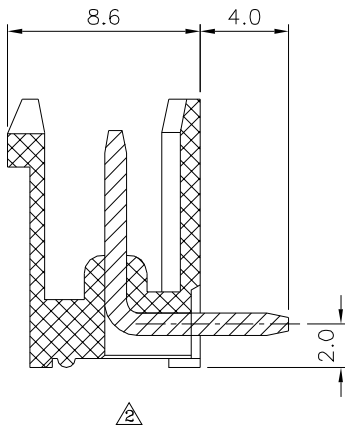


J
I
H
G
F
E
D
C
B
A

J
I
H
G
F
E
D
C
B
A

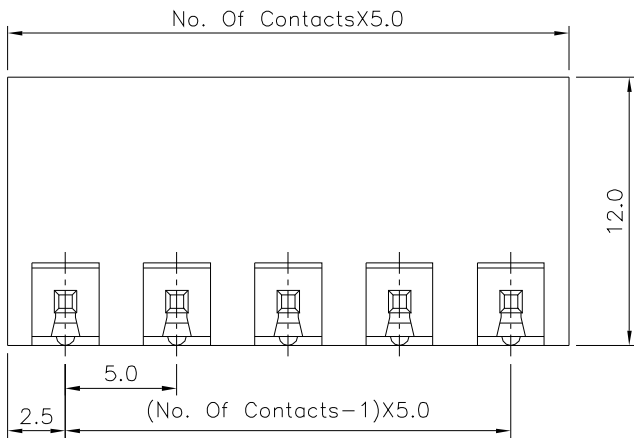

Recommended P.C.B. Layout

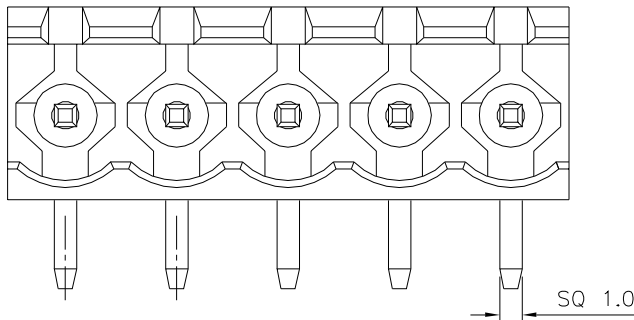

△△△ SPECIFICATION
Current Rating:16A
Voltage Rating:300V AC
Withstand Voltage:2500V AC/Minute
Using Temperature Range:-40°C~+105°C
Insulator:Polyamide+G.F.(UL94V-0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

DRAWING No. △△△ 05334		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 X°. ±1°					
		EMILY			△△ A3	Modify Data	HZF	10/29/2024	
		CHECKED BY			△△ A2	Modify Data	HZF	03/07/2015	
		HZF			△△ A1	Modify Data	HZF	04/20/2011	
		DRAWING BY			△△ A0	NEW RELEASE		HZF	05/13/2009
		HAO							
SCALE	NONE	REV.	A3	UNIT mm		NO. REV.	REVISIONS	CHK	DATE