

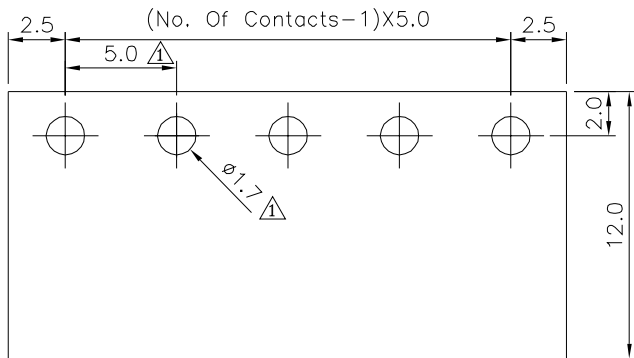
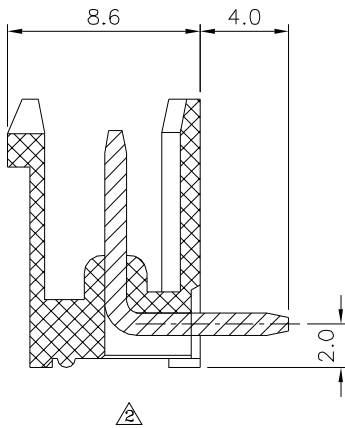


J
I
H
G
F
E
D
C
B
A

J
I
H
G
F
E
D
C
B
A

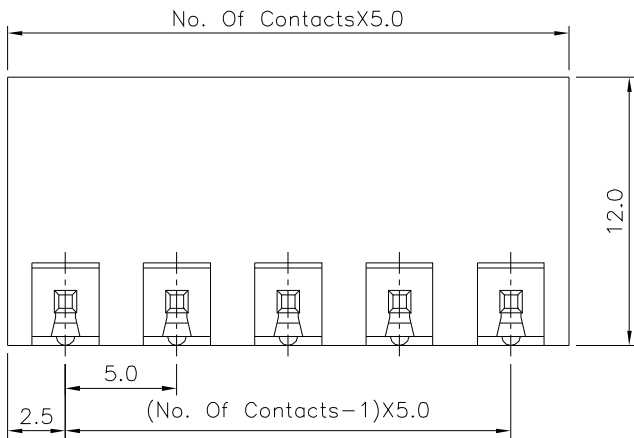

Recommended P.C.B. Layout

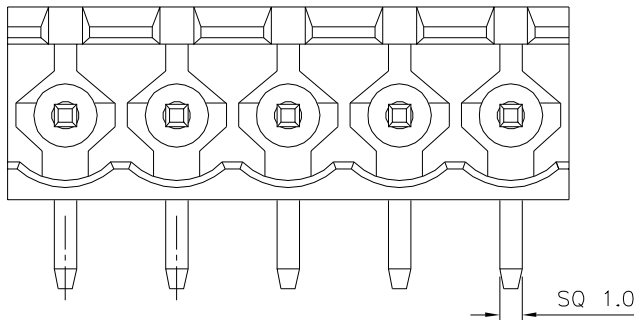

△△△ SPECIFICATION
Current Rating:16A
Voltage Rating:300V AC
Withstand Voltage:2500V AC/Minute
Using Temperature Range:-40°C~+105°C
Insulator:Polyamide+G.F.(UL94V-0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △△△

05337

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


HAO

REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
X° ±1°

UNIT
mm



△ A3

Modify Data

HZF

10/29/2024

△ A2

Modify Data

HZF

03/07/2015

△ A1

Modify Data

HZF

04/20/2011

△ A0

NEW RELEASE

HZF

05/13/2009

NO. REV.

REVISIONS

CHK

DATE