


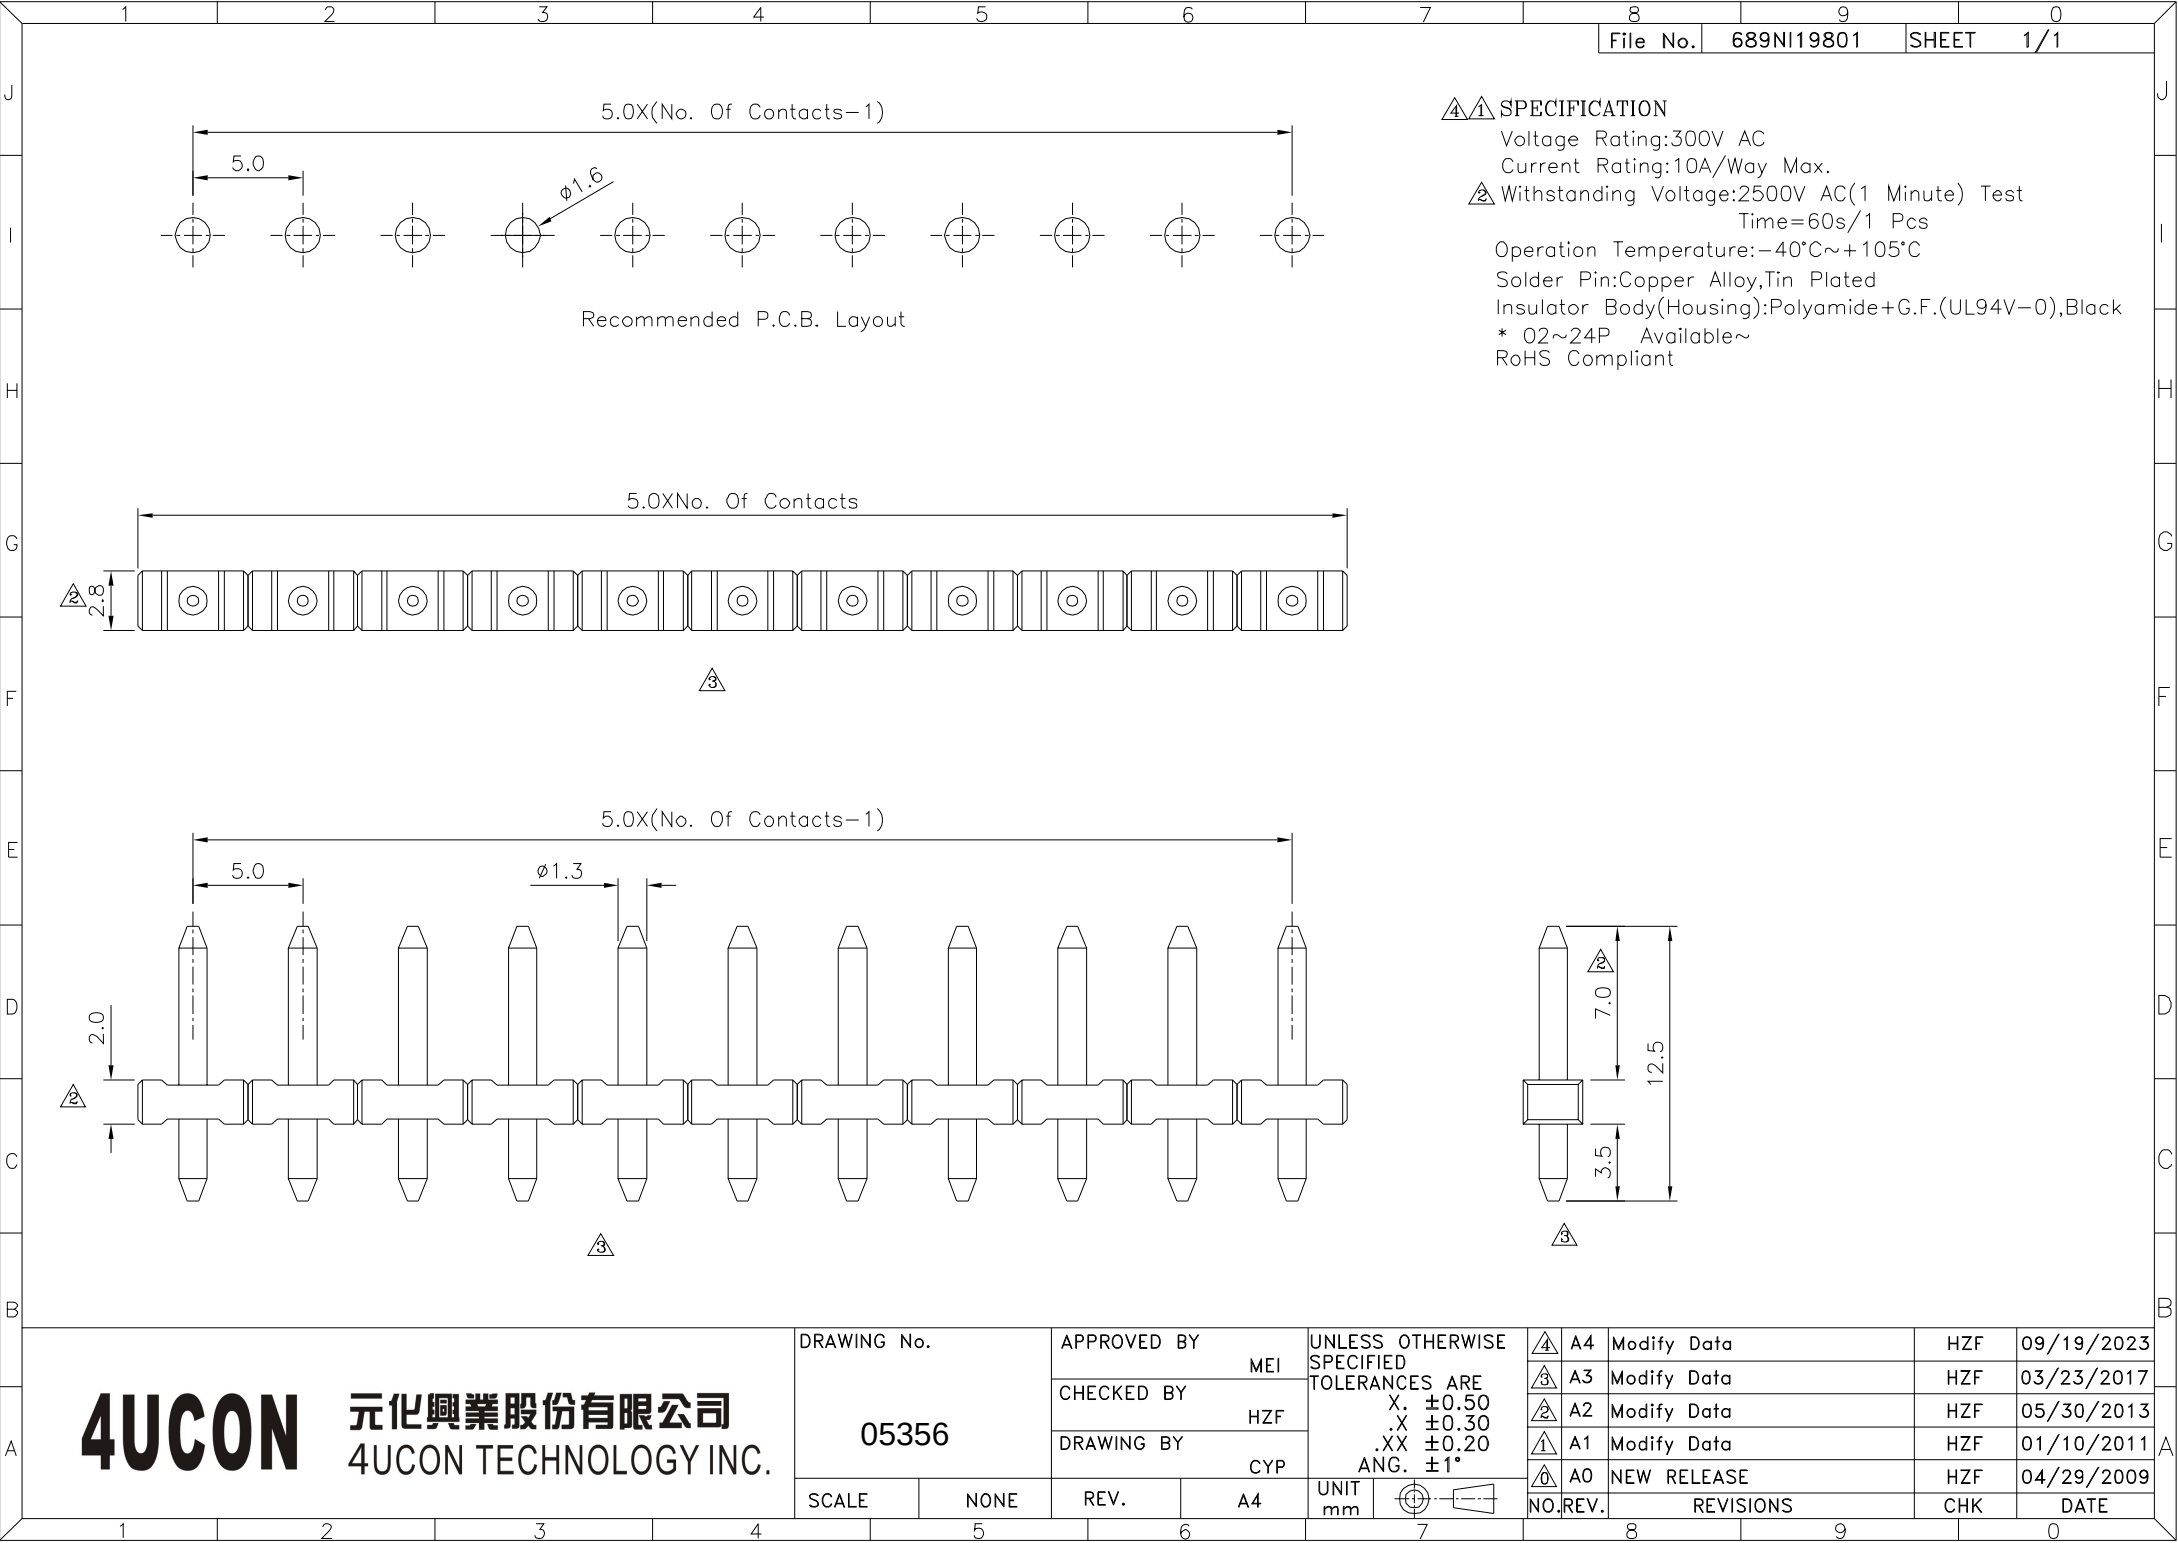

4.1 SPECIFICATION

Voltage Rating:300V AC

Current Rating:10A/Way Max.

Withstanding Voltage:2500V AC(1 Minute) Test
Time=60s/1 Pcs

Operation Temperature:-40°C~+105°C

Solder Pin:Copper Alloy,Tin Plated

Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Black

* 02~24P Available~

RoHS Compliant