
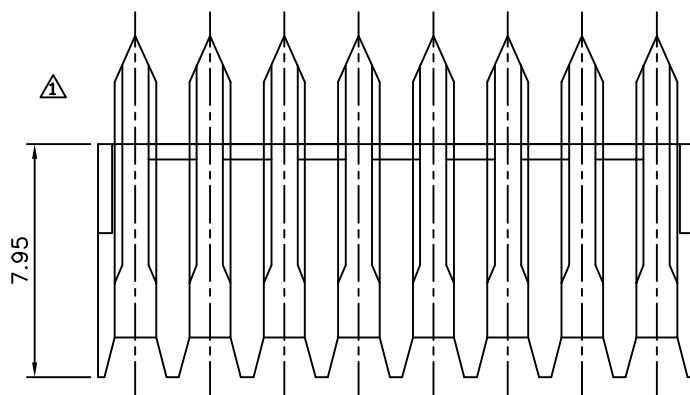
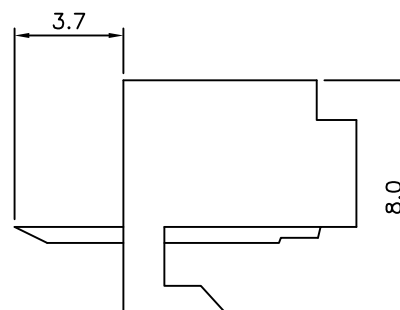


Recommended P.C.B. Layout

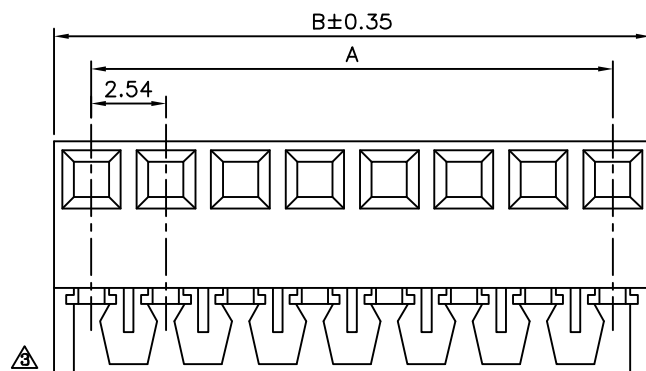

△△ SPECIFICATION

Current:2.5A Max.
Voltage:250V AC Max.
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Dielectric Withstanding Voltage:1500V AC
Temperature Range:0°C~+75°C
Contact:Brass,Tin Plated Over Nickel
△ Housing:PA66(UL94V-2),White
RoHS Compliant

Pin	A	B
2	2.54	5.10
3	5.08	7.64
4	7.62	10.18
5	10.16	12.72
6	12.70	15.26
7	15.24	17.80
8	17.78	20.34
9	20.32	22.88
10	22.86	25.42
11	25.40	27.96
12	27.94	30.50
13	30.48	33.04
14	33.02	35.58
15	35.56	38.12
16	38.10	40.66
17	40.64	43.20
18	43.18	45.74
19	45.72	48.28
20	48.26	50.82
21	50.80	53.36
22	53.34	55.90
23	55.88	58.44
24	58.42	60.98
25	60.96	63.52
26	63.50	66.06
27	66.04	68.60
28	68.58	71.14
29	71.12	73.68

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

05435

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SONG


REV.

A3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.35
.XX ±0.10

UNIT
mm



△ A3

Modify Data

HZF

06/27/2013

△ A2

Modify Data

HZF

10/13/2011

△ A1

Modify Data

HZF

08/12/2009

△ A0

NEW RELEASE

HZF

05/02/2006

NO. REV.

REVISIONS

CHK

DATE