


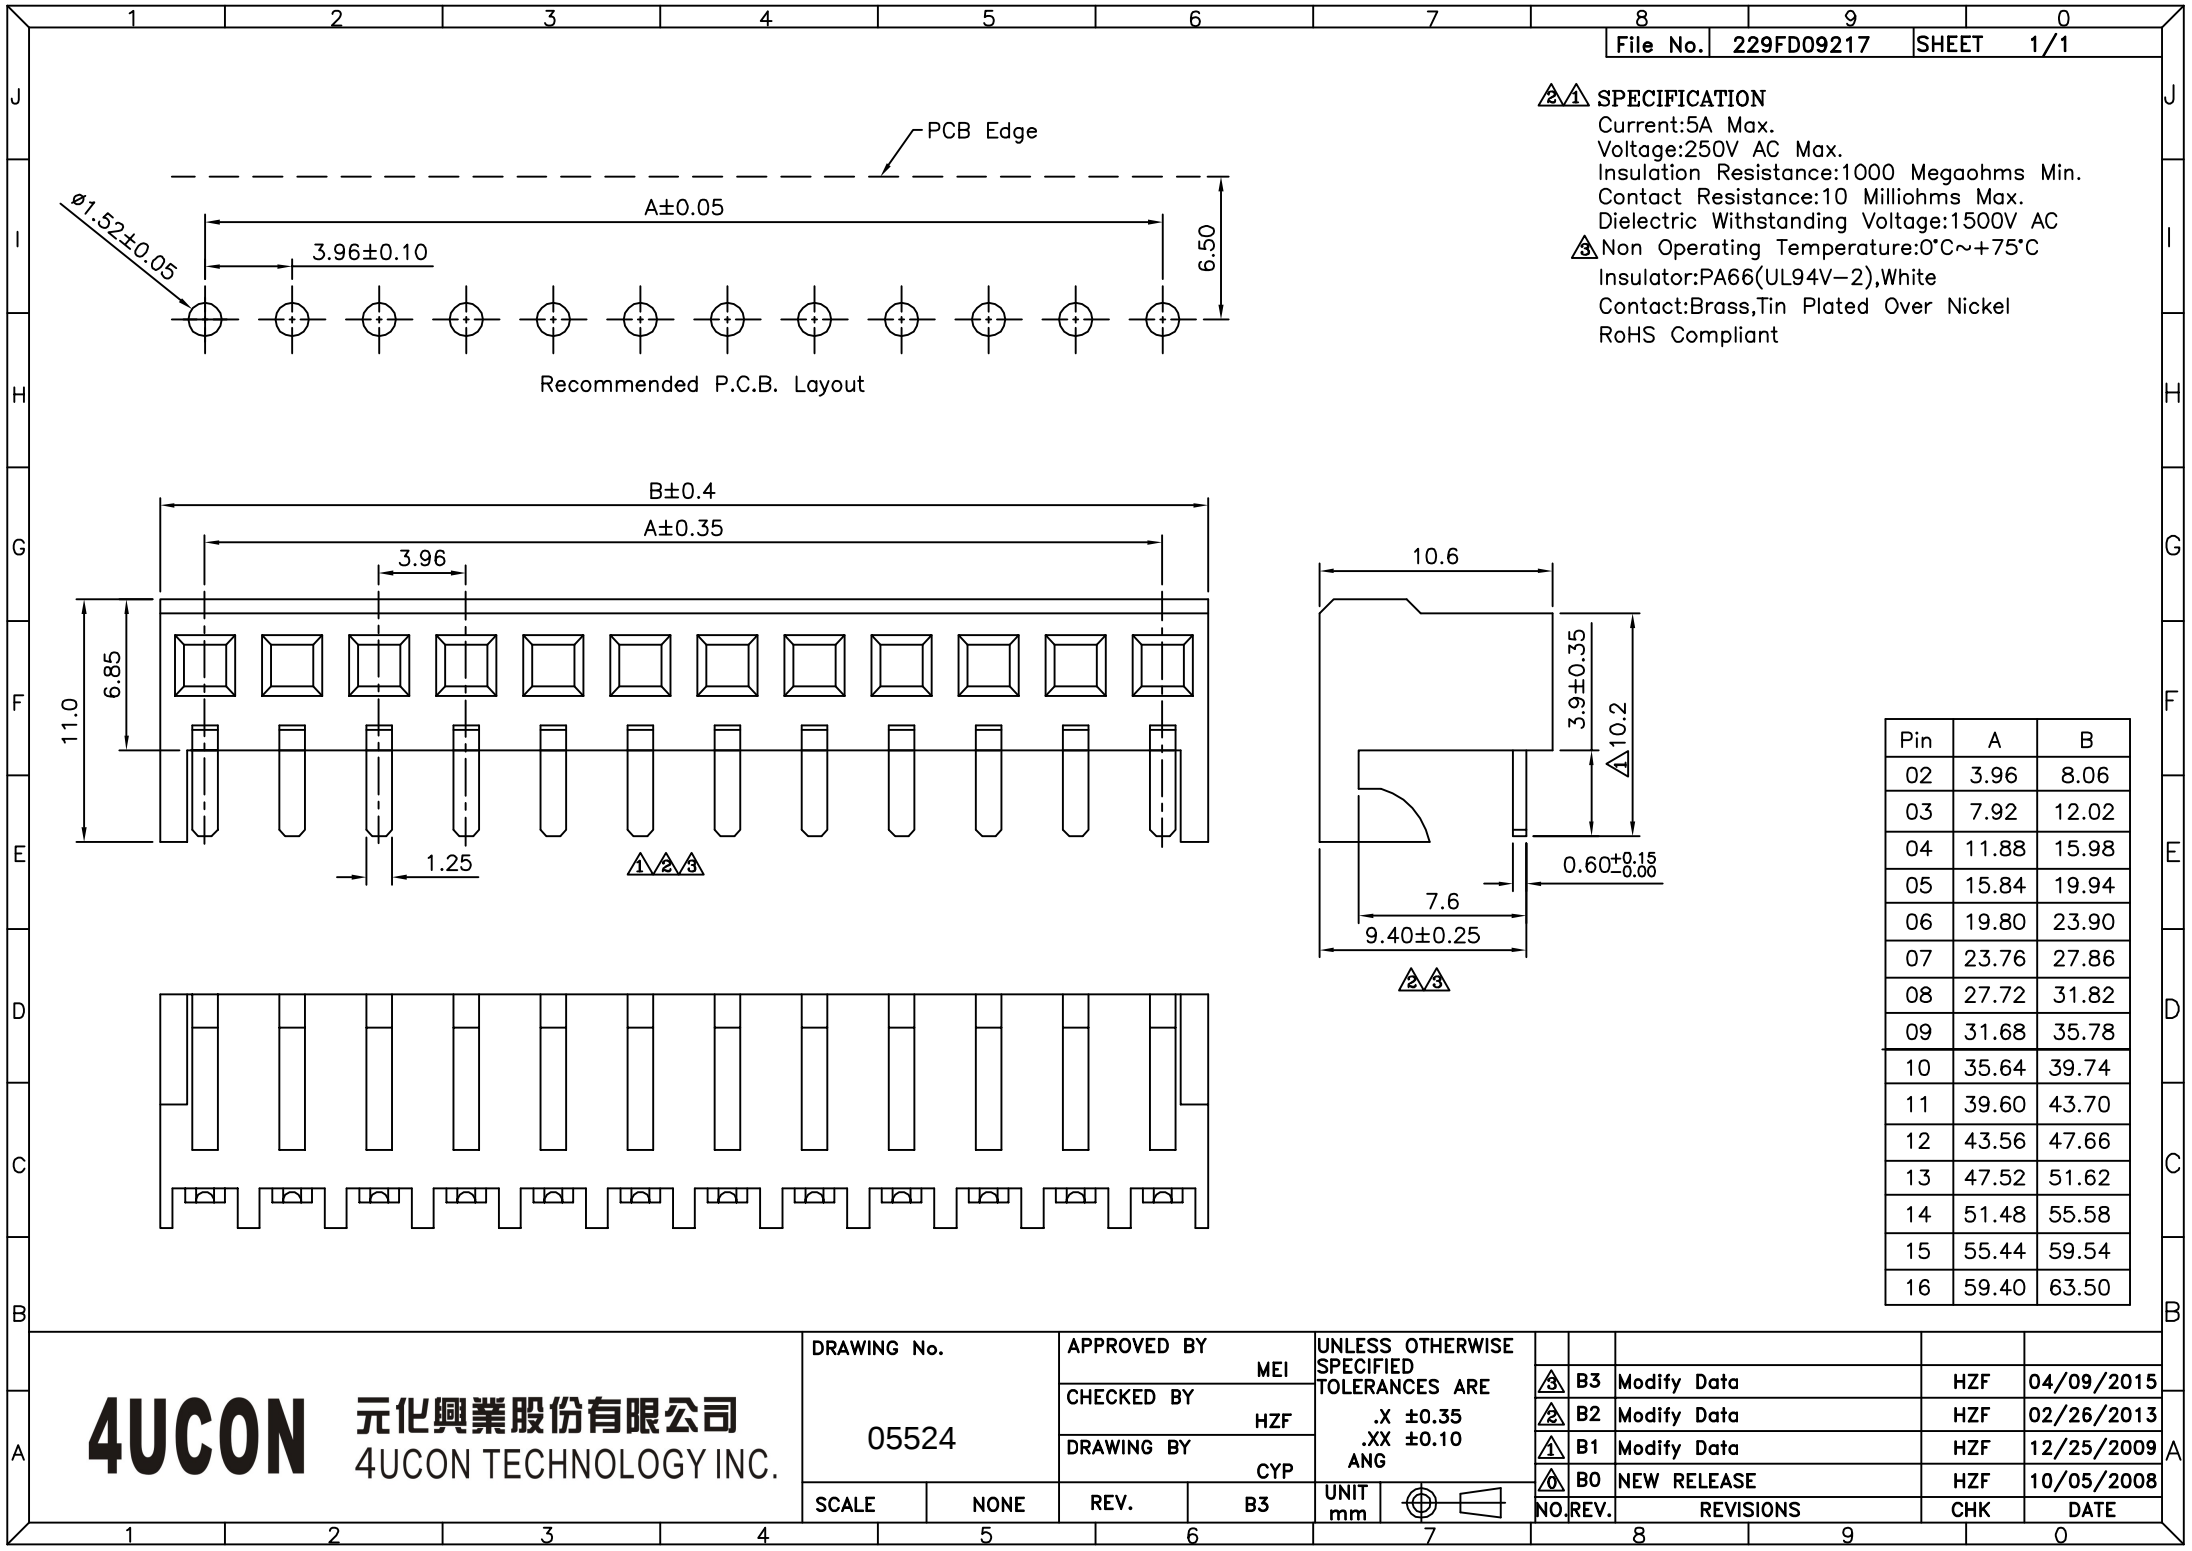

△△ SPECIFICATION
Current:5A Max.
Voltage:250V AC Max.
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:10 Milliohms Max.
Dielectric Withstanding Voltage:1500V AC
△ Non Operating Temperature:0°C~+75°C
Insulator:PA66(UL94V-2),White
Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

Pin	A	B
02	3.96	8.06
03	7.92	12.02
04	11.88	15.98
05	15.84	19.94
06	19.80	23.90
07	23.76	27.86
08	27.72	31.82
09	31.68	35.78
10	35.64	39.74
11	39.60	43.70
12	43.56	47.66
13	47.52	51.62
14	51.48	55.58
15	55.44	59.54
16	59.40	63.50

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	HZF
05524		DRAWING BY	CYP
		REV.	B3
SCALE	NONE		

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ± 0.35
.XX ± 0.10
ANG

△ B3	Modify Data		HZF	04/09/2015	
△ B2	Modify Data		HZF	02/26/2013	
△ B1	Modify Data		HZF	12/25/2009	
△ B0	NEW RELEASE		HZF	10/05/2008	
NO. REV.	REVISIONS	CHK	DATE		