
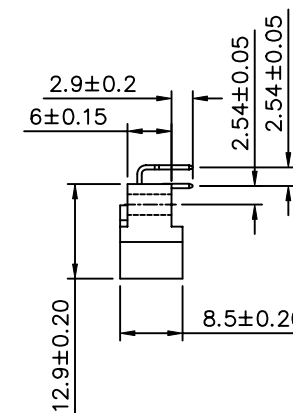
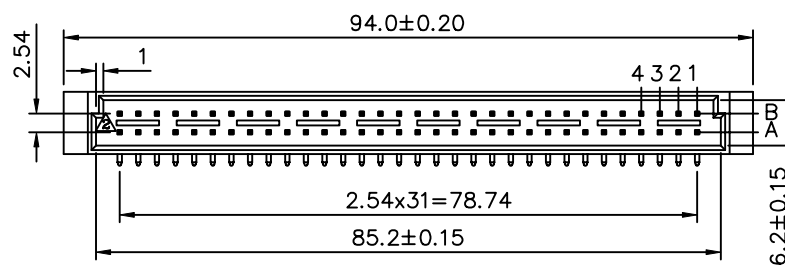
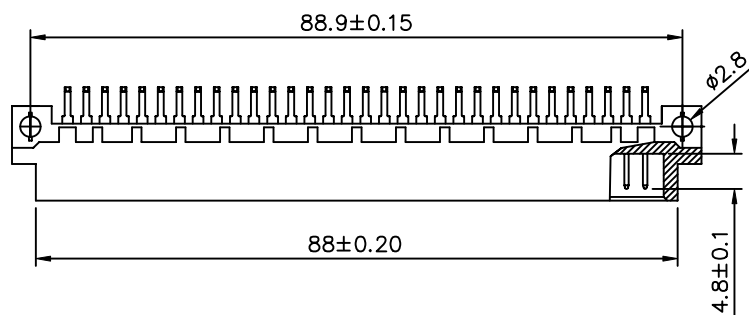


SPECIFICATION

Current Rating: 2 Amp
 Dielectric Withstanding Voltage: AC 1000V For 1 Minute
 Insulator Resistance: 1000 Megaohms Min. At DC 500V
 Contact Resistance: 30 Milliohms Max. At DC 100mA
 Operating Temperature: -55°C~+105°C
 Housing: 30% Glass Filled PBT, UL 94V-0
 Contact: Brass, Gold(2~3u")/Tin(80~100u")
 RoHS Compliant

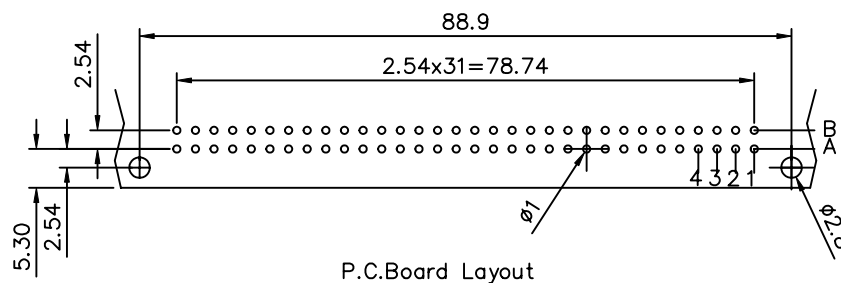

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

05627

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE
 X. ±0.50
 .X ±0.25
 .XX ±0.10
 ANG. ±5°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	01/10/2009
△A1		Modify Data	BECKY	08/03/2006
△A0		NEW RELEASE	BECKY	07/20/2004

SCALE

NONE

REV.

A2